




Code in front of series have been extracted from product code, which describes the segment of products, such as type and features.

- High temperature type of Series CX1.
- 5mm tall. Max. thin profile.
- Ideal for backing up of CMOS's, IC's of camera, microcomputers, RAM's, RTC's and the like used in audio, general electronic device, and others.
- Environmental : GREEN CAP™ , RoHS compliance.




Marking color :
White print on a black sleeve

Specifications

Item	Performance				
Category temperature range (°C)	-10 to +85				
Tolerance at rated capacitance (%)	-20 to +80				
Internal resistance at 1 kHz	Rated capacitance (F)	0.047	0.1	0.22	0.33
	Internal resistance (Ω Max.)	200	150	150	150
Characteristics at high and low temperature	Percentage of capacitance change	Within ±30% of the value at 20°C			
	Internal resistance	Four times or less of the initial specified value.			
Endurance (85°C)	Test time	1000 hours			
	Percentage of capacitance change	Within ±30% of the initial measured value			
	Internal resistance	Four times or less of the initial specified value.			
Shelf life (85°C)	Test time : 1000 hours ; Same as endurance.				
Applicable standards	Conforms to JIS C5160 - 1 (IEC 62391 - 1)				

Outline Drawing

Unit : mm

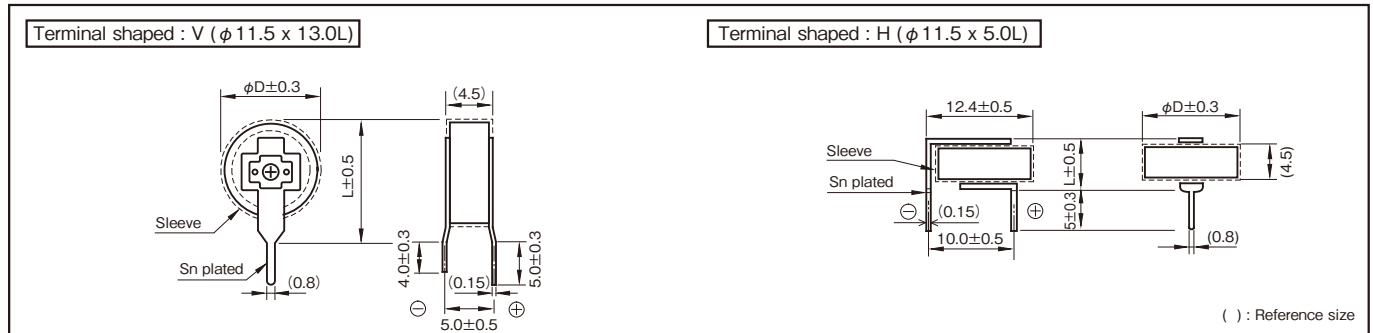

Product code system : 5.5V0.22F (*For general product)

RS*	CXJ	224	5R5		013	U
Category code	Series code	capacitance code	Voltage code	Size code	Lead-forming and packing code	Additional code

- Product code is refer to following table and "Product Code System" pages.
 - Lead-forming and packing code on this page are for standard terminals and standard packing products.
- For standard packing, please refer to the "PACKING" page.

Note

Do not apply external force to products or terminals as stress such as twisting, bending, pushing, or falling of such products or terminals may remove the terminals, resulting in an open/short circuit or liquid leakage.
Avoid applying excessive heat to capacitors during heating of an adhesive curing oven.
For details, refer to the precautions in use of DYNACAP.

Standard Ratings

Max. operating voltage (V)	Rated capacitance (F)	ELNA Parts No.	φD×L (mm)
5.5	0.047	RSCXJ4735R5F13013U	11.5×13.0
		RSCXJ4735R5F05013U	11.5× 5.0
5.5	0.1	RSCXJ1045R5F13013U	11.5×13.0
		RSCXJ1045R5F05013U	11.5× 5.0
5.5	0.22	RSCXJ2245R5F13013U	11.5×13.0
		RSCXJ2245R5F05013U	11.5× 5.0
5.5	0.33	RSCXJ3345R5F13013U	11.5×13.0
		RSCXJ3345R5F05013U	11.5× 5.0