



Features/Benefits

- **Connect headsets and phones**
- **Answer and hang up for telephone**
- **Various lever designs**

Typical Applications

- **Telecommunication**
- **Computer peripherals**

Specifications


CONTACT ARRANGEMENT: DPDT
CONTACT RATING: 0.2 A @ 30 VDC
INITIAL CONTACT RESISTANCE: 50m Ω max.
INSULATION RESISTANCE: 100M Ω min. @ 500 VDC
DIELECTRIC STRENGTH: 500 V AC (50-60 Hz)
OPERATING TEMPERATURE: -20°C to +70°C
OPERATING FORCE: 50 \pm 20 gf

Materials

LEVER: POM (UL94 HB)
COVER: POM (UL94 HB)
TERMINAL: Silver plated






NOTE: Specifications and materials listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.

PART NUMBER	LIFE CYCLE	PACKAGING
HS-2206-A1 NS	300,000 cycles	5,000 pieces

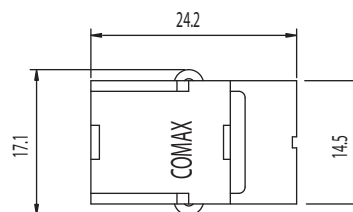

		TRAVEL POSITION (X)	
①	③	ON	OFF
②	③	OFF	ON
④	⑥	ON	OFF
⑤	⑥	OFF	ON

6.85 Max 2.65 Min (m/m)


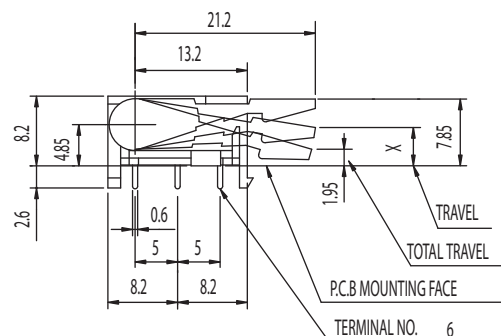


Third Angle Projection

Dimensions are shown: mm
Specifications and dimensions subject to change

Hook Switch

PART NUMBER	LIFE CYCLE	PACKAGING
HS-2206-D NS	100,000 cycles	5,000 pieces

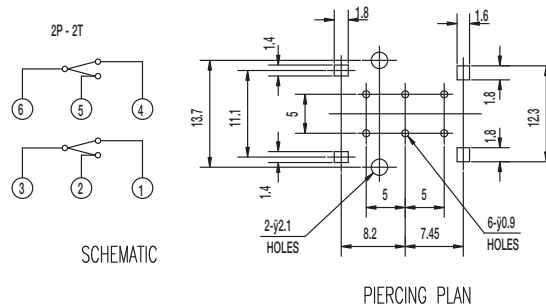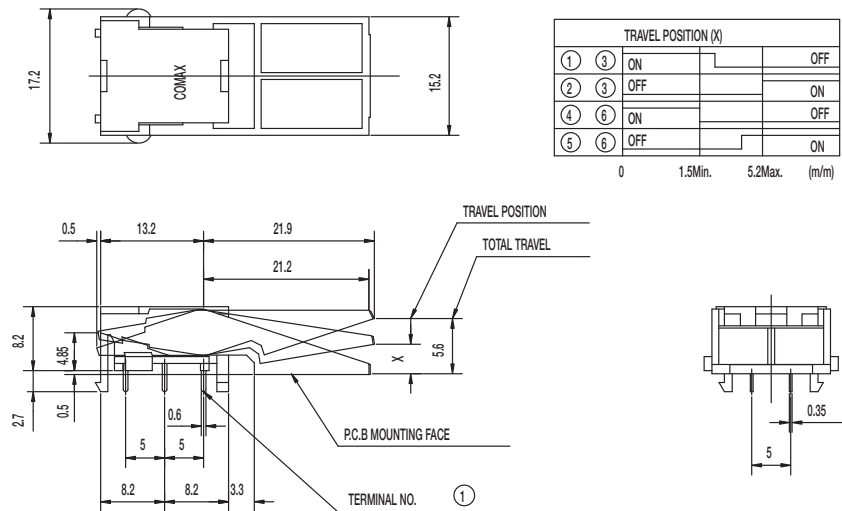

PART NUMBER	LIFE CYCLE	PACKAGING
HS-2206-E NS	100,000 cycles	5,000 pieces

