



CJT-T-P-HH-RA-TH1



CJT-T-P-HH-RA-BH1



CJT SERIES

100 Ω CIRCULAR RF TWINAX JACK

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?CJT-TH or www.samtec.com?CJT-BH

Shell Material:

Brass

Insulator Material:

PTFE

Contact Material:

Phosphor Bronze

Operating Temperature:

-20 °C to +105 °C

Frequency Range:

0 - 4 GHz

Working Voltage:

200 VAC

Impedance:

100 Ω





RoHS Compliant:

Yes



Lead-Free Solderable:

Yes



Mates with:
C28S

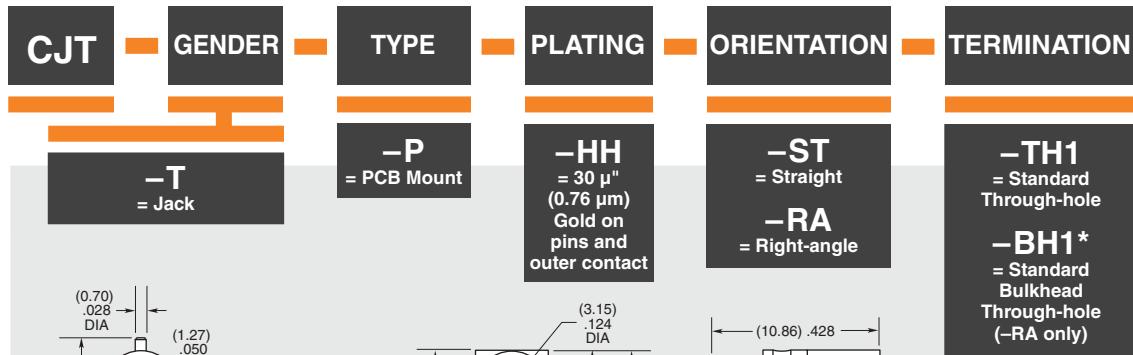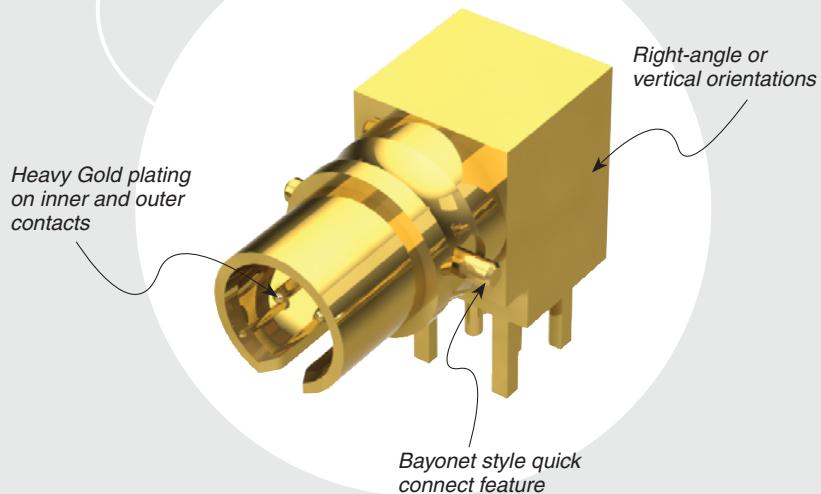

-ST-TH1



-RA-TH1

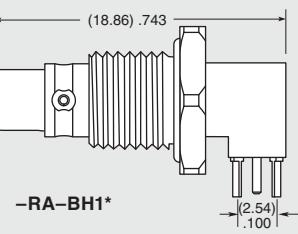

-RA-BH1*

* Lock washer, nut and gasket supplied unassembled with Bulkhead option.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

All parts within this catalog are built to Samtec's specifications. Requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.