
#### **DUAL BAND OMNI DIRECTIONAL**

806-960 / 1710-1990 MHz

# R380900323

Series: ANTENNA

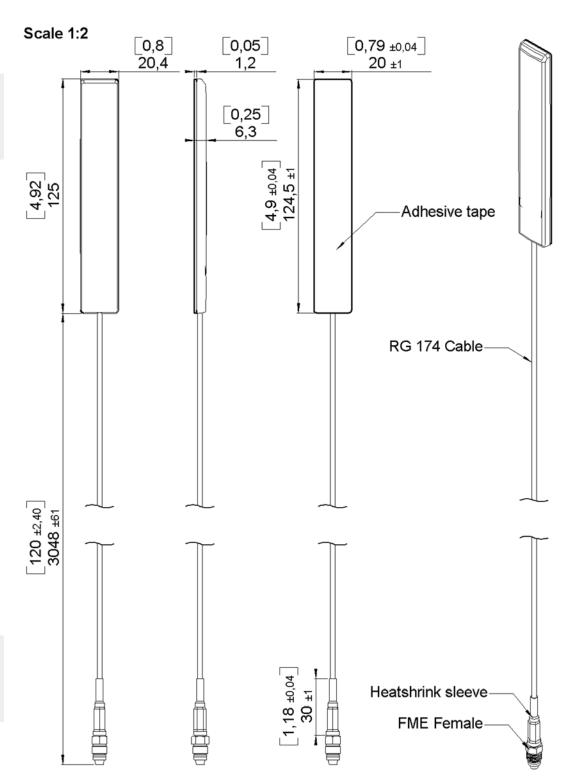

All dimensions are inches

**Issue: 0716** 

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



Frequency:

#### **DUAL BAND OMNI DIRECTIONAL**

R380900323

806-960 / 1710-1990 MHz

Series: ANTENNA

### **ELECTRICAL CHARACTERISTICS**

SMR-AMPS-GSM DCS-PCS

**806-960** MHz **1.71-1.99** GHz

Nominal Impedance :  $50 \Omega$ 

VSWR : **2:1** Max **2:1** Max

Gain (Radiating element):

2 dBi Max

2 dBi Max

Gain (Including Cable Losses): -1 dBi Max -2.5 dBi Max

Radiation Pattern: Omni-directional in the horizontal plane

Polarization: VERTICAL VERTICAL

Power withstanding: 3 W

Connector type : **FME (Female) R280.354.000** (radiall P/N)

Cable type: RG 174 BLACK

Length:  $3048 \text{ mm} \pm 61 \text{ mm} [10 \text{ ft}]$ 

## **MECHANICAL CHARACTERISTICS**

Plastic radome: UL - 94 V0 Listed Material / Bayblend FR110

Color: BLACK

Weight: 53.9 g

Overall length : 125 x 20.4 x 6.3 mm

Cable retention:

Pull off: 40 N mini

Mounting system: Adhesive tape

## **ENVIRONMENTAL CHARACTERISTICS**

Operating temperature :  $-20/+50 \,^{\circ}$  C

**Issue: 0716** 

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

