
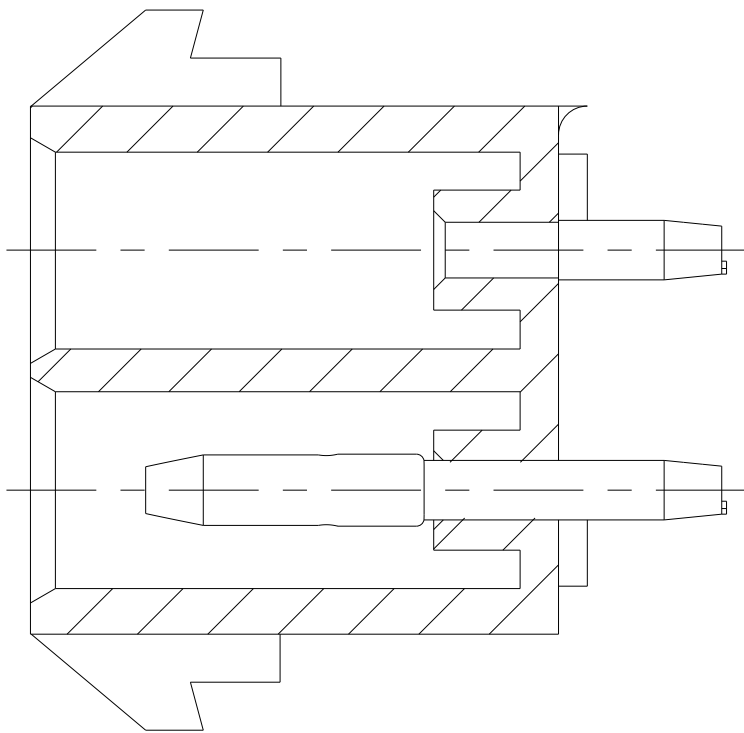
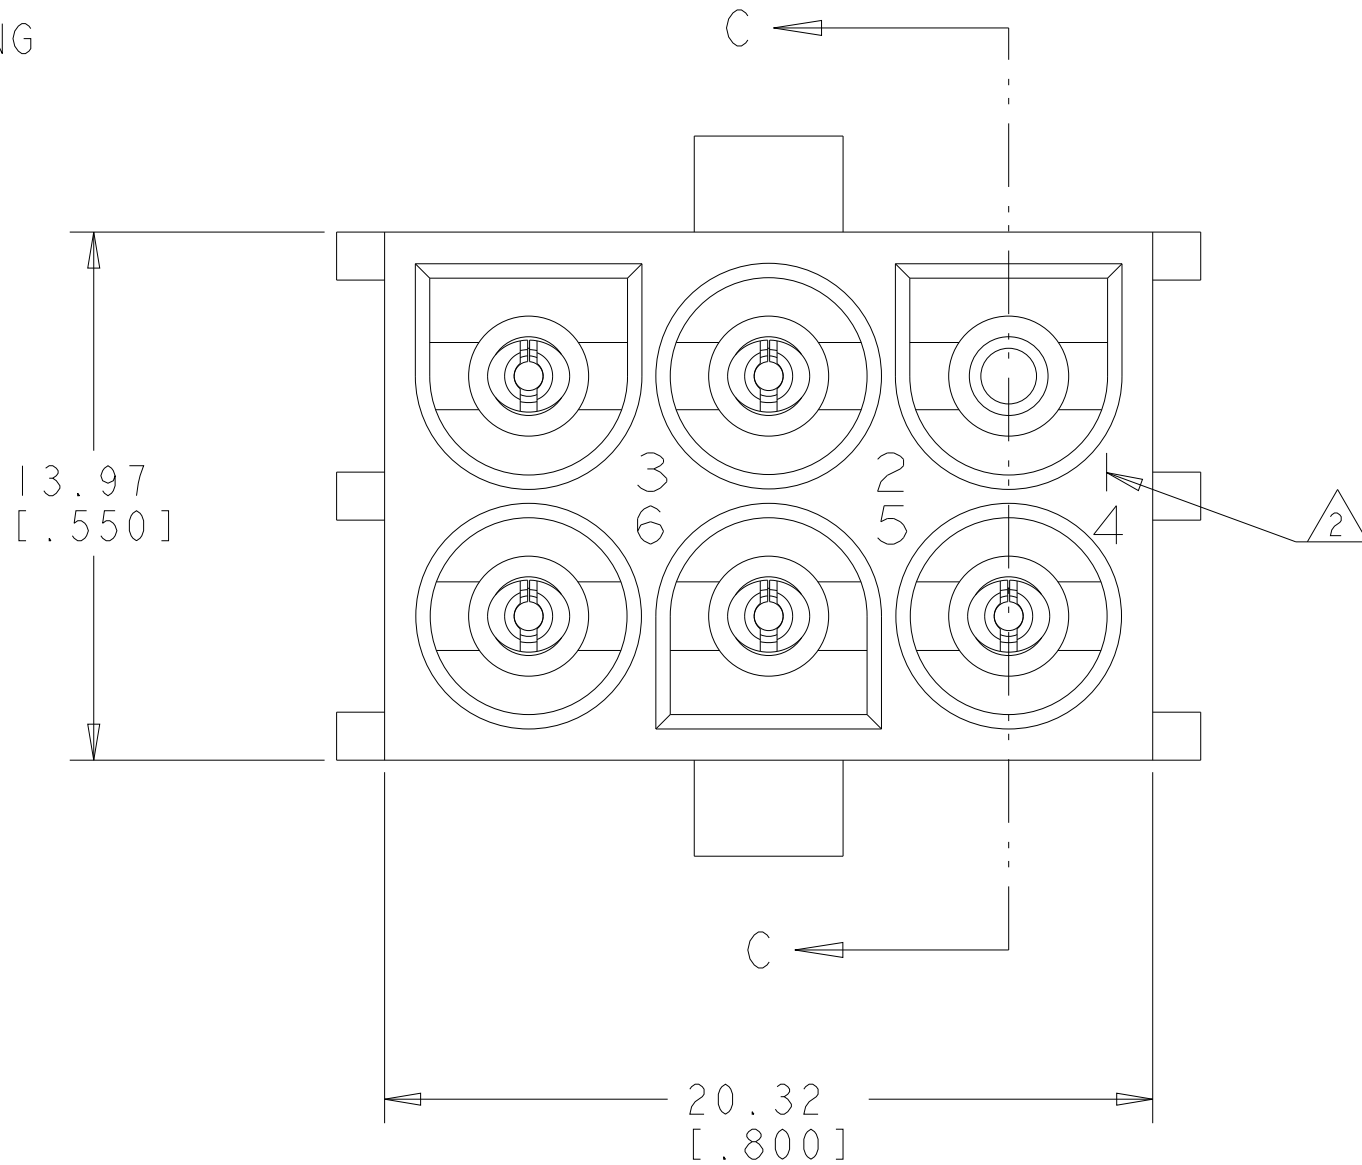
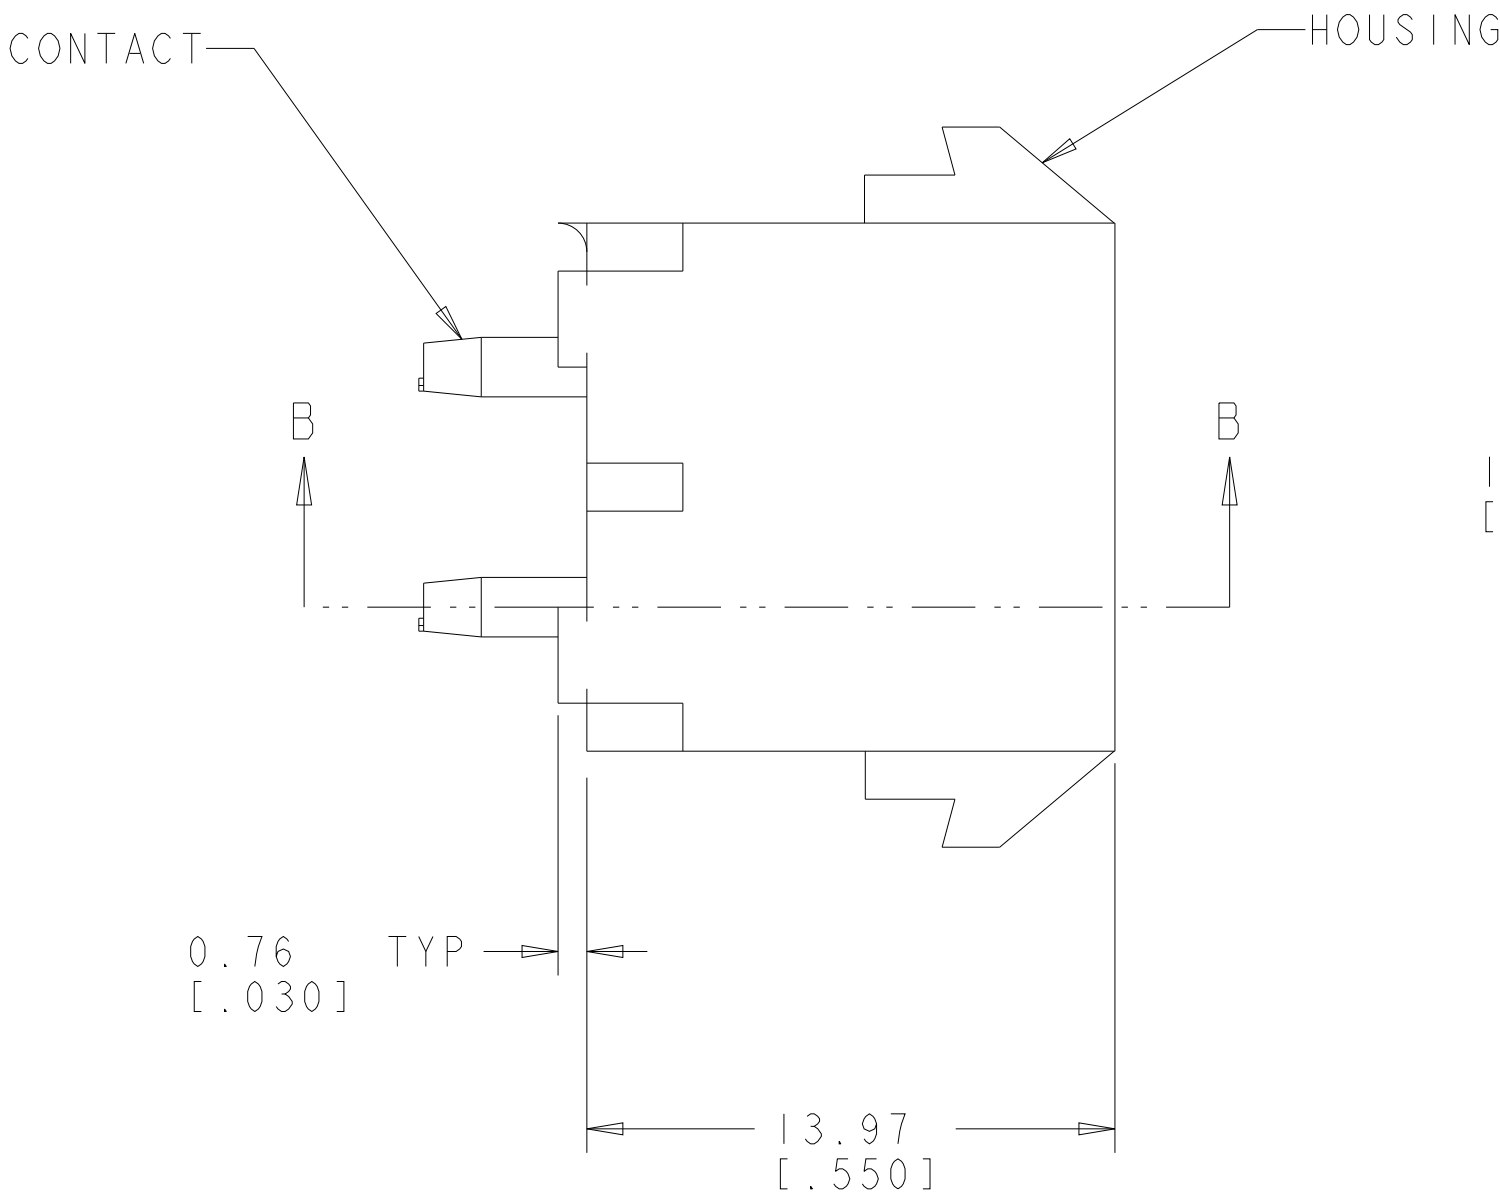



LOC		DIST		REVISIONS				
CM	00	P	LTR	DESCRIPTION	DATE	DWN	APVD	
		A		RELEASED PER WR-05-27	03MAY05	KW	SR	
		A1		REVISED PER ECR-21-118133	22OCT2021	SS	VS	

1. PARTS COMPLY TO AMP SOLDERABILITY SPECIFICATION 109-11-3.
- 2

 CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.
3. DIMENSIONS IN BRACKETS ARE IN INCHES.
4. DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY CONDITION. ADDITIONAL 2% GROWTH DUE TO END USE LOCATION MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.

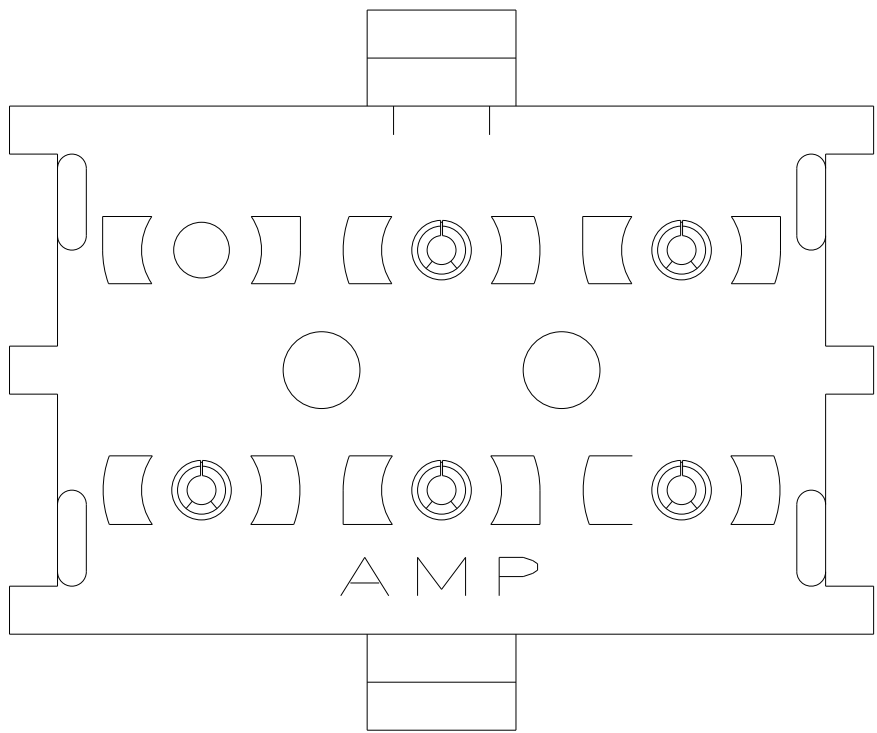


SECTION C-C

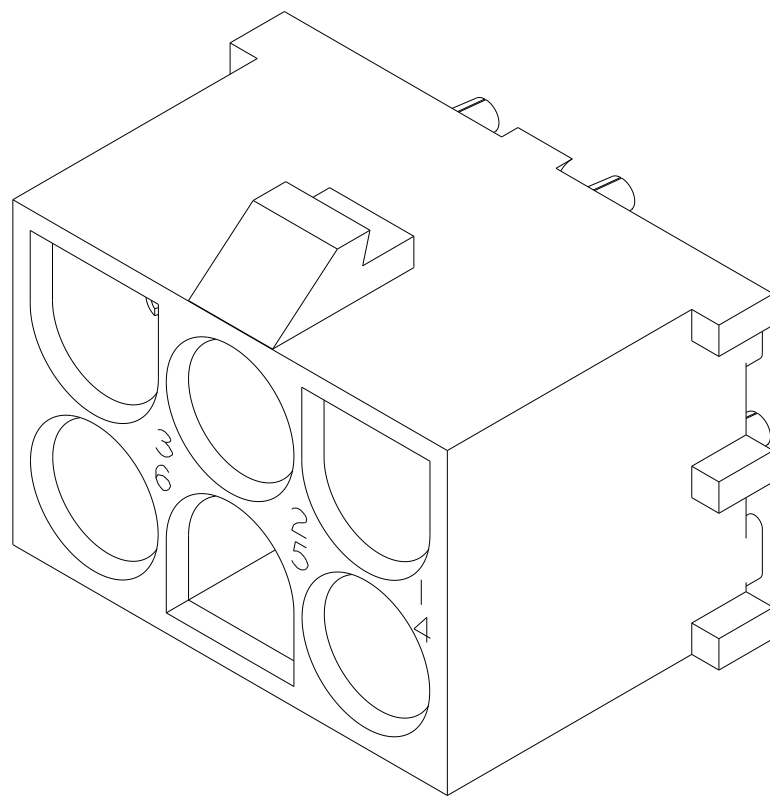


SCALE 4:1


1586680-1 SHOWN

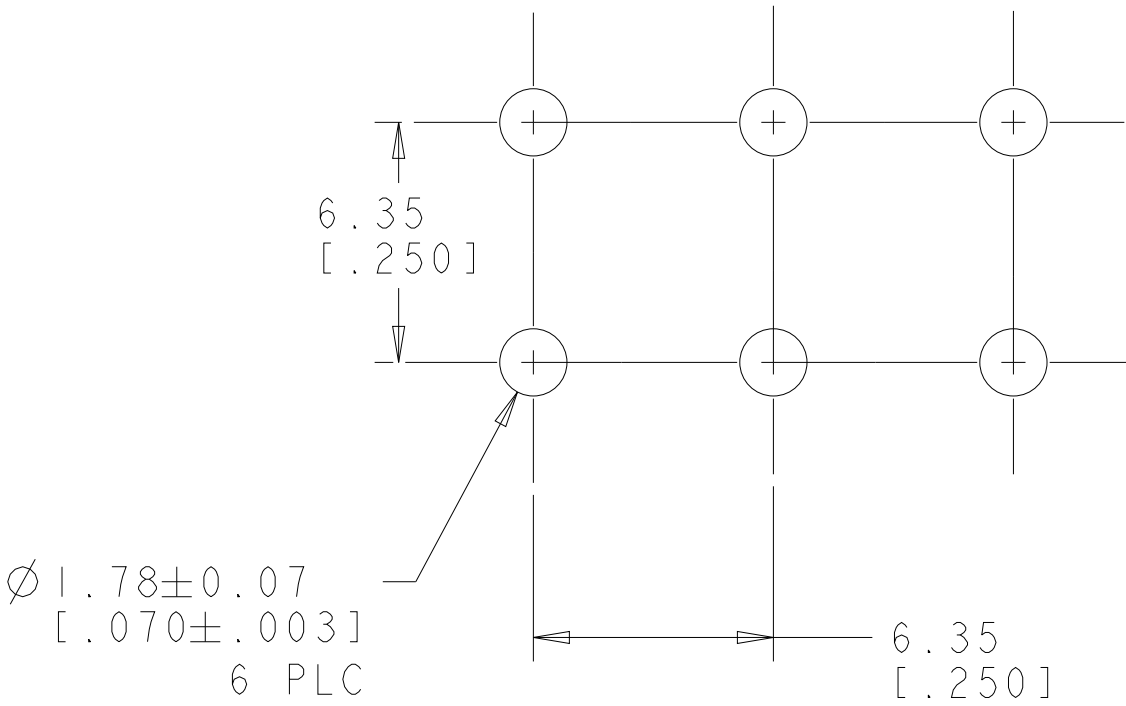

RECOMMENDED MOUNTING HOLE PATTERN FOR 1.57 [.062] THICK P.C. BOARD HOLE THAT CORRESPONDS TO REMOVED CONTACT CAN BE OMITTED

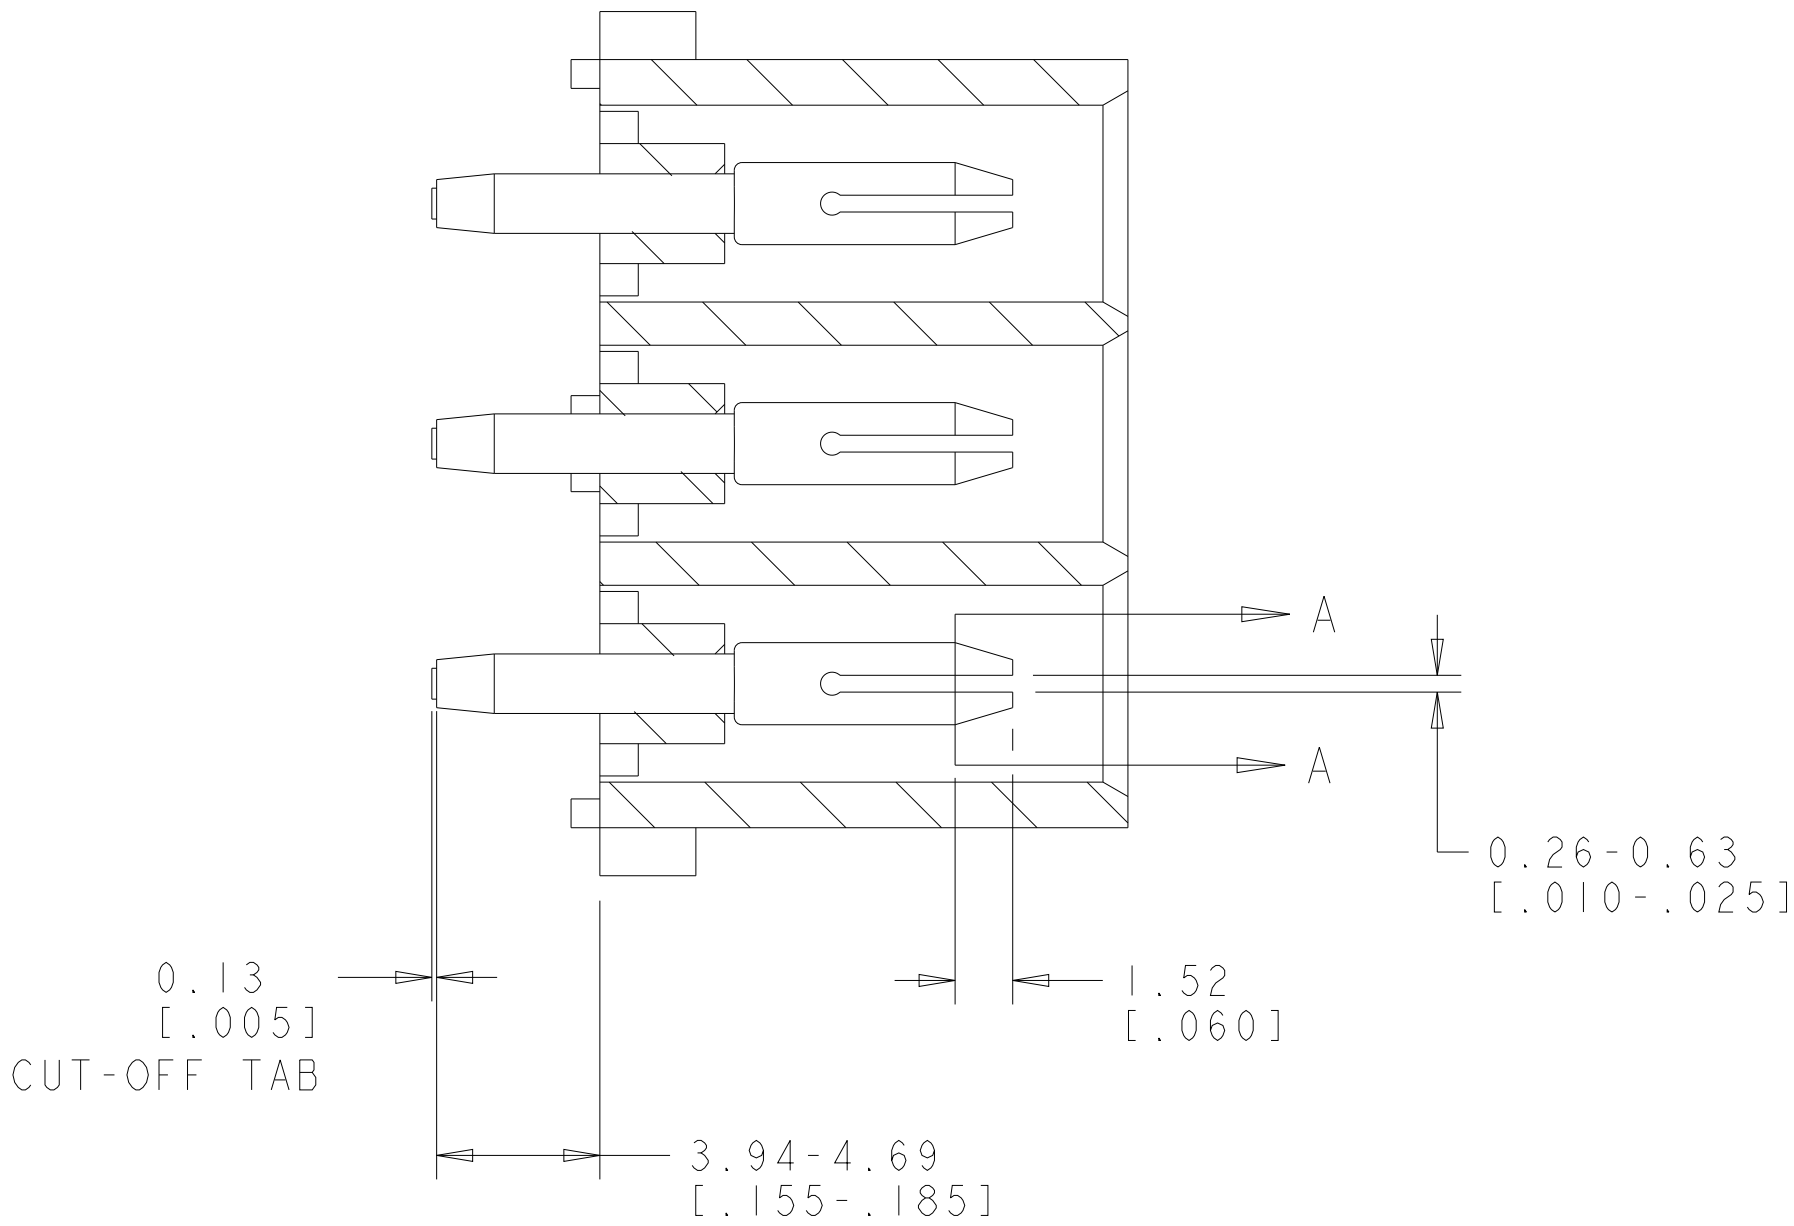


SECTION B-B

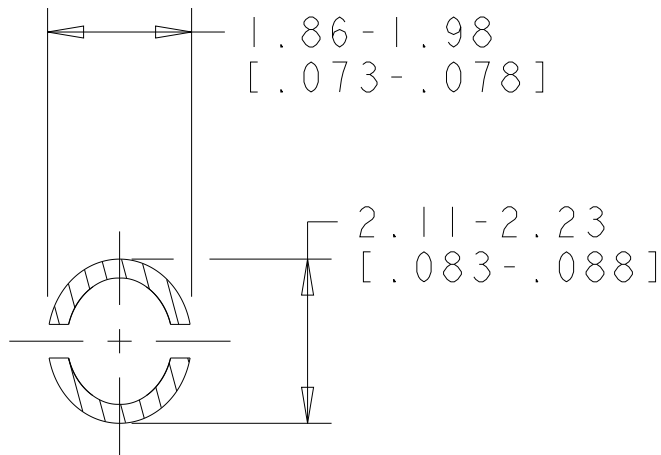

SECTION A-A
SCALE 10:1

5	PHOSPOR BRONZE, PRE-TIN	NYLON, UL94V-0, WHITE	1586680-5
1	PHOSPOR BRONZE, PRE-TIN	NYLON, UL94V-0, WHITE	1586680-1
PIN NO OMITTED	PIN CONTACT MATERIAL AND FINISH	HOUSING MATERIAL AND COLOR	PART NUMBER



DIMENSIONS: mm[INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DWN K. WHITAKER CHK S. RIDGILL APVD S. RIDGILL PRODUCT SPEC		24-NOV-03 24-NOV-03 24-NOV-03		NAME PIN HEADER ASSEMBLY, 6 CIRCUIT, STANDARD TAIL, SELECTIVELY LOADED, UNIVERSAL MATE-N-LOK(TM)	
MATERIAL SEE TABLE		FINISH SEE TABLE		APPLICATION SPEC		WEIGHT		SIZE A1	
						CAGE CODE		DRAWING NO 00779	
								REV A1	