


POSITRONIC INDUSTRIES RELEASES THE DATA ON THIS DRAWING TO BE RELIABLE SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE. THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION. POSITRONIC INDUSTRIES ASSUMES NO LIABILITY OR RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
8-3-05	NC	ECO 24444	RCW	YK	TK
8-14-06	A	ECO 25503		ME	

SK6412

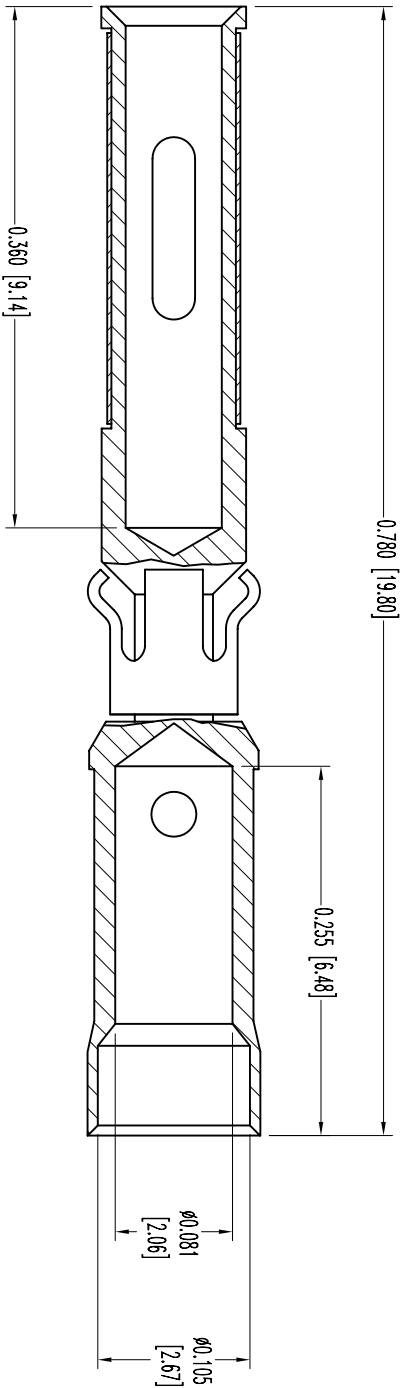

- NOTES:
1. MATERIAL AND FINISHES:
CONTACT: COPPER ALLOY, GOLD FLASH OVER NICKEL PLATE.
RETENTION RING: BERYLLIUM COPPER, GOLD FLASH OVER NICKEL PLATE.
SPRING CLIP: BERYLLIUM COPPER, GOLD FLASH OVER NICKEL PLATE.
 2. THIS MOS ALLOWS FOR FEMALE CONTACTS TO HAVE AN OVERALL LENGTH OF 0.780 [19.81] AND A MATING DIAMETER DEPTH OF 0.360 [9.14]
 3. CONTACTS ARE ROHS COMPLIANT PER ROHS DIRECTIVE 2002/95/EC OF 27 JAN 2003.
 4. DIMENSIONS ARE IN INCHES [MILLIMETERS]



POSITRONIC INDUSTRIES INC.
www.connectpositronic.com



DECIMAL TOL.
 ± 0.015 [0.38]

PCI SERIES

SCALE
N.T.S.

DRAWN BY
YK

APPROVED BY
RCW

TITLE

FC114N2/AA-1565.0

ANGULAR TOL.
 $\pm$

DATE
8-3-05

DRAWING NUMBER
SK6412

REV.
A