




Part Number : [5026030770](#)
Product Description : 2.00mm Pitch, Micro-Latch PCB Header, Single Row, Vertical, Through Hole, Gold (Au) Plating, 7 Circuits, Tray
Series Number : 502603
Status : Active
Product Category : PCB Headers and Receptacles

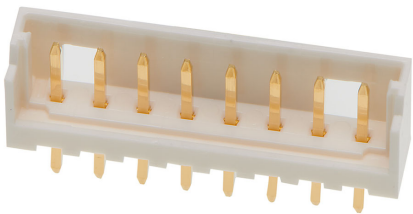

Documents & Resources


Drawings
[5026030770_sd.pdf](#)

3D Models and Design Files
[5026030770_stp.zip](#)

Specifications
[5026039200-SPK-200.pdf](#)
[510650001-PS-000.pdf](#)
[510651001-PS-000.pdf](#)

Product Environment Compliance

Compliance

| | |
|--------------------|---|
| GADSL/IMDS | Not Relevant |
| China RoHS |  |
| EU ELV | Not Relevant |
| Low-Halogen Status | Not Low-Halogen per IEC 61249-2-21 |
| REACH SVHC | Not Contained per D(2024)7663-DC (21 Jan 2025) |
| EU RoHS | Compliant per EU 2015/863 |

- Multiple Part Product Compliance Statements
- Eu RoHS
 - REACH SVHC
 - Low-Halogen

Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

EU RoHS Certificate of Compliance

Part Details

General

| | |
|----------------|---|
| Status | Active |
| Category | PCB Headers and Receptacles |
| Series | 502603 |
| Description | 2.00mm Pitch, Micro-Latch PCB Header, Single Row, Vertical, Through Hole, Gold (Au) Plating, 7 Circuits, Tray |
| Application | Signal, Wire-to-Board |
| Component Type | PCB Header |
| Product Name | Micro-Latch |
| UPC | 800756695259 |

Electrical

| | |
|-------------------------------|------|
| Current - Maximum per Contact | 2.0A |
| Voltage - Maximum | 250V |

Physical

| | |
|--------------------------------|---------|
| Breakaway | No |
| Circuits (Loaded) | 7 |
| Circuits (maximum) | 7 |
| Color - Resin | Natural |
| Durability (mating cycles max) | 30 |
| First Mate / Last Break | No |
| Glow-Wire Capable | No |
| Lock to Mating Part | Yes |
| Material - Metal | Brass |
| Material - Plating Mating | Gold |

| | |
|-------------------------------|----------------|
| Material - Resin | Polyamide |
| Net Weight | 239.200/mg |
| Number of Rows | 1 |
| Orientation | Vertical |
| Packaging Type | Tray |
| PC Tail Length | 3.50mm |
| PCB Locator | No |
| PCB Retention | Yes |
| PCB Thickness - Recommended | 1.60mm |
| Pitch - Mating Interface | 2.00mm |
| Plating min - Mating | 0.100µm |
| Polarized to Mating Part | Yes |
| Polarized to PCB | No |
| Shrouded | Partial |
| Stackable | No |
| Temperature Range - Operating | -55° to +105°C |
| Termination Interface Style | Through Hole |

Mates With / Use With

Mates with Part(s)

| Description | Part Number |
|--|--------------|
| Micro-Latch Single Row Receptacle Housings | <u>51065</u> |

This document was generated on Apr 26, 2025