

OMRON

## E3FA PHOTOELECTRIC SENSORS

A new generation in sensing performance



- » Simplicity
- » One family for all
- » Non-stop detection

realizing

# A new generation in sensing performance!

*Producing more than a million per year, Omron is a world leader in photoelectric sensors. Backed by more than 40 years of experience, Omron is constantly enhancing its portfolio and has now completely redesigned and expanded its popular M18 cylindrical range. Renowned for its high quality and product reliability, Omron's new generation of photoelectric sensors represents one of the largest varieties of dependable and easy-to-use photoelectric sensors on the market. Regardless of your industry or application, the E3FA series has the right sensor for the job at the best price versus performance.*

## **Simplicity**

- Simple selection
- Simple installation

## **One family for all**

- All standard applications covered
- A wide variety of models
- Models designed for special applications


## **Non-stop detection**

- High quality and reliability
- High EMC protection
- High light immunity
- Robust and waterproof housing




## Simplicity

Omron's compact E3FA series of photoelectric sensors is simple and quick to mount, as well as easy and intuitive to set-up. The large and robust adjuster makes life much easier for installers to adjust the sensor, as does the bright, high-power red LED, which is clearly visible for easy alignment, even over longer distances. Similarly, the sensor's LED status indicator can be viewed from long distances and wide angles.

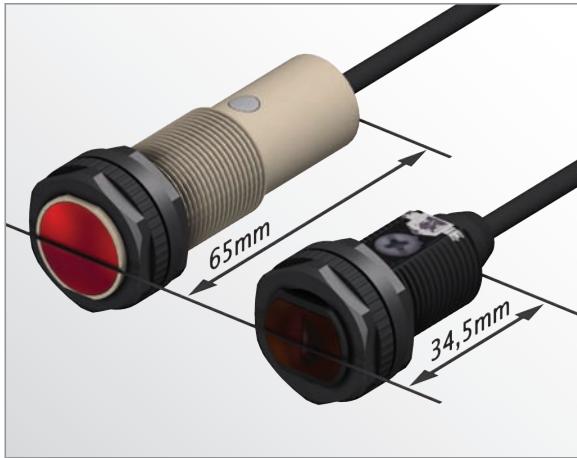


Compact size and shape. Can be installed almost anywhere.

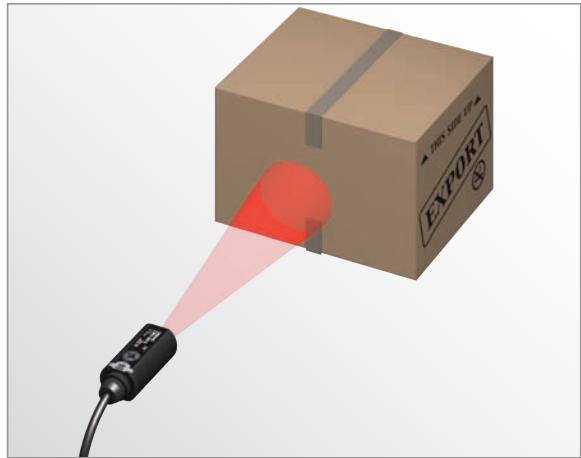

Visible LED light for easy alignment.



Bright LED indicators for the easy operational status checking.

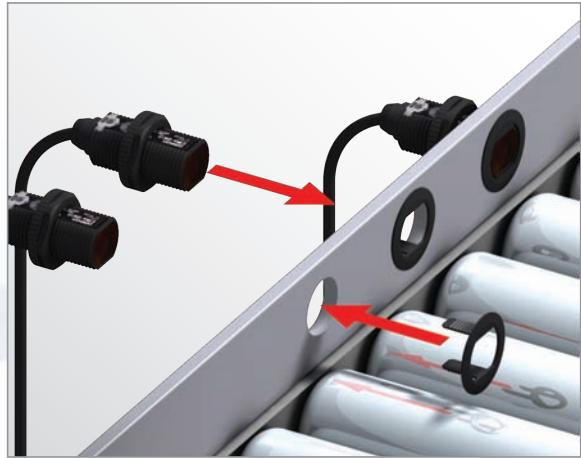

Flush mounting option for smooth installation.

## One family for all

Typically installed in industrial plants ranging from food and beverage, textiles, ceramics and brick production, through to logistics, there's always an E3FA model to fit your application. This extensive photoelectric sensor series with high reliability and enhanced performance includes through-beam, retro-reflective and diffuse reflective types in straight and radial versions. Straight versions are also available with background-suppression, limited-reflective detection, and transparent object detection types for special applications.

All models are available in plastic and metal housing.



### E3FA Standard Series

Omron's well-known quality is built into this series, which exceeds market standards in terms of reliability and solves a wide range of applications in various industries.



Through-beam	20 m
Retro-reflective with MSR function	0.1 to 4 m with E39-R1S

Coaxial Retro-reflective with MSR function	0 to 500 mm with E39-R1S

Diffuse-reflective	100 mm
	300 mm
	1 m

### E3RA Standard Series

E3RA provides a full line-up of radial types that increases mounting flexibility to match specific requirements.




Through-beam	15 m
Retro-reflective with MSR function	0.1 to 3 m with E39-R1S
Diffuse-reflective	100 mm
	300 mm
	700 mm


## Application specific models



Limited-reflective types suitable for detecting transparent film to shiny, mirror film.

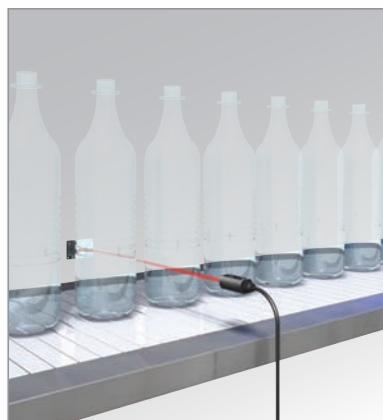

Transparent object detection types utilising Omron's unique technology for detecting objects with birefringent (double refraction) properties.


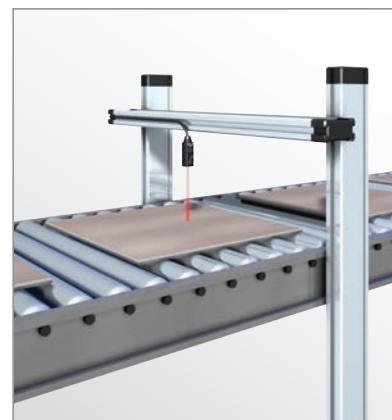


Background suppression types for the stable detection of different objects with various colours.

## E3FA Special Models

The E3FA series includes special models to solve demanding applications, for example, in the food and packaging industry. This includes the detection of transparent or structured objects.



BGS (background suppression)	 	 
Limited distance reflective		 10 to 50 mm
Transparent detection with P-opaque function		 100 to 500 mm with E39-RP1
Transparent detection with P-opaque function		 0.1 to 2 m with E39-RP1

## Non-stop detection


Especially designed for machines that never stop, the rugged E3FA series offers completely reliable sensing in a robust and waterproof housing that can withstand even high-pressure cleaning. Exceeding market standards, this series also has high EMC protection and light immunity. In addition, there is the added benefit of the high-power LED, which contributes to high sensing stability even in environments with dust or vibrations.



High power LED to compensate for dirt and misalignment.



Pulse synchronisation for high ambient light immunity.

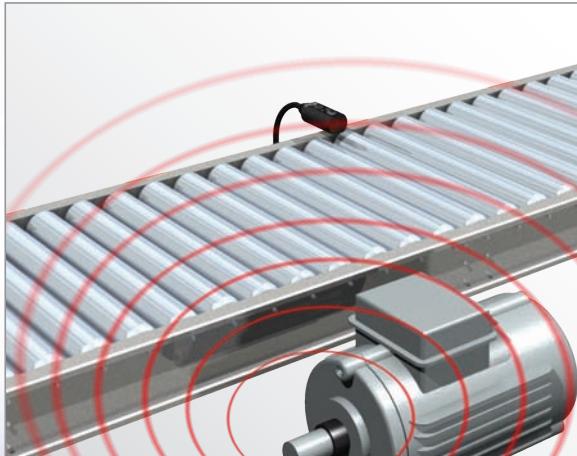

Intensive shielding for high electromagnetic noise immunity.



Tight housing construction for high-level water protection.

## Ordering Information



## Sensors (E3FA Plastic housing) [Refer to Dimensions on page 21.]

Red light  
 Infrared light

Sensor type	Sensing distance	Connection method	Model	
			NPN output	PNP output
Through-beam *1.	20 m	pre-wired	set E3FA-TN11 2M Emitter E3FA-TN11-L 2M Receiver E3FA-TN11-D 2M	set E3FA-TP11 2M Emitter E3FA-TP11-L 2M Receiver E3FA-TP11-D 2M
		M12 connector	set E3FA-TN21 Emitter E3FA-TN21-L Receiver E3FA-TN21-D	set E3FA-TP21 Emitter E3FA-TP21-L Receiver E3FA-TP21-D
	15 m	pre-wired	set E3FA-TN12 2M Emitter E3FA-TN12-L 2M Receiver E3FA-TN12-D 2M	set E3FA-TP12 2M Emitter E3FA-TP12-L 2M Receiver E3FA-TP12-D 2M
		M12 connector	set E3FA-TN22 Emitter E3FA-TN22-L Receiver E3FA-TN22-D	set E3FA-TP22 Emitter E3FA-TP22-L Receiver E3FA-TP22-D
Retro-reflective with MSR function *2.	0.1 to 4 m with E39-R1S	pre-wired	E3FA-RN11 2M	E3FA-RP11 2M
		M12 connector	E3FA-RN21	E3FA-RP21
Coaxial Retro-reflective with MSR function *2.	0 to 500 mm with E39-R1S	pre-wired	E3FA-RN12 2M	E3FA-RP12 2M
		M12 connector	E3FA-RN22	E3FA-RP22
Diffuse-reflective	100 mm	pre-wired	E3FA-DN11 2M	E3FA-DP11 2M
		M12 connector	E3FA-DN21	E3FA-DP21
	300 mm	pre-wired	E3FA-DN12 2M	E3FA-DP12 2M
		M12 connector	E3FA-DN22	E3FA-DP22
	1 m	pre-wired	E3FA-DN13 2M	E3FA-DP13 2M
		M12 connector	E3FA-DN23	E3FA-DP23
	100 mm	pre-wired	E3FA-DN14 2M	E3FA-DP14 2M
		M12 connector	E3FA-DN24	E3FA-DP24
	300 mm	pre-wired	E3FA-DN15 2M	E3FA-DP15 2M
		M12 connector	E3FA-DN25	E3FA-DP25
	1 m	pre-wired	E3FA-DN16 2M	E3FA-DP16 2M
		M12 connector	E3FA-DN26	E3FA-DP26
BGS (background suppression)	100 mm	pre-wired	E3FA-LN11 2M	E3FA-LP11 2M
		M12 connector	E3FA-LN21	E3FA-LP21
	200 mm	pre-wired	E3FA-LN12 2M	E3FA-LP12 2M
		M12 connector	E3FA-LN22	E3FA-LP22
Limited distance reflective	10 to 50 mm	pre-wired	E3FA-VN11 2M	E3FA-VP11 2M
		M12 connector	E3FA-VN21	E3FA-VP21
Transparent detected with P-opaque function *2.	100 to 500 mm with E39-RP1	pre-wired	E3FA-BN11 2M	E3FA-BP11 2M
		M12 connector	E3FA-BN21	E3FA-BP21
Transparent detected with P-opaque function *2.	0.1 to 2 m with E39-RP1	pre-wired	E3FA-BN12 2M	E3FA-BP12 2M
		M12 connector	E3FA-BN22	E3FA-BP22

\*1. The set type includes the emitter and receiver.

\*2. The Reflector is sold separately. Select the Reflector model most suited to the application.

# E3FA/E3RA/E3FB/E3RB



## Sensors (E3RA Plastic housing) [Refer to Dimensions on page 21.]

Red light











Sensor type	Sensing distance	Connection method	Model	
			NPN output	PNP output
Through-beam *1.	15 m	pre-wired	<b>set E3RA-TN11 2M</b> Emitter E3RA-TN11-L 2M Receiver E3RA-TN11-D 2M	<b>set E3RA-TP11 2M</b> Emitter E3RA-TP11-L 2M Receiver E3RA-TP11-D 2M
		M12 connector	<b>set E3RA-TN21</b> Emitter E3RA-TN21-L Receiver E3RA-TN21-D	<b>set E3RA-TP21</b> Emitter E3RA-TP21-L Receiver E3RA-TP21-D
Retro-reflective with MSR function *2.	0.1 to 3 m with E39-R1S	pre-wired	<b>E3RA-RN11 2M</b>	<b>E3RA-RP11 2M</b>
		M12 connector	<b>E3RA-RN21</b>	<b>E3RA-RP21</b>
Diffuse-reflective	100 mm	pre-wired	<b>E3RA-DN11 2M</b>	<b>E3RA-DP11 2M</b>
		M12 connector	<b>E3RA-DN21</b>	<b>E3RA-DP21</b>
	300 mm	pre-wired	<b>E3RA-DN12 2M</b>	<b>E3RA-DP12 2M</b>
		M12 connector	<b>E3RA-DN22</b>	<b>E3RA-DP22</b>
	700 mm	pre-wired	<b>E3RA-DN13 2M</b>	<b>E3RA-DP13 2M</b>
		M12 connector	<b>E3RA-DN23</b>	<b>E3RA-DP23</b>

\*1. The set type includes the emitter and receiver.

\*2. The Reflector is sold separately. Select the Reflector model most suited to the application.


**Sensors (E3FB/E3RB Metal housing) [Refer to Dimensions on page 22.]**

Red light

Sensor type	Sensing distance	Connection method	Model	
			NPN output	PNP output
Through-beam *1.  	20 m  	pre-wired	set E3FB-TN11 2M Emitter E3FB-TN11-L 2M Receiver E3FB-TN11-D 2M	set E3FB-TP11 2M Emitter E3FB-TP11-L 2M Receiver E3FB-TP11-D 2M
		M12 connector	set E3FB-TN21 Emitter E3FB-TN21-L Receiver E3FB-TN21-D	set E3FB-TP21 Emitter E3FB-TP21-L Receiver E3FB-TP21-D
Retro-reflective with MSR function *2.  	0.1 to 4 m with E39-R1S  	pre-wired	E3FB-RN11 2M	E3FB-RP11 2M
		M12 connector	E3FB-RN21	E3FB-RP21
Coaxial Retro-reflective with MSR function *2.  	0 to 500 mm with E39-R1S  	pre-wired	E3FB-RN12 2M	E3FB-RP12 2M
		M12 connector	E3FB-RN22	E3FB-RP22
Diffuse-reflective  	100 mm  	pre-wired	E3FB-DN11 2M	E3FB-DP11 2M
	M12 connector	E3FB-DN21	E3FB-DP21	
	300 mm  	pre-wired	E3FB-DN12 2M	E3FB-DP12 2M
	M12 connector	E3FB-DN22	E3FB-DP22	
	1 m  	pre-wired	E3FB-DN13 2M	E3FB-DP13 2M
	M12 connector	E3FB-DN23	E3FB-DP23	
BGS (background suppression)  	100 mm  	pre-wired	E3FB-LN11 2M	E3FB-LP11 2M
	M12 connector	E3FB-LN21	E3FB-LP21	
	200 mm  	pre-wired	E3FB-LN12 2M	E3FB-LP12 2M
	M12 connector	E3FB-LN22	E3FB-LP22	
Limited distance reflective  	10 to 50 mm  	pre-wired	E3FB-VN11 2M	E3FB-VP11 2M
		M12 connector	E3FB-VN21	E3FB-VP21
Transparent detected with P-opaque function *2.  	100 to 500 mm with E39-RP1  	pre-wired	E3FB-BN11 2M	E3FB-BP11 2M
		M12 connector	E3FB-BN21	E3FB-BP21
Transparent detected with P-opaque function *2.  	0.1 to 2 m with E39-RP1  	pre-wired	E3FB-BN12 2M	E3FB-BP12 2M
		M12 connector	E3FB-BN22	E3FB-BP22
Through-beam *1.  	15 m  	pre-wired	set E3RB-TN11 2M Emitter E3RB-TN11-L 2M Receiver E3RB-TN11-D 2M	set E3RB-TP11 2M Emitter E3RB-TP11-L 2M Receiver E3RB-TP11-D 2M
		M12 connector	set E3RB-TN21 Emitter E3RB-TN21-L Receiver E3RB-TN21-D	set E3RB-TP21 Emitter E3RB-TP21-L Receiver E3RB-TP21-D
Retro-reflective with MSR function *2.  	0.1 to 3 m with E39-R1S  	pre-wired	E3RB-RN11 2M	E3RB-RP11 2M
		M12 connector	E3RB-RN21	E3RB-RP21
Diffuse-reflective  	100 mm  	pre-wired	E3RB-DN11 2M	E3RB-DP11 2M
	M12 connector	E3RB-DN21	E3RB-DP21	
	300 mm  	pre-wired	E3RB-DN12 2M	E3RB-DP12 2M
	M12 connector	E3RB-DN22	E3RB-DP22	
	700 mm  	pre-wired	E3RB-DN13 2M	E3RB-DP13 2M
	M12 connector	E3RB-DN23	E3RB-DP23	

\*1. The set type includes the emitter and receiver.

\*2. The Reflector is sold separately. Select the Reflector model most suited to the application.

# E3FA/E3RA/E3FB/E3RB


## Reflectors [Refer to Dimensions on page 23.]

Reflectors required for Retro-reflective Sensors: A Reflector is not provided with the Sensor. Be sure to order a Reflector separately.

Sensor	Sensing distance	Appearance	Model	Quantity	Remarks
E3FA-R□1 E3FB-R□1	0.1 to 4 m		E39-R1S	1	for E3FA-R□, E3RA-R□, E3FB-R□ and E3RB-R□
E3FA-R□2 E3FB-R□2	0 to 500 mm				
E3FA-B□1 E3FB-B□1	100 to 500 mm		E39-RP1	1	for E3FA-B□ and E3FB-B□
E3FA-B□2 E3FB-B□2	0.1 to 2 m				

## Mounting brackets [Refer to Dimensions on page 23.]

A Mounting Bracket is not enclosed with the Sensor. Order a Mounting Bracket separately if required.

Sensor	Appearance	Model (Material)	Quantity	Remarks
all types		E39-L183 (SUS304)	1	Mounting bracket
E3FA-□ E3RA-□		E39-L182 (POM)	1	Flush mounting bracket

## Sensor I/O connectors

Models for Connectors: A Connector is not provided with the Sensor. Be sure to order a Connector separately.

Sensor	Size	Cable	Appearance	Cable type	Model
M12 connector types	M12	Standard	Straight	2 m	XS2F-M12PVC4S2M
				5 m	XS2F-M12PVC4S5M
			Angle	2 m	XS2F-M12PVC4A2M
				5 m	XS2F-M12PVC4A5M

## Model Number Legend

**E3□-□□□□□-(□)□**

1 2 3 4 5 6 7

### 1. Series name

FA: Cylindrical, Straight type, Plastic housing  
RA: Cylindrical, Radial type, Plastic housing  
FB: Cylindrical, Straight type, Metal housing  
RB: Cylindrical, Radial type, Metal housing

### 2. Sensing method

T: Through-beam  
R: Retro-reflective with MSR function  
D: Diffuse-reflective  
L: Background suppression  
V: Limited distance reflective  
B: Transparent detected with P-opaquing function

### 3. Output

P: PNP  
N: NPN

### 4. Connection

1: Cable  
2: Connector, M12, 4-pin

### 5. Difference of sensing distance, difference of light source

Sequential number

### 6. Emitter/Receiver

D: Receiver  
L: Emitter

### 7. Cable length

Blank: Connector type

e.g., E3FA-TP11 2M;

Cylindrical, Straight type, Plastic housing/ Through-beam/ PNP/ Cable/ Difference of Sensing distance/ Cable length of 2M

**E3RA-TN21-D;**

Cylindrical, Radial type, Plastic housing/ Through-beam/ NPN/ Connector, M12, 4-pin/ Difference of Sensing distance/ Receiver/ Connector type

**E3FA-VP21;**

Cylindrical, Straight type, Plastic housing/ Limited distance reflective/ PNP/ Connector, M12, 4-pin/ Difference of Sensing distance/ Connector type

## Ratings and Specifications

### Straight type (E3FA/E3FB)


Model	Sensing method		Through-beam		Retro-reflective with MSR function	Coaxial Retro-reflective with MSR function	
	NPN output	Pre-wired M12 Connector	E3F□-TN11 2M E3F□-TN21	E3FA-TN12 2M E3FA-TN22	E3F□-RN11 2M E3F□-RN21	E3F□-RN12 2M E3F□-RN22	
Item	PNP output	Pre-wired M12 Connector	E3F□-TP11 2M E3F□-TP21	E3FA-TP12 2M E3FA-TP22	E3F□-RP11 2M E3F□-RP21	E3F□-RP12 2M E3F□-RP22	
<b>Sensing distance</b>		20 m	15 m	0.1 to 4 m (with E39-R1S)	0 to 500 mm (with E39-R1S)		
<b>Spot diameter (reference value)</b>		—			—		
<b>Standard sensing object</b>		Opaque: 7 mm dia.min.			Opaque: 75 mm dia.min.		
<b>Differential travel</b>		—			—		
<b>Directional angle</b>		2° min.			—		
<b>Light source (wavelength)</b>		Red LED (624 nm)	Infrared LED (850 nm)	Red LED (624 nm)	—		
<b>Power supply voltage</b>		10 to 30 VDC (include voltage ripple of 10%(p-p) max.)			—		
<b>Current consumption</b>		40 mA max. (Emitter 25 mA max. Receiver 15 mA max.)			25 mA max.		
<b>Control output</b>		NPN/PNP (open collector) Load current: 100 mA max. (Residual voltage: 3 V max.), Load power supply voltage: 30 VDC max.			—		
<b>Operation mode</b>		Light-ON/Dark-ON selectable by wiring			—		
<b>Indicator</b>		Operation indicator (orange) Stability indicator (green) Power indicator (green): only Emitter of Through-beam			—		
<b>Protection circuits</b>		Power supply reverse polarity protection, Output short-circuit protection, and Output reverse polarity protection			—		
<b>Response time</b>		0.5 ms			—		
<b>Sensitivity adjustment</b>		One-turn adjuster			—		
<b>Ambient illumination (Receiver side)</b>		Incandescent lamp: 3,000 lx max./ Sunlight: 10,000 lx max.			—		
<b>Ambient temperature range</b>		Pre-wired Models Operating: -25 to 55°C/ Storage: -40 to 70°C (with no icing or condensation) M12 Connector Models Operating: -40 to 55°C/ Storage: -40 to 70°C (with no icing or condensation)			—		
<b>Ambient humidity range</b>		Operating: 35 to 85%/ Storage: 35 to 95% (with no condensation)			—		
<b>Insulation resistance</b>		20 MΩ min. at 500 VDC			—		
<b>Dielectric strength</b>		1,000 VAC at 50/60 Hz for 1 min. between current-carrying parts and case			—		
<b>Vibration resistance</b>		Destruction: 10 to 55 Hz, 1.5 mm double amplitude for 2 hours each in X, Y and Z directions			—		
<b>Shock resistance</b>		Destruction: 500 m/s <sup>2</sup> 3 times each in X, Y and Z directions			—		
<b>Degree of protection</b>		IEC: IP67, DIN 40050-9: IP69K *			—		
<b>Weight (packed state/only sensor)</b>	<b>Pre-wired cable (2M)</b>		E3FA: Approx. 110 g/ Approx. 50 g, respectively, E3FB: Approx. 175 g/ Approx. 65 g, respectively		E3FA: Approx. 60 g/ Approx. 50 g, E3FB: Approx. 95 g/ Approx. 65 g		
	<b>Connector</b>		E3FA: Approx. 30 g/ Approx. 10 g, respectively, E3FB: Approx. 85 g/ Approx. 20 g, respectively		E3FA: Approx. 20 g/ Approx. 10 g, E3FB: Approx. 50 g/ Approx. 20 g		
<b>Material</b>	<b>Case</b>		E3FA: ABS, E3FB: Nickel-brass			—	
	<b>Lens and Display</b>		PMMA			—	
	<b>Adjuster</b>		POM			—	
	<b>Nut</b>		E3FA: POM, E3FB: Nickel-brass			—	
<b>Accessories</b>		Instruction sheet M18 nuts (4 pcs)		Instruction sheet M18 nuts (2 pcs)		—	

\* IP69K Degree of Protection Specifications

IP69K is a protection specification stipulated by DIN 40050 Part 9 of the German standards.

The test item is sprayed with 80°C water from a nozzle of a specified shape at a water pressure of 80 to 100 bar. The amount of water is 14 to 16 liters per minute.

The distance between the test item and the nozzle is 10 to 15 cm. The water is discharged at angles of 0°, 30°, 60°, and 90° from the horizontal plane for 30 seconds at each angle while the test item is rotated horizontally.



# E3FA/E3RA/E3FB/E3RB

## Straight type (E3FA/E3FB)


Model	Sensing method		Diffuse-reflective									
	NPN output	Pre-wired	E3F□-DN11 2M	E3F□-DN12 2M	E3F□-DN13 2M	E3FA-DN14 2M	E3FA-DN15 2M	E3FA-DN16 2M				
Item	PNP output	Pre-wired	E3F□-DP11 2M	E3F□-DP12 2M	E3F□-DP13 2M	E3FA-DP14 2M	E3FA-DP15 2M	E3FA-DP16 2M				
	M12 Connector	E3F□-DP21	E3F□-DP22	E3F□-DP23	E3FA-DP24	E3FA-DP25	E3FA-DP26					
<b>Sensing distance</b>		100 mm (white paper: 300 × 300 mm)	300 mm (white paper: 300 × 300 mm)	1 m (white paper: 300 × 300 mm)	100 mm (white paper: 300 × 300 mm)	300 mm (white paper: 300 × 300 mm)	1 m (white paper: 300 × 300 mm)					
<b>Spot diameter (reference value)</b>		40 × 45 mm Sensing distance of 100 mm	40 × 50 mm Sensing distance of 300 mm	120 × 150 mm Sensing distance of 1 m	40 × 45 mm Sensing distance of 100 mm	40 × 50 mm Sensing distance of 300 mm	120 × 150 mm Sensing distance of 1 m					
<b>Standard sensing object</b>		—										
<b>Differential travel</b>		20% max.										
<b>Directional angle</b>		—										
<b>Light source (wavelength)</b>		Red LED (624 nm)			Infrared LED (850 nm)							
<b>Power supply voltage</b>		10 to 30 VDC (include voltage ripple of 10%(p-p) max.)										
<b>Current consumption</b>		25 mA max.										
<b>Control output</b>		NPN/PNP (open collector) Load current: 100 mA max. (Residual voltage: 3 V max.), Load power supply voltage: 30 VDC max.										
<b>Operation mode</b>		Light-ON/Dark-ON selectable by wiring										
<b>Indicator</b>		Operation indicator (orange) Stability indicator (green)										
<b>Protection circuits</b>		Power supply reverse polarity protection, Output short-circuit protection, and Output reverse polarity protection										
<b>Response time</b>		0.5 ms										
<b>Sensitivity adjustment</b>		One-turn adjuster										
<b>Ambient illumination (Receiver side)</b>		Incandescent lamp: 3,000 lx max./ Sunlight: 10,000 lx max.										
<b>Ambient temperature range</b>		Pre-wired Models Operating: -25 to 55°C/ Storage: -40 to 70°C (with no icing or condensation) M12 Connector Models Operating: -40 to 55°C/ Storage: -40 to 70°C (with no icing or condensation)										
<b>Ambient humidity range</b>		Operating: 35 to 85%/ Storage: 35 to 95% (with no condensation)										
<b>Insulation resistance</b>		20 MΩ min. at 500 VDC										
<b>Dielectric strength</b>		1,000 VAC at 50/60 Hz for 1 min. between current-carrying parts and case										
<b>Vibration resistance</b>		Destruction: 10 to 55 Hz, 1.5 mm double amplitude for 2 hours each in X, Y and Z directions										
<b>Shock resistance</b>		Destruction: 500 m/s <sup>2</sup> 3 times each in X, Y and Z directions										
<b>Degree of protection</b>		IEC: IP67, DIN 40050-9: IP69K *										
<b>Weight (packed state/only sensor)</b>	<b>Pre-wired cable (2M)</b>	E3FA: Approx. 60 g/ Approx. 50 g, E3FB: Approx. 95 g/ Approx. 65 g										
	<b>Connector</b>	E3FA: Approx. 20 g/ Approx. 10 g, E3FB: Approx. 50 g/ Approx. 20 g										
<b>Material</b>	<b>Case</b>	E3FA: ABS, E3FB: Nickel-brass										
	<b>Lens and Display</b>	PMMA										
	<b>Adjuster</b>	POM										
	<b>Nut</b>	E3FA: POM, E3FB: Nickel-brass										
<b>Accessories</b>		Instruction sheet M18 nuts (2 pcs)										

\* IP69K Degree of Protection Specifications

IP69K is a protection specification stipulated by DIN 40050 Part 9 of the German standards.

The test item is sprayed with 80°C water from a nozzle of a specified shape at a water pressure of 80 to 100 bar. The amount of water is 14 to 16 liters per minute.

The distance between the test item and the nozzle is 10 to 15 cm. The water is discharged at angles of 0°, 30°, 60°, and 90° from the horizontal plane for 30 seconds at each angle while the test item is rotated horizontally.



## Straight type (E3FA/E3FB)


Model	Sensing method		BGS (Background suppression)		Limited distance reflective	Transparent detected with P-opaquing function									
	NPN output	Pre-wired M12 Connector	E3F□-LN11 2M	E3F□-LN12 2M	E3F□-VN11 2M	E3F□-BN11 2M	E3F□-BN12 2M								
Item	PNP output	Pre-wired M12 Connector	E3F□-LN21	E3F□-LN22	E3F□-VN21	E3F□-BN21	E3F□-BN22								
			E3F□-LP11 2M	E3F□-LP12 2M	E3F□-VP11 2M	E3F□-BP11 2M	E3F□-BP12 2M								
<b>Sensing distance</b>		100 mm (white paper: 300 × 300 mm)	200 mm (white paper: 300 × 300 mm)	10 to 50 mm (glass(t = 1.0 mm): 150 × 150 mm)	100 to 500 mm (with E39-RP1)	0.1 to 2 m (with E39-RP1)									
<b>Spot diameter (reference value)</b>		10 × 10 mm Sensing distance of 100 mm	10 × 15 mm Sensing distance of 200 mm	10 × 10 mm Sensing distance of 50 mm	—										
<b>Standard sensing object</b>		—		glass(t = 1.0 mm): 150 × 150 mm											
<b>Differential travel</b>		20% max.		—											
<b>Directional angle</b>		—													
<b>Light source (wavelength)</b>		Red LED (624 nm)													
<b>Power supply voltage</b>		10 to 30 VDC (include voltage ripple of 10%(p-p) max.)													
<b>Current consumption</b>		25 mA max.													
<b>Control output</b>		NPN/PNP (open collector) Load current: 100 mA max. (Residual voltage: 3 V max.), Load power supply voltage: 30 VDC max.													
<b>Operation mode</b>		Light-ON/Dark-ON selectable by wiring													
<b>Indicator</b>		Operation indicator (orange) Stability indicator (green)													
<b>Protection circuits</b>		Power supply reverse polarity protection, Output short-circuit protection, and Output reverse polarity protection													
<b>Response time</b>		0.5 ms													
<b>Sensitivity adjustment</b>		Fixed		One-turn adjuster											
<b>Ambient illumination (Receiver side)</b>		Incandescent lamp: 3,000 lx max./ Sunlight: 10,000 lx max.													
<b>Ambient temperature range</b>		Pre-wired Models Operating: -25 to 55°C/ Storage: -40 to 70°C (with no icing or condensation) M12 Connector Models Operating: -40 to 55°C/ Storage: -40 to 70°C (with no icing or condensation)													
<b>Ambient humidity range</b>		Operating: 35 to 85%/ Storage: 35 to 95% (with no condensation)													
<b>Insulation resistance</b>		20 MΩ min. at 500 VDC													
<b>Dielectric strength</b>		1,000 VAC at 50/60 Hz for 1 min. between current-carrying parts and case													
<b>Vibration resistance</b>		Destruction: 10 to 55 Hz, 1.5 mm double amplitude for 2 hours each in X, Y and Z directions													
<b>Shock resistance</b>		Destruction: 500 m/s <sup>2</sup> 3 times each in X, Y and Z directions													
<b>Degree of protection</b>		IEC: IP67, DIN 40050-9: IP69K *													
<b>Weight (packed state/only sensor)</b>	<b>Pre-wired cable (2M)</b>		E3FA: Approx. 60 g/ Approx. 50 g, E3FB: Approx. 95 g/ Approx. 65 g												
	<b>Connector</b>		E3FA: Approx. 20 g/ Approx. 10 g, E3FB: Approx. 50 g/ Approx. 20 g												
<b>Material</b>	<b>Case</b>		E3FA: ABS, E3FB: Nickel-brass												
	<b>Lens and Display</b>		PMMA												
	<b>Adjuster</b>		POM												
	<b>Nut</b>		E3FA: POM, E3FB: Nickel-brass												
<b>Accessories</b>		Instruction sheet M18 nuts (2 pcs)													

\* IP69K Degree of Protection Specifications

IP69K is a protection specification stipulated by DIN 40050 Part 9 of the German standards.

The test item is sprayed with 80°C water from a nozzle of a specified shape at a water pressure of 80 to 100 bar. The amount of water is 14 to 16 liters per minute.

The distance between the test item and the nozzle is 10 to 15 cm. The water is discharged at angles of 0°, 30°, 60°, and 90° from the horizontal plane for 30 seconds at each angle while the test item is rotated horizontally.



# E3FA/E3RA/E3FB/E3RB

## Radial type (E3RA/E3RB)


Model	Sensing method		Through-beam	Retro-reflective with MSR function	Diffuse-reflective							
	NPN output	Pre-wired M12 Connector	E3R□-TN11 2M E3R□-TN21	E3R□-RN11 2M E3R□-RN21	E3R□-DN11 2M E3R□-DN21	E3R□-DN12 2M E3R□-DN22	E3R□-DN13 2M E3R□-DN23					
Item	PNP output	Pre-wired M12 Connector	E3R□-TP11 2M E3R□-TP21	E3R□-RP11 2M E3R□-RP21	E3R□-DP11 2M E3R□-DP21	E3R□-DP12 2M E3R□-DP22	E3R□-DP13 2M E3R□-DP23					
<b>Sensing distance</b>		15 m	0.1 to 3 m (with E39-R1S)	100 mm (white paper: 300 × 300 mm)	300 mm (white paper: 300 × 300 mm)	700 mm (white paper: 300 × 300 mm)						
<b>Spot diameter (reference value)</b>		—	—	35 × 40 mm Sensing distance of 100 mm	40 × 45 mm Sensing distance of 300 mm	90 × 120 mm Sensing distance of 700 mm						
<b>Standard sensing object</b>		Opaque: 7 mm dia.min.	Opaque: 75 mm dia.min.	—	—	—						
<b>Differential travel</b>		—	—	20% max.	—	—						
<b>Directional angle</b>		2° min.	—	—	—	—						
<b>Light source (wavelength)</b>		Red LED (624 nm)	—	—	—	—						
<b>Power supply voltage</b>		10 to 30 VDC (include voltage ripple of 10%(p-p) max.)	—	—	—	—						
<b>Current consumption</b>		40mA max. (Emitter 25 mA max. Receiver 15 mA max.)	25 mA max.	—	—	—						
<b>Control output</b>		NPN/PNP (open collector) Load current: 100 mA max. (Residual voltage: 2 V max.), Load power supply voltage: 30 VDC max.										
<b>Operation mode</b>		Light-ON/Dark-ON selectable by wiring										
<b>Indicator</b>		Operation indicator (orange) Stability indicator (green) Power indicator (green): only Emitter of Through-beam										
<b>Protection circuits</b>		Power supply reverse polarity protection, Output short-circuit protection, and Output reverse polarity protection										
<b>Response time</b>		0.5 ms										
<b>Sensitivity adjustment</b>		One-turn adjuster										
<b>Ambient illumination (Receiver side)</b>		Incandescent lamp: 3,000 lx max./ Sunlight: 10,000 lx max.										
<b>Ambient temperature range</b>		Pre-wired Models Operating: -25 to 55°C/ Storage: -40 to 70°C (with no icing or condensation) M12 Connector Models Operating: -40 to 55°C/ Storage: -40 to 70°C (with no icing or condensation)										
<b>Ambient humidity range</b>		Operating: 35 to 85%/ Storage: 35 to 95% (with no condensation)										
<b>Insulation resistance</b>		20 MΩ min. at 500 VDC										
<b>Dielectric strength</b>		1,000 VAC at 50/60 Hz for 1 min. between current-carrying parts and case										
<b>Vibration resistance</b>		Destruction: 10 to 55 Hz, 1.5 mm double amplitude for 2 hours each in X, Y and Z directions										
<b>Shock resistance</b>		Destruction: 500 m/s <sup>2</sup> 3 times each in X, Y and Z directions										
<b>Degree of protection</b>		IEC: IP67, DIN 40050-9: IP69K *										
<b>Weight (packed state/only sensor)</b>	<b>Pre-wired cable (2M)</b>		<b>E3RA:</b> Approx. 110 g/ Approx. 50 g, respectively, <b>E3RB:</b> Approx. 175 g/ Approx. 65 g, respectively	<b>E3RA:</b> Approx. 60 g/ Approx. 50 g, <b>E3RB:</b> Approx. 95 g/ Approx. 65 g								
	<b>Connector</b>		<b>E3RA:</b> Approx. 30 g/ Approx. 10 g, respectively, <b>E3RB:</b> Approx. 85 g/ Approx. 20 g, respectively	<b>E3RA:</b> Approx. 20 g/ Approx. 10 g, <b>E3RB:</b> Approx. 50 g/ Approx. 20 g								
<b>Material</b>	<b>Case</b>		<b>E3RA:</b> ABS, <b>E3RB:</b> Nickel-brass									
	<b>Lens and Display</b>		PMMA									
	<b>Adjuster</b>		POM									
	<b>Nut</b>		<b>E3RA:</b> POM, <b>E3RB:</b> Nickel-brass									
<b>Accessories</b>		Instruction sheet M18 nuts (4 pcs)	Instruction sheet M18 nuts (2 pcs)									

\* IP69K Degree of Protection Specifications

IP69K is a protection specification stipulated by DIN 40050 Part 9 of the German standards.

The test item is sprayed with 80°C water from a nozzle of a specified shape at a water pressure of 80 to 100 bar. The amount of water is 14 to 16 liters per minute.


The distance between the test item and the nozzle is 10 to 15 cm. The water is discharged at angles of 0°, 30°, 60°, and 90° from the horizontal plane for 30 seconds at each angle while the test item is rotated horizontally.



## Engineering Data (Reference Value)


### Parallel Operating Range

Through-beam Models  
E3F□-T□, E3R□-T□

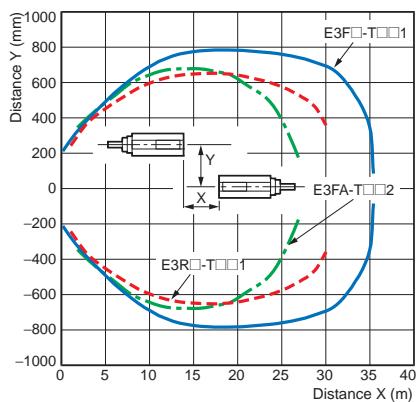


### Transparent detected with P-opaque function

E3F□-B□1

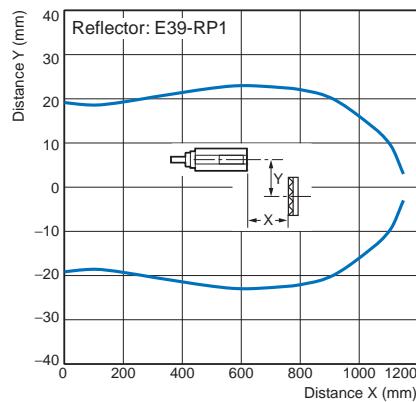


### Retro-reflective Models (with MSR function)

E3F□-R□1, E3R□-R□1

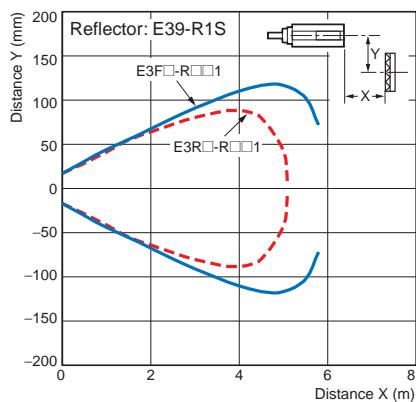


E3F□-R□2

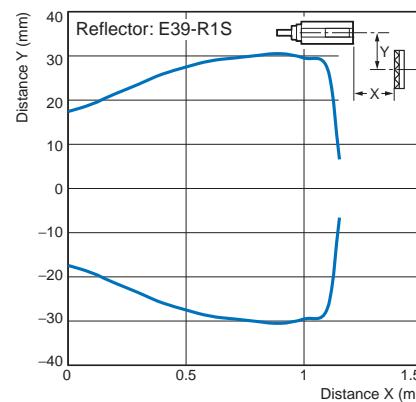


### Operating Range

#### Diffuse-reflective Models


E3F□-D□1, E3F□-D□2  
E3R□-D□1, E3R□-D□2

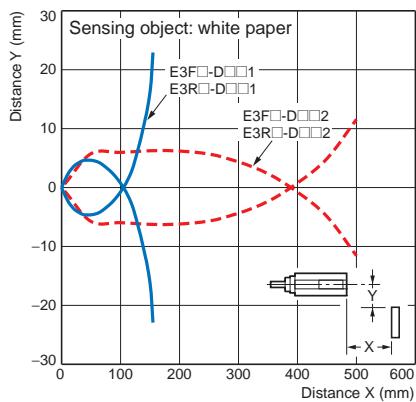


E3FA-D□6

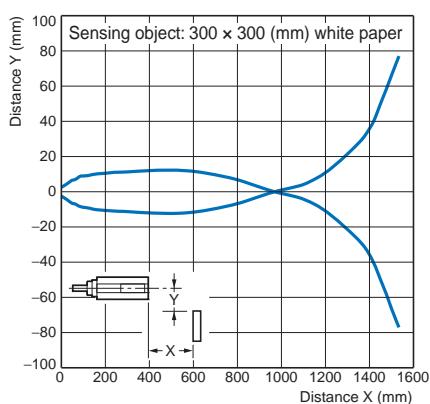

E3F□-D□3, E3R□-D□3

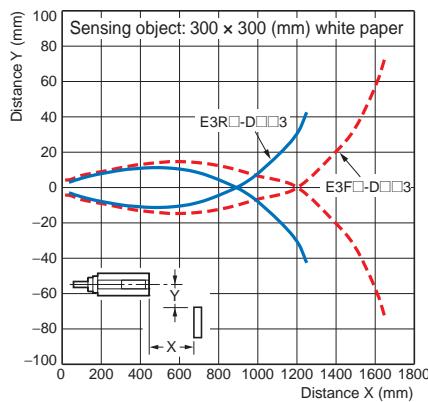


E3FA-D□4, E3FA-D□5

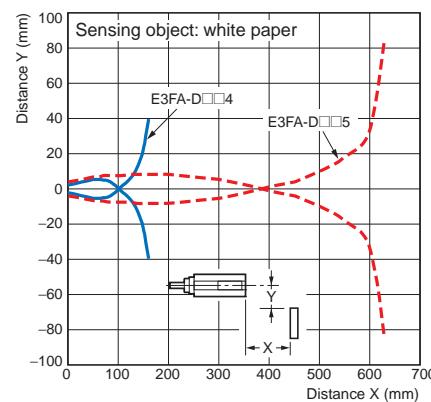


### BGS Models

E3F□-L□1, E3F□-L□2

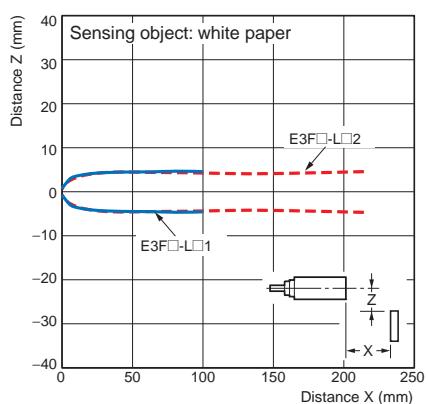

### Limited distance reflective


E3F□-V□

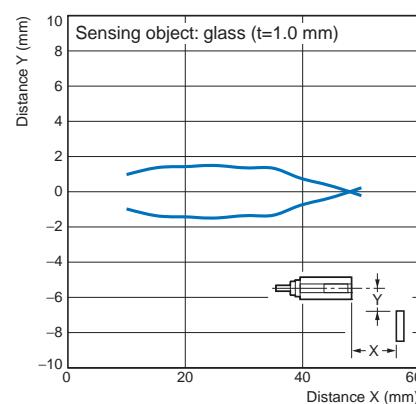


# E3FA/E3RA/E3FB/E3RB

## Excess Gain vs. Distance


### Through-beam Models E3F□-T□, E3R□-T□

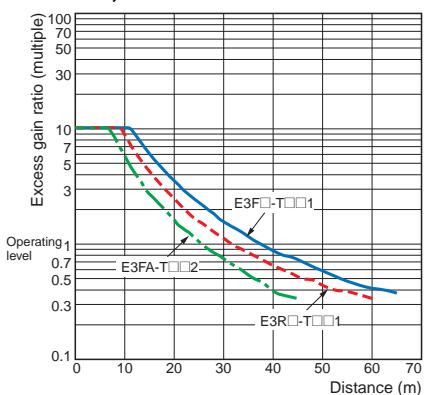

### Retro-reflective Models (with MSR function) E3F□-R□1, E3R□-R□1

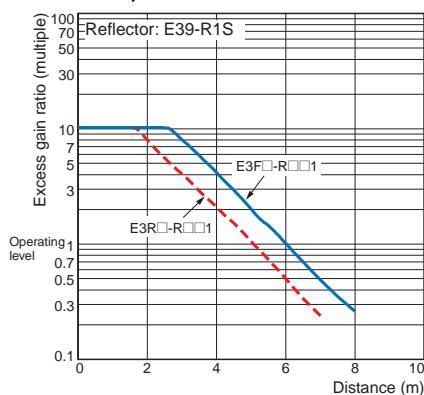


### E3F□-R□2

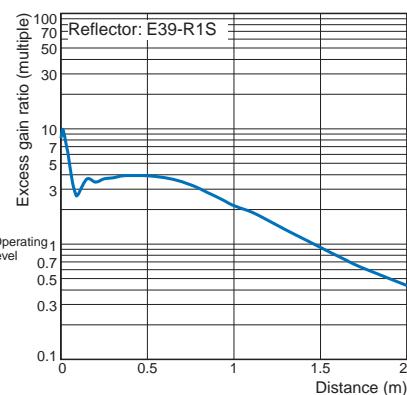


### Diffuse-reflective Models


#### E3F□-D□1, E3F□-D□2 E3R□-D□1, E3R□-D□2

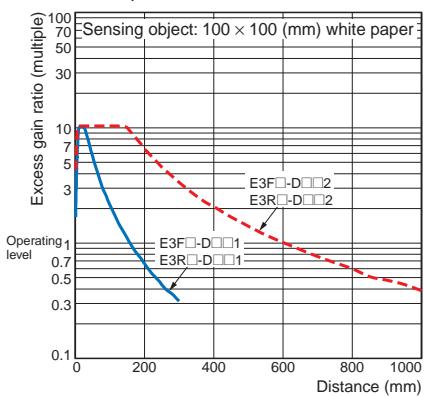


### E3F□-D□3, E3R□-D□3

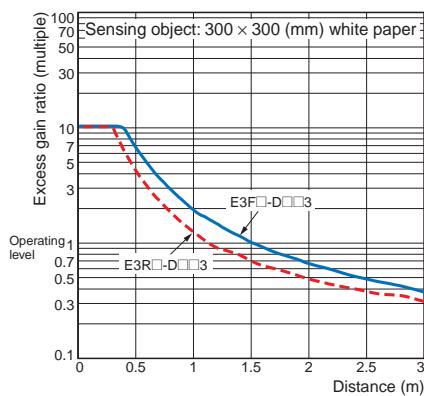


### E3FA-D□4, E3FA-D□5

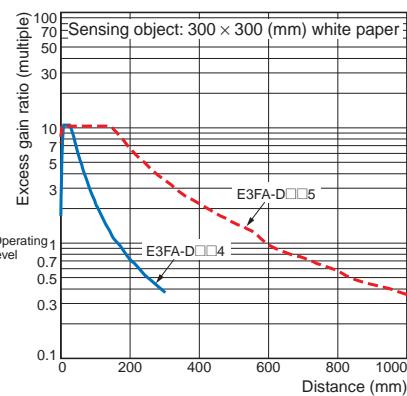

### E3FA-D□6

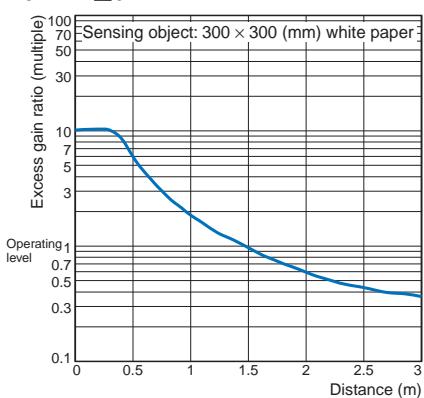










### Transparent detected with P-opaque function E3F□-B□1, E3F□-B□2

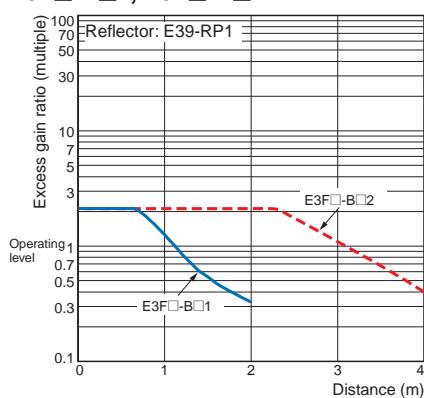

### Limited distance reflective

#### E3F□-V□

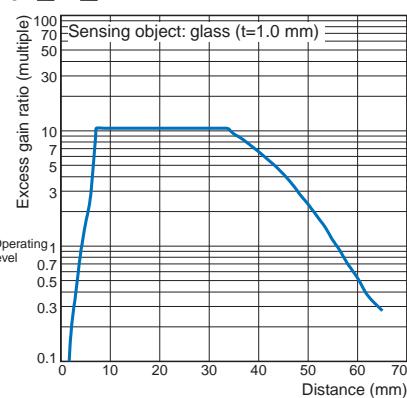

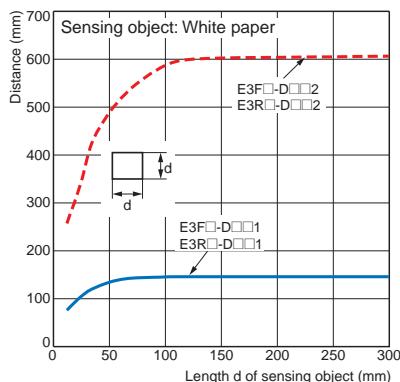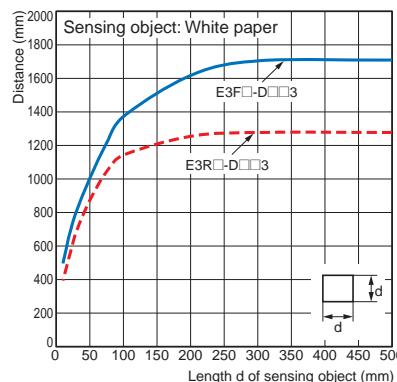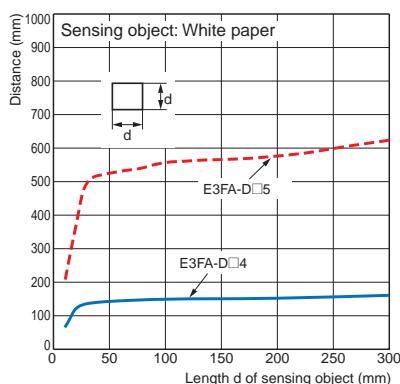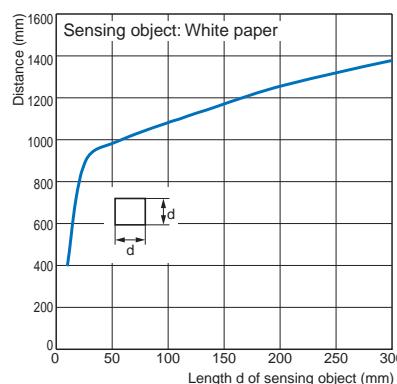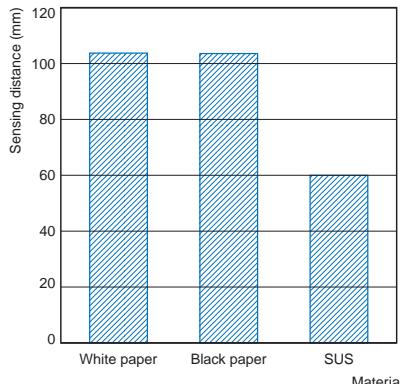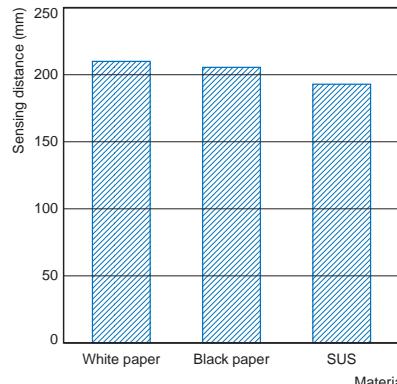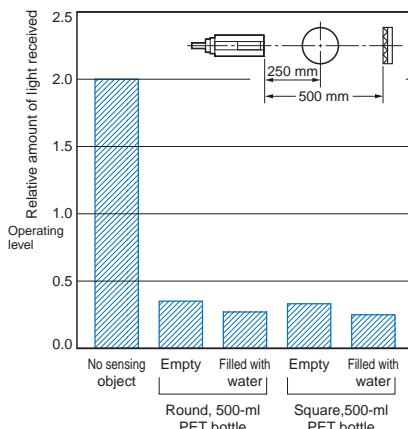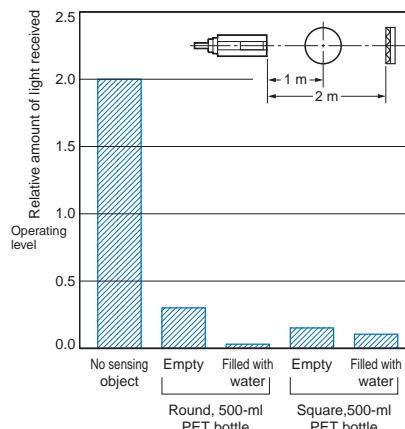
**Sensing Object Size vs. Distance****Diffuse-reflective Models****E3F□-D□1, E3F□-D□2****E3R□-D□1, E3R□-D□2****E3F□-D□3, E3R□-D□3****E3FA-D□4, E3FA-D□5****E3FA-D□6****Sensing Distance vs. Sensing Object Material****BGS Models****E3F□-L□1****E3F□-L□2****Dark Excess Gain vs. Sensing Object Characteristics****Transparent detected with P-opaque function****E3F□-B□1****E3F□-B□2**

# E3FA/E3RA/E3FB/E3RB


## Object Surface Color vs. Sensing Distance

### Diffuse-reflective Models


#### E3FA-D□1

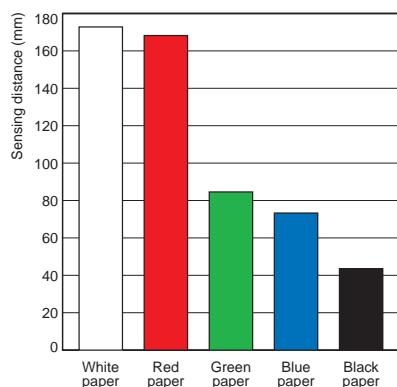


#### E3FA-D□2

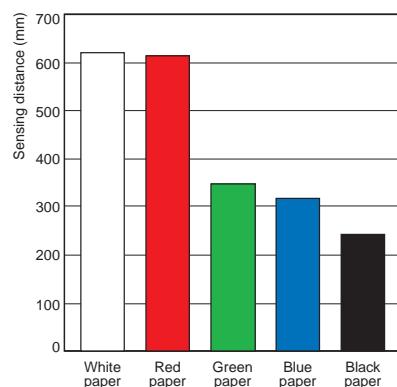


#### E3FA-D□3

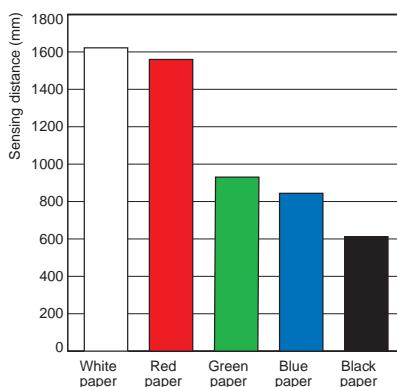


#### E3FA-D□4

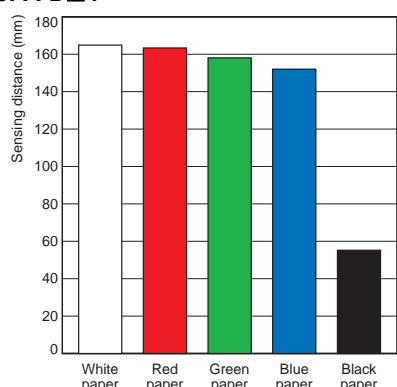

#### E3FA-D□5

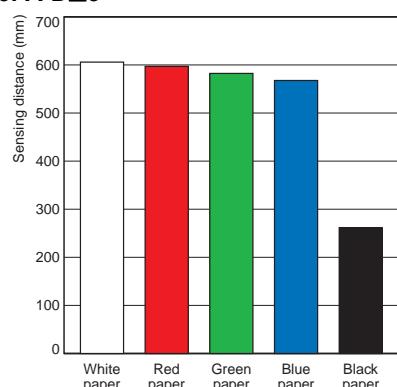

#### E3FA-D□6

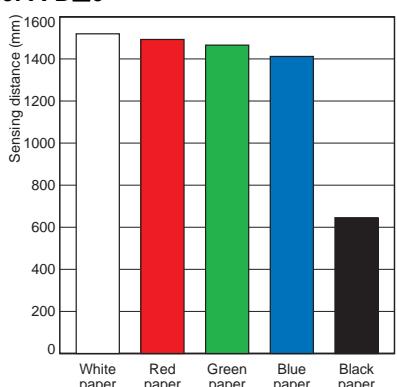

## Output circuit diagram

### PNP Output

Model	Operation mode	Timing charts	Operation selector	Output circuit
E3F□-TP□ E3F□-RP□ E3F□-DP□ E3F□-VP□ E3F□-BP□ E3R□-TP□ E3R□-RP□ E3R□-DP□	Light-ON	Light incident Light interrupted Operation indicator (orange) ON OFF Output transistor ON OFF Load (e.g., relay) Operate Reset (Between blue and black leads)	Connect the pink wire (Pin(2)) to the brown (Pin(1))	Through-beam Receivers, Retro-reflective Models, Diffuse-reflective Models, Limited reflective Models. Transparent detected with P-opaque function.  
	Dark-ON	Light incident Light interrupted Operation indicator (orange) ON OFF Output transistor ON OFF Load (e.g., relay) Operate Reset (Between blue and black leads)	Connect the pink wire (Pin(2)) to the blue (Pin(3)) or open the pink wire (Pin(2))	  
E3F□-LP□	Through-beam Emitter			  
	Light-ON	Operation indicator (orange) NEAR ON OFF Output transistor ON OFF Load (e.g., relay) Operate Reset (Between blue and black leads)	Connect the pink wire (Pin(2)) to the brown (Pin(1))	Background suppression.  
	Dark-ON	Operation indicator (orange) NEAR ON OFF Output transistor ON OFF Load (e.g., relay) Operate Reset (Between blue and black leads)	Connect the pink wire (Pin(2)) to the blue (Pin(3)) or open the pink wire (Pin(2))	  

## NPN Output

Model	Operation mode	Timing charts	Operation selector	Output circuit
E3F□-TN□ E3F□-RN□ E3F□-DN□ E3F□-VN□ E3F□-BN□ E3R□-TN□ E3R□-RN□ E3R□-DN□	Light-ON		Connect the pink wire (Pin(2)) to the brown (Pin(1)) or open the pink wire (Pin(2))	<p>Through-beam Receivers, Retro-reflective Models, Diffuse-reflective Models, Limited reflective Models. Transparent detected with P-opaquing function.</p>
	Dark-ON		Connect the pink wire (Pin(2)) to the blue (Pin(3))	
E3F□-LN□	Light-ON		Connect the pink wire (Pin(2)) to the brown (Pin(1)) or open the pink wire (Pin(2))	<p>Background suppression.</p>
	Dark-ON		Connect the pink wire (Pin(2)) to the blue (Pin(3))	


## Connector Pin Arrangement

## M12 Connector Pin Arrangement



## Connectors (Sensor I/O connectors)

## M12 4-wire Connectors

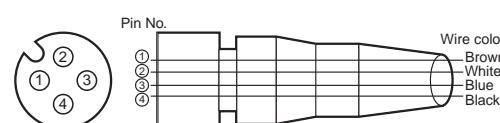

Classification	Wire color	Connector pin No.	Application
DC	Brown	(1)	Power supply (+V)
	White	(2)	L/on · D/on selectable
	Blue	(3)	Power supply (0 V)
	Black	(4)	Output

# E3FA/E3RA/E3FB/E3RB

## Nomenclature

### Straight type, Plastic housing

with an adjuster:

E3FA-T□-D

E3FA-R□

E3FA-D□

E3FA-V□

E3FA-B□

without an adjuster:

E3FA-T□-L \*

E3FA-L□

Stability indicator  
(Green)



Sensitivity adjuster  
Operation indicator  
(Orange)

### Radial type, Plastic housing

with an adjuster:

E3RA-T□-D

E3RA-R□

E3RA-D□

without an adjuster:

E3RA-T□-L \*

Stability indicator  
(Green)



Sensitivity adjuster  
Operation indicator  
(Orange)

\* The Emitter has two Power indicators (Green) instead of the Stability indicator (Green) and the Operation indicator (Orange).

### Straight type, Metal housing

with an adjuster:

E3FB-T□-D

E3FB-R□

E3FB-D□

E3FB-V□

E3FB-B□

without an adjuster:

E3FB-T□-L \*

E3FB-L□

Stability indicator  
(Green)



Sensitivity adjuster  
Operation indicator  
(Orange)

### Radial type, Metal housing

with an adjuster:

E3RB-T□-D

E3RB-R□

E3RB-D□

without an adjuster:

E3RB-T□-L \*

Stability indicator  
(Green)



Sensitivity adjuster  
Operation indicator  
(Orange)

\* The Emitter has two Power indicators (Green) instead of the Stability indicator (Green) and the Operation indicator (Orange).

## Safety Precautions

### Refer to Warranty and Limitations of Liability.

#### **WARNING**

This product is not designed or rated for directly or indirectly ensuring safety of persons. Do not use it for such a purpose.



#### **CAUTION**

Never use the product with an AC power supply.

Do not use the product with voltage in excess of the rated voltage.



Do not use the product with incorrect wiring.

Otherwise, explosion, fire, malfunction may result.



#### **Precautions for Safe Use**

Be sure to follow the safety precautions below for added safety.

1. Do not use the sensor under the environment with explosive, flammable or corrosive gas.
2. Do not use the sensor under the oil or chemical environment.
3. Do not use the sensor in the water, rain or outdoors.
4. Do not use the sensor in the environment where humidity is high and condensation may occur.
5. Do not use the sensor under the environment under the other conditions in excess of rated.
6. Do not use the sensor in place that is exposed by direct sunlight.
7. Do not use the sensor in place where the sensor may receive direct vibration or shock.
8. Do not use the thinner, alcohol, or other organic solvents.
9. Never disassemble, repair nor tamper with the sensor.
10. Please process it as industrial waste.


#### **Precautions for Correct Use**

1. Laying Sensor wiring in the same conduit or duct as high-voltage wires or power lines may result in malfunction or damage due to conduit or use shielded cable.
2. Do not pull on the cable with excessive force.
3. If a commercial switching regulator is used, ground the FG (frame ground) terminal.
4. The sensor will be available 100 ms after the power supply is tuned ON. Start to use the sensor 100 ms or more after turning ON the power supply. If the load and the sensor are connected to separate power supplies, be sure to turn ON the sensor first.
5. Output pulses may be generated even when the power supply is OFF. Therefore, it is recommended to first turn OFF the power supply for the load or the load line.
6. The sensor must be mounted using the provided nuts. The proper tightening torque range of E3FA/E3RA plastic housing series is between 0.4 and 0.5 N·m. The proper tightening torque of E3FB/E3RB metal housing series is 20 N·m max..







## Attached nut

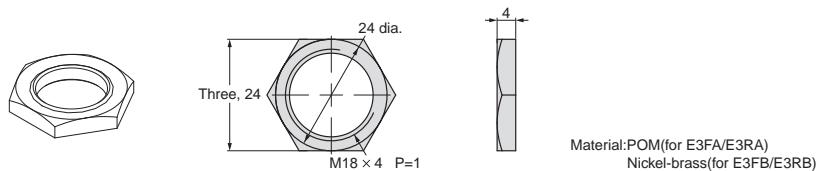


## Accessories (Order Separately)

### Reflectors

#### E39-R1S

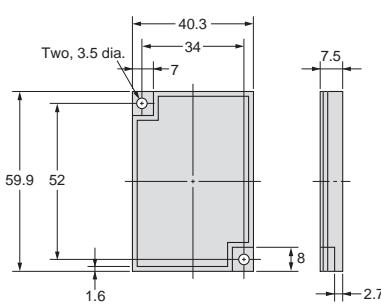


#### E39-RP1

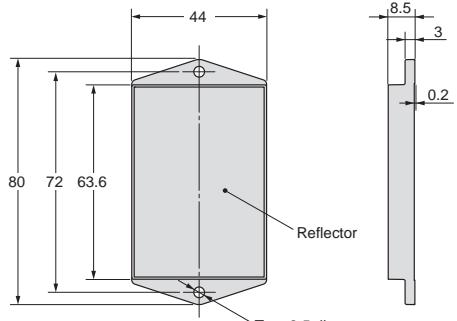


### Mounting brackets

#### E39-L183

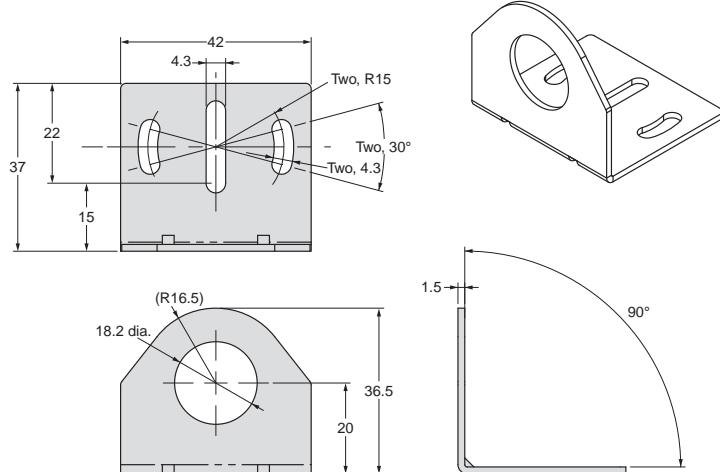

### Mounting brackets

#### E39-L182

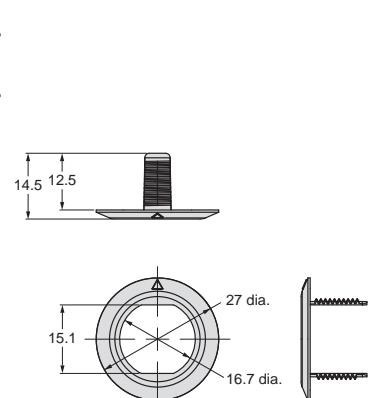

**ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.**

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

**Note: Do not use this document to operate the Unit.**

**OMRON Corporation Industrial Automation Company**

**Kyoto, JAPAN**

**Contact : [www.ia.omron.com](http://www.ia.omron.com)**

**Regional Headquarters**

**OMRON EUROPE B.V.**  
Wegalaan 67-69, 2132 JD Hoofddorp  
The Netherlands  
Tel: (31) 2356-81-300 Fax: (31) 2356-81-388

**OMRON ASIA PACIFIC PTE. LTD.**  
438B Alexandra Road, #08-01/02 Alexandra  
Technopark, Singapore 119968  
Tel: (65) 6835-3011 Fax: (65) 6835-3011

**OMRON ELECTRONICS LLC**  
2895 Greenspoint Parkway, Suite 200  
Hoffman Estates, IL 60169 U.S.A.  
Tel: (1) 847-843-7900 Fax: (1) 847-843-7787

**OMRON (CHINA) CO., LTD.**  
Room 2211, Bank of China Tower,  
200 Yin Cheng Zhong Road,  
PuDong New Area, Shanghai, 200120, China  
Tel: (86) 21-6023-0333 Fax: (86) 21-5037-2388

**Authorized Distributor:**

©OMRON Corporation 2012-2025 All Rights Reserved.  
In the interest of product improvement,  
specifications are subject to change without notice.

**CSM\_4\_2**  
**Cat. No. E423-E1-04** 0125 (0612)