


Metal Film Resistors

OBSOLETE

MFR4P Series

- Smallest size for power rating
- Resistance range: 1 ohm to 1M ohms
- Temperature coefficient down to 50ppm/°C

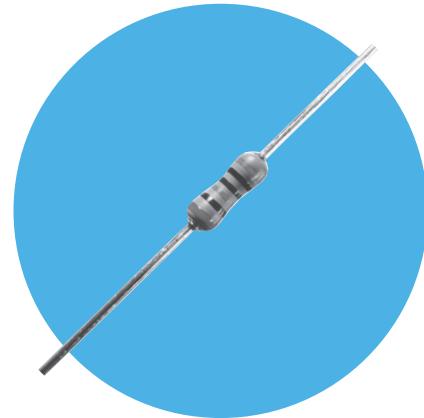

All Pb-free parts comply with EU Directive 2011/65/EU (RoHS2)

Electrical Data

		MFR4P	
Power rating at 70°C	watts	0.6	
Resistance range	ohms	1R0 to 1M	
Limiting element voltage	volts	250	
TCR	ppm/°C	50	
Resistance tolerance	%	0.5, 1, 2, 5	
Standard values		E24 preferred	
Thermal impedance	°C/watt	130	
Ambient temperature range	°C	-55 to 155	

Physical Data

Dimensions (mm) & Weight (g)							
Type	L Max	D Max	f min	d nom	PCB mounting centres	Min. bend radius	Wt.nom
MFR4P	6.2	2.5	21.0	0.6	10.2	0.6	0.3

Construction

The resistance element is a precisely controlled thin film of metal alloy sputtered on to a high purity ceramic core, protected by a moisture-resistant, high dielectric strength coating applied so that terminations remain completely clear.

This permits a well defined body length, (clean lead to clean lead dimension L).

Terminations

Material Solder-coated copper wire.

Strength The terminations meet the requirements of IEC 68.2.21

Solderability The terminations meet the requirements of IEC 115-1, Clause 4.17.3.2

Marking

Resistors are colour coded with 6 bands. IEC 62 colours are used.

Solvent Resistance

The body protection and marking are resistant to all normal industrial cleaning solvents suitable for printed circuits.

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability.
All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

BI Technologies IRC Welwyn

<http://www.ttelectronics.com/resistors>

MFR4P Series

OBSOLETE

Performance Data

		Maximum
Load at rated power : 1000 hours at 70°C	ΔR %	0.5
Shelf life : 12 months at room temperature	ΔR %	0.1
Derating		Zero at 155°C
Short term overload	ΔR %	0.5
Climatic	ΔR %	0.5
Climatic category		55/125/56
Long term damp heat	ΔR %	1
Temperature rapid change	ΔR %	0.5
Resistance to solder heat	ΔR %	0.5
Vibration and bump	ΔR %	0.5
Noise. (in a decade of frequency)	µV/V	0.1
Insulation resistance	ohms	>1G
Voltage proof	volts	500 min

Packaging

MFR4P resistors are supplied tape packed ready for loading onto automatic sequencing and insertion machines.

The standard taping method and critical dimensions are shown in Figure 1.

Component wires will not protrude beyond the outside edge of the tapes.

Alternative packaging available by request.

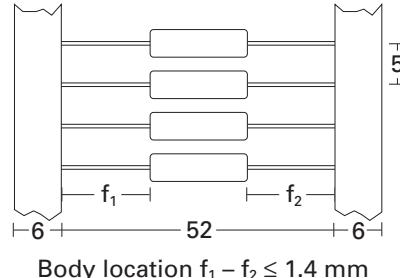


Figure 1

Lead Formed resistors can also be supplied. Standard options of Lancet, Radial and Goalpost forming are available by request.

Ordering Procedure

Example: MFR4P at 6.8 kilohms and 5% tolerance in ammo pack box of 5000 pieces –

Type	<u>M F R 4 P - 6 K 8 J I</u>													
Value (use IEC62 code)	<u> </u>													
Tolerance (use IEC62 code)	<u> </u>													
<table border="1"> <tr> <td>D</td> <td>0.5%</td> <td>G</td> <td>2%</td> <td></td> </tr> <tr> <td>F</td> <td>1%</td> <td>J</td> <td>5%</td> <td></td> </tr> </table>					D	0.5%	G	2%		F	1%	J	5%	
D	0.5%	G	2%											
F	1%	J	5%											
Packing	<u> </u>													
<table border="1"> <tr> <td>I</td> <td>Ammo</td> <td>MFR4P</td> <td>5000/box</td> <td>Standard</td> </tr> </table>					I	Ammo	MFR4P	5000/box	Standard					
I	Ammo	MFR4P	5000/box	Standard										

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability.

All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

BI Technologies IRC Welwyn

<http://www.ttelectronics.com/resistors>