


The CSM-8Q is a compact SMD Crystal with a 7.0 x 5.0 mm footprint.
AEC-Q200 Qualified

CSM-8Q SMD Crystal

[Request a Sample](#)

OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS

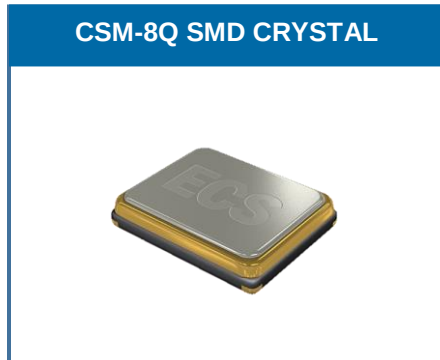

- Compact and Low Profile
- 7.0 x 5.0 mm Footprint
- RoHS Compliant
- AEC-Q200 Qualified

PARAMETERS	CONDITIONS	CSM-8Q			UNITS
		MIN	TYP	MAX	
Frequency		8.000		36.000	MHz
Mode of Oscillation	Fundamental				
Frequency Tolerance*	@ +25°C			± 30	ppm
Frequency Stability*	-55 ~ +125°C (DU Option)			± 100	ppm
Shunt Capacitance	Co			7	pF
Load Capacitance	Specify in P/N	10	20	Series	pF
Drive Level	DL			100	μW
Operating Temperature*	T _{opr} (DU Option)	-55		+125	°C
Storage Temperature	T _{stg}	-55		+125	°C
Aging (First Year)	@ +25°C ±3°C			±5	ppm

DIMENSIONS (mm)

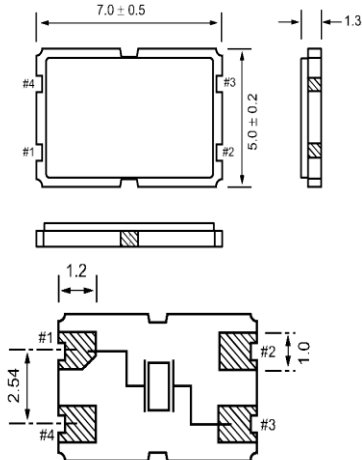


Figure 1) Top, Side, and Bottom

Crystal is symmetrical, pad 1 & 3 are interchangeable.
Chamfer on the bottom pad has no electrical significance.

Pad Connections	
1	In/Out
2	Gnd
3	Out/In
4	Gnd

Frequency (MHz)	ESR Ω Max.
8.000 ~ 15.999	60
16.000 ~ 36.000	40

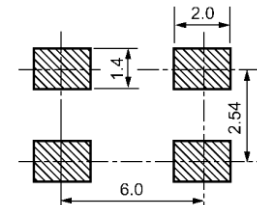


Figure 2) Suggested land pattern

PART NUMBERING GUIDE: Example ECS-200-20-20BQ-DU-TR


ECS - FREQUENCY ABBREVIATION		LOAD CAPACITANCE	PACKAGE	Tolerance Range	AVAILABLE OPTIONS		PACKAGING
					Stability	Temp	
ECS	200 = 20.000 MHz See P/N Guide	20 = 20 pF S = Series	20BQ = CSM-8Q	Blank = Std A = ± 25 ppm J = ± 20 ppm R = ± 15 ppm C = ± 10 ppm	Blank= Std D= ±100 ppm E = ± 50 ppm G = ± 30 ppm H = ± 25 ppm T = ± 20 ppm † W = ±15 ppm † K = ± 10 ppm †	Blank= Std L = -10 ~ +70°C M = -20 ~ +70°C Y = -30 ~ +85°C N = -40 ~ +85°C P = -40 ~ +105°C S = -40 ~ +125°C U = -55 ~ +125°C	TR = Tape & Reel 1K/Reel
* Specify available options in P/N.							
† Contact ECS for availability over extended temp range							
Rev 201							

* Specify available options in P/N.

† Contact ECS for availability over extended temp range.

Rev.2017

POCKET TAPE DIMENSIONS (mm)

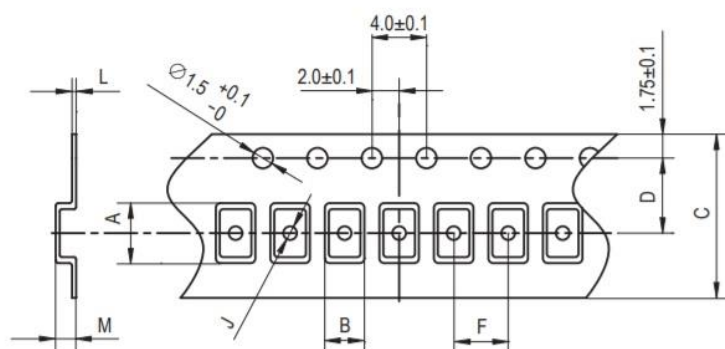

A	B	C	D	F	J	L	M	Reel Dia.	Qty/Reel
7.3	5.3	16.0	7.5	8.0	1.5	0.3	1.9	178	1000pcs

SOLDER PROFILE

Peak solder Temp +260°C Max 10 sec Max.
2 Cycles Max.
MSL 1, Lead Finish Au

DEVELOPED FREQUENCIES

Abbreviation	Frequency (MHZ)
080	8.000
098.3	9.83040
100	10.000
110.5	11.0592
120	12.000
150	15.000
160	16.000
200	20.000
240	24.000
250	25.000

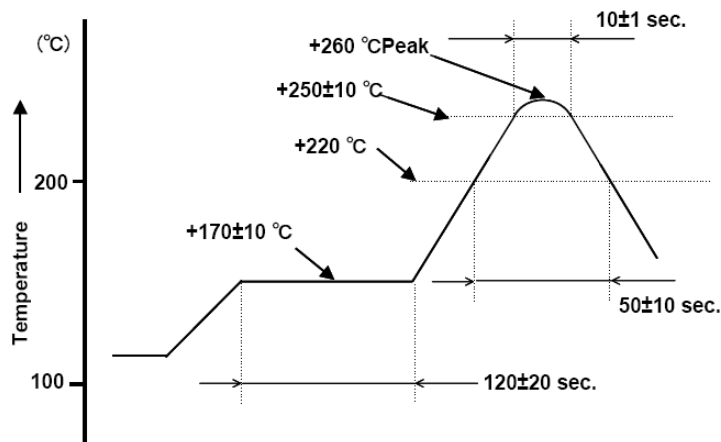


Figure 1) Suggested Reflow Profile