

Vishay Dale

Thick Film Chip Resistors, Military / Established Reliability MIL-PRF-55342 Qualified, Type RM



MATERIAL SPECI	MATERIAL SPECIFICATIONS										
Resistive element	Ruthenium oxide										
Encapsulation	Ероху										
Substrate	96 % alumina										
Termination	Solder-coated nickel barrier										
Solder finish	Tin / lead solder alloy										

FEATURES

HALOGEN FREE

- Fully conforms to the requirements of MIL-PRF-55342
- Established reliability verified failure rate; M, P, R, U, S, V, and T levels
- Construction is sulfur impervious against a high sulfur environment (ASTM B 809-95 test method)
- 100 % group A screening per MIL-PRF-55342
- Termination style B tin / lead wraparound over nickel barrier
- Operating temperature range is -65 °C to +150 °C
- For MIL-PRF-32159 zero ohm jumpers, see Vishay Dale's RCWPM Jumper (Military M32159) datasheet (www.vishay.com/doc?31028)
- Material categorization: for definitions of compliance please see <u>www.vishay.com/doc?99912</u>

STANDARD ELECTRICAL SPECIFICATIONS												
VISHAY DALE MODEL	MIL-PRF-55342 STYLE	MIL SPEC. SHEET	TERM.	CASE SIZE	POWER RATING P ₇₀ °C W	MAX. WORKING VOLTAGE ⁽¹⁾ V	$\begin{array}{c} \textbf{RESISTANCE} \\ \textbf{RANGE} \\ \Omega \end{array}$	TOLERANCE ± %	TEMPERATURE COEFFICIENT ⁽²⁾ ± ppm/°C			
DOM/DM 0500					0.05		1 to 9.1	2, 5, 10	200, 300			
RCWPM-0502, RCWPM-0502-98	RM0502	01	В	0502		40	10 to 22M	1, 2, 5, 10	100, 200, 300			
110001 101 0302 30							10 to 10M	0.5	100, 200, 300			
DOWDM 550							1 to 9.1	2, 5, 10	200, 300			
RCWPM-550, RCWPM-550-98	RM0505	02	В	0505	0.125	40	10 to 22M	1, 2, 5, 10	100, 200, 300			
110001 101 330 30							10 to 10M	0.5	100, 200, 300			
DOM/DM 5400							1 to 5.1	2, 5, 10	200, 300			
RCWPM-5100, RCWPM-5100-98	RM1005	03	В	1005	0.20	75	5.6 to 22M	1, 2, 5, 10	100, 200, 300			
110001 101-3100-30							5.62 to 10M	0.5	100, 200, 300			
DOMENA 5450							1 to 5.1	2, 5, 10	200, 300			
RCWPM-5150, RCWPM-5150-98	RM1505	04	В	1505	0.15	125	5.6 to 22M	1, 2, 5, 10	100, 200, 300			
110001 101 3130 30							5.62 to 10M	0.5	100, 200, 300			
DOM/DM 7005	RM2208		В	2208	0.225	175	1 to 5.1	2, 5, 10	200, 300			
RCWPM-7225, RCWPM-7225-98		05					5.6 to 22M	1, 2, 5, 10	100, 200, 300			
110001 101-7223-90							5.62 to 10M	0.5	100, 200, 300			
DOM/DM 575	RM0705			0705 ⁽³⁾	0.15		1 to 5.1	2, 5, 10	200, 300			
RCWPM-575, RCWPM-575-98		06	В			50	5.6 to 22M	1, 2, 5, 10	100, 200, 300			
110001 101-373-90							5.62 to 10M	0.5	100, 200, 300			
DOM/DM 4000							1 to 5.1	2, 5, 10	200, 300			
RCWPM-1206, RCWPM-1206-98	RM1206	07	В	1206	0.25	100	5.6 to 22M	1, 2, 5, 10	100, 200, 300			
110001 101-1200-90							5.62 to 10M	0.5	100, 200, 300			
DOMENA COAC									1 to 5.1	2, 5, 10	200, 300	
RCWPM-2010, RCWPM-2010-98	RM2010	08	В	2010	0.80	150	5.6 to 22M	1, 2, 5, 10	100, 200, 300			
110001 101-2010-90							5.62 to 10M	0.5	100, 200, 300			
DOWDM 0510							1 to 5.1	2, 5, 10	200, 300			
RCWPM-2512, RCWPM-2512-98	RM2512	09	В	2512	1.0	200	5.6 to 22M	1, 2, 5, 10	100, 200, 300			
110001 101 2312 30							5.62 to 10M	0.5	100, 200, 300			
DOWDM 1100		_	_				1 to 5.1	2, 5, 10	200, 300			
RCWPM-1100, RCWPM-1100-98	RM1010	10	В	1010	0.50	75	5.6 to 22M	1, 2, 5, 10	100, 200, 300			
110441 141-1 100-30							5.62 to 10M	0.5	100, 200, 300			
DOWDM 0400							1 to 9.1	2, 5, 10	200, 300			
RCWPM-0402, RCWPM-0402-98	RM0402	11	В	0402	0.05	30	10 to 22M	1, 2, 5, 10	100, 200, 300			
110 101 101 0402-30							10 to 10M	0.5	100, 200, 300			

Revision: 02-Sep-2021 1 Document Number: 31010



Vishay Dale

STANDARD E	STANDARD ELECTRICAL SPECIFICATIONS													
VISHAY DALE MODEL	MIL-PRF-55342 STYLE	MIL SPEC. SHEET	TERM.	CASE SIZE	POWER RATING P _{70°C} W	MAX. WORKING VOLTAGE ⁽¹⁾ V	$\begin{array}{c} \textbf{RESISTANCE} \\ \textbf{RANGE} \\ \Omega \end{array}$	TOLERANCE ± %	TEMPERATURE COEFFICIENT (2) ± ppm/°C					
RCWPM-0603,				0603	0.10		1 to 5.1	2, 5, 10	200, 300					
RCWPM-0603-98	RM0603	12	В			50	5.6 to 22M	1, 2, 5, 10	100, 200, 300					
110771 171 0000 30							5.62 to 10M	0.5	100, 200, 300					
DCMDM 0200							1 to 9.1	2, 5, 10	200, 300					
RCWPM-0302, RCWPM-0302-98	RM0302	13	В	0302	0.04	15	10 to 22M	1, 2, 5, 10	100, 200, 300					
110441 141-0302-90							10 to 10M	0.5	100, 200, 300					

Notes

• DSCC has created a series of drawings to support the need for 0201-sized product. Vishay Dale is listed as a resource on this drawing as follows:

| MAY WORKING

DSCC DRAWING NUMBER	VISHAY DALE MODEL	TERM.	POWER RATING P _{70 °C} W	RES. RANGE Ω	RES. TOL. ± %	TEMP. COEF. ± ppm/°C	MAX. WORKING VOLTAGE ⁽¹⁾ V	
07009	RCWP-0201	В	0.05	10 to 46.4 47 to 1M	1, 5	200 100	30	

This drawing can be viewed at: www.landandmaritime.dla.mil/Programs/MilSpec/ListDwgs.aspx?DocTYPE=DSCCdwg

- Continuous working voltage shall be $\sqrt{P \times R}$ or maximum working voltage, whichever is less Characteristics: K = \pm 100 ppm/°C; L = \pm 200 ppm/°C; M = \pm 300 ppm/°C MIL case size 0705 and EIA case size 0805 are dimensionally the same

GLOBAL PART NUMBER INFORMATION																							
New Global Part Numbering: M55342M02B10E0RWB (preferred part number format)																							
M	5	5	3	4		2	M	0		2	В	1		0		E [0	R	١	N	В		
MIL STYLE D55342	CHARACTERISTICS SPEC. SHEET K = 100 ppm (see Standard		HEET STYLE TOLERANCE RATE										PACKAGING (1) TP = tin / lead,				SPECIAL Blank =						
applies to Style 07 (RM1206) only.		= 200 = 300		Spe	lectr cifica table	ations	nicke wrap	l barrio paroun			ultipliers ble)	F R U : S	P = 0 = 0. = 0.	.001	6/100 %/100 6/1000 %/10	0 h 00 h 0 h ⁽²⁾	T/F UL = singl	T/R (fi = tin / R (full), tin / le e lot da = tin /	/ lead w/ES ead, T ate co	D /R ode	(dash (up to D =	andard n numbe o 1 digits = 0.5 % rance ⁽³⁾ S =	s)
applies to all other styles.												V =		: spa			T/R SV = (1000 WI	(1000 tin / le pieces B = tin	piece ead, T s), w/E / leac	s) /R SD	w/opt marki	ice level tion 1 pa ng (-97) T =	art (4)
																	W	waffle : A = tin : waffle t w/ES L = tin :	/ leac ray, D / lead		or part	level (-9 2 = otion 1 marking 20) ⁽⁴⁾	,
																	singl S2 T/F	waffle t e lot da 2 = tin / R (500 p	ate co lead piece:	, s)	part	3 = ns 2 and marking 30) ⁽⁴⁾	
Historica	l Part	Numh	erina.	M5534	12 M (12 R 10	FOR (va	ill co	ntin	ue to h	e acce	onte:	4)				(500 T/F ST =	tin / le pieces = tin / R (300 p tin / le pieces), w/E lead pieces ad, T	SD , s) /R			
M55342		- Turning	M	1410004		JZD 10	02			E		, p.c.	<i></i>	10	E0			R		7 [\	ΝB	
MIL STYLE		CHAI	RACTE	RISTIC	s	SPE	C. SHE	ET	Т	ERMIN STY				'ALUE OLER			F	AILUR RATE	E			KAGING ODE	
Notes																							_

- For additional information on packaging, refer to the Surface Mount Resistor Packaging document (<u>www.vishay.com/doc?31543</u>)
- Products with space level failure rates are only offered in packaging codes with ESD overpack and labeling. For all other failure rates, the ESD pack codes are an optional type of packaging
- Failure rates U and V require group A and B inspection ran on each production lot
- (3) Add a "D" after the packaging code at the end of the global part number to specify Vishay Dale Thick Film product with a tolerance of 0.5 %
- (4) MIL spec option 1, 2, and 3 part marking is not offered for the slash sheet 01, 02, 11, and 13 sizes




Vishay Dale

RESISTANCE TOLERANCE AND MULTIPLIERS										
		MULTIPLIER	VALUE							
± 0.5 %	± 1 %	± 2 %	± 5 %	± 10 %	MOLTIPLIER	RANGE (Ω)				
W	D	G	J	М	1	1 to 9xx				
Y	E	Н	K	N	1000	1K to 9xxK				
Z	F	Т	L	Р	1 000 000	1M to 22M				
Examples: $38W8 = 38.8 \Omega \pm 10Y0 = 10 \text{ k}\Omega \pm 0 988W = 988 \Omega \pm 0 2Z13 = 2.13 \text{ M}\Omega \pm 0 2Z$.5 %).5 %	11D3 = 11.3 10E0 = 10 k 332D = 332 2F21 = 2.21 51G0 = 51 s 10H0 = 10 k 33H0 = 33 k 22T0 = 22 k	$\Omega \pm 1 \%$ $\Omega \pm 1 \%$ $1 M\Omega \pm 1 \%$ $\Omega \pm 2 \%$ $\alpha \Delta \Delta$	15J0 = 15 Ω ± 5 % 10K0 = 10 kΩ ± 5 % 560K = 560 kΩ ± 5 % 8L20 = 8.2 MΩ ± 5 % 10M0 = 10 Ω ± 10 % 10N0 = 10 kΩ ± 10 % 2P70 = 2.7 MΩ ± 10 % 8P20 = 8.2 MΩ ± 10 %						

DIMENSIONS in inches (millimeters)






VISHAY DALE MODEL	MIL-PRF-55342 STYLE	MIL SPEC. SHEET	A (LENGTH)	B (WIDTH)	C (HEIGHT)	D (TOP TERM)	E (BOTTOM TERM)
RCWPM-0502	RM0502	01	0.055 ± 0.005 (1.40 ± 0.13)	0.023 ± 0.003 (0.58 ± 0.08)	0.015 ± 0.003 (0.38 ± 0.08)	0.010 ± 0.005 (0.25 ± 0.13)	0.015 ± 0.005 (0.38 ± 0.13)
RCWPM-550	RM0505	02	0.055 ± 0.005 (1.40 ± 0.13)	0.050 ± 0.005 (1.27 ± 0.13)	0.020 ± 0.005 (0.51 ± 0.13)	0.010 ± 0.005 (0.25 ± 0.13)	0.015 ± 0.005 (0.38 ± 0.13)
RCWPM-5100	RM1005	03	0.105 ± 0.005 (2.67 ± 0.13)	0.050 ± 0.005 (1.27 ± 0.13)	0.020 ± 0.005 (0.51 ± 0.13)	0.015 ± 0.005 (0.38 ± 0.13)	0.015 ± 0.005 (0.38 ± 0.13)
RCWPM-5150	RM1505	04	0.155 ± 0.005 (3.94 ± 0.13)	0.050 ± 0.005 (1.27 ± 0.13)	0.020 ± 0.005 (0.51 ± 0.13)	0.015 ± 0.005 (0.38 ± 0.13)	0.015 ± 0.005 (0.38 ± 0.13)
RCWPM-7225	RM2208	05	0.230 ± 0.005 (5.84 ± 0.13)	0.075 ± 0.005 (1.91 ± 0.13)	0.020 ± 0.005 (0.51 ± 0.13)	0.020 ± 0.005 (0.51 ± 0.13)	0.020 ± 0.005 (0.51 ± 0.13)
RCWPM-575	RM0705	06	0.080 ± 0.005 (2.03 ± 0.13)	0.050 ± 0.005 (1.27 ± 0.13)	0.020 ± 0.005 (0.51 ± 0.13)	0.016 ± 0.008 (0.41 ± 0.20)	0.015 ± 0.005 (0.38 ± 0.13)
RCWPM-1206	RM1206	07	0.125 ± 0.005 (3.18 ± 0.13)	0.063 ± 0.005 (1.60 ± 0.13)	0.020 ± 0.005 (0.51 ± 0.13)	0.015 ± 0.005 (0.38 ± 0.13)	0.015 ± 0.005 (0.38 ± 0.13)
RCWPM-2010	RM2010	08	0.197 ± 0.006 (5.00 ± 0.15)	0.098 ± 0.005 (2.49 ± 0.13)	0.020 ± 0.005 (0.51 ± 0.13)	0.020 ± 0.005 (0.51 ± 0.13)	0.020 ± 0.005 (0.51 ± 0.13)
RCWPM-2512	RM2512	09	0.250 ± 0.005 (6.35 ± 0.13)	0.124 ± 0.005 (3.15 ± 0.13)	0.020 ± 0.005 (0.51 ± 0.13)	0.020 ± 0.005 (0.51 ± 0.13)	0.020 ± 0.005 (0.51 ± 0.13)
RCWPM-1100	RM1010	10	0.105 ± 0.005 (2.67 ± 0.13)	0.100 ± 0.005 (2.54 ± 0.13)	0.020 ± 0.005 (0.51 ± 0.13)	0.015 ± 0.005 (0.38 ± 0.13)	0.015 ± 0.005 (0.38 ± 0.13)
RCWPM-0402	RM0402	11	0.039 ± 0.003 (0.99 ± 0.08)	0.020 ± 0.003 (0.51 ± 0.08)	0.013 ± 0.003 (0.33 ± 0.08)	0.010 ± 0.005 (0.25 ± 0.13)	0.010 ± 0.005 (0.25 ± 0.13)
RCWPM-0603	RM0603	12	0.063 ± 0.005 (1.60 ± 0.13)	0.032 ± 0.005 (0.81 ± 0.13)	0.018 ± 0.005 (0.46 ± 0.13)	0.012 ± 0.005 (0.30 ± 0.13)	0.015 ± 0.005 (0.38 ± 0.13)
RCWPM-0302	RM0302	13	0.034 ± 0.004 (0.86 ± 0.10)	0.021 ± 0.003 (0.53 ± 0.08)	0.013 ± 0.003 (0.33 ± 0.08)	0.007 ± 0.005 (0.18 ± 0.13)	0.008 ± 0.005 (0.20 ± 0.13)
RCWP-0201			0.024 ± 0.002 (0.61 ± 0.05)	0.012 ± 0.002 (0.30 ± 0.05)	0.009 ± 0.002 (0.23 ± 0.05)	0.006 ± 0.003 (0.15 ± 0.08)	0.006 + 0.002 - 0.004 (0.15 + 0.05 - 0.10)



Vishay Dale

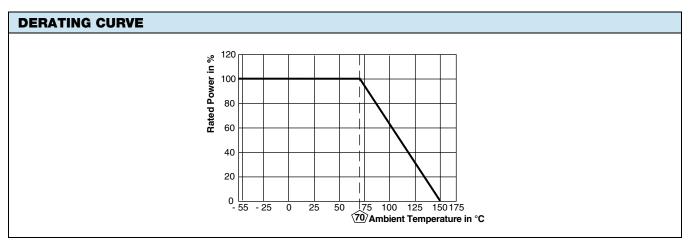

CAGE CODE: 91637 and 2799A (formerly SH903)





Vishay

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

© 2024 VISHAY INTERTECHNOLOGY, INC. ALL RIGHTS RESERVED