

# 110 WATTS

## MULTI OUTPUT AC-DC

### FEATURES:

- Compact 3.0" x 5.0" x 1.25" Size
- 3 Year Warranty
- Universal 85-264V Input
- Dual, Triple or Quad Outputs
- 87% Peak Efficiency
- 85% Average Efficiency
- <1W No Load Input Power
- IEC 60601-1 3rd ed. Medical Cert.
- IEC 62368-1 2nd ed. Certification
- IEC 60601-1-2 4th ed. EMC
- Class B Emissions per EN55011/32
- 0-70°C Operating Temperature
- RoHS Compliant
- Optional Chassis/Cover




CHASSIS/COVER



OPEN FRAME

### SAFETY SPECIFICATIONS



Underwriters Laboratories  
File E137708/E140259

UL 62368-1:2014, 2nd Edition  
CAN/CSA-C22.2 No. 62368-1-14  
AAMI/ANSI ES60601-1:2005(R) 2012  
CAN/CSA-C22.2 No. 60601-1:2014



CB Reports/Certificates (including all National and Group Deviations)  
IEC 62368-1:2014, 2nd Edition  
IEC 60601-1:2005/A1:2012



TUV SUD America  
EN 62368-1:2014, 2nd Edition  
EN 60601-1:2006/A1:2013



Low Voltage Directive (2014/35/EU of February 2014)  
RoHS Directive (Recast) (2015/863/EU of March 2015)



Electrical Equipment (Safety) Regulations 2016 SI No. 1101  
Restriction of the Use of Certain Hazardous Substances in EEE Regulations 2012 SI No. 3032 + 2019 SI No.492

### MODEL LISTING

MODEL	OUTPUT 1	OUTPUT 2	OUTPUT 3	OUTPUT 4
GRN-110-4001	+3.3V/10A	+5V/5A	+12V/2A	-12V/2A
GRN-110-4002	+5V/10A	-5V/5A	+12V/2A	-12V/2A
GRN-110-4003	+5V/10A	+24V/2A	+12V/2A	-12V/2A
GRN-110-4004	+5V/10A	+24V/2A	+15V/2A	-15V/2A
GRN-110-3001	+5V/12A		+12V/3A	-12V/3A
GRN-110-3002	+5V/12A		+15V/3A	-15V/3A
GRN-110-2001	+5V/12A	+24V/3A		
GRN-110-2002	+5V/12A	+12V/5A		
GRN-110-2003	+12V/5A	-12V/5A		
GRN-110-2004	+15V/4A	-15V/4A		

### ORDERING INFORMATION

Consult factory for alternate output configurations.

Consult factory for positive, negative or floating outputs.<sup>(13)</sup>

Please specify the following optional features when ordering:

CH - Chassis  
CO - Cover

OVP - Overvoltage Protection  
I/O - Isolated Outputs

All specifications are maximum at 25°C/110W unless otherwise stated, may vary by model and are subject to change without notice.

# GRN-110

### OUTPUT SPECIFICATIONS

Output Power at 50°C <sup>(1)</sup> (See Derating Chart)	110W	85-264 V <sub>IN</sub>
Voltage Centering	Output 1: ±0.5% Outputs 2 - 4: ±5.0%	(All outputs at 50% load)
Voltage Adjust Range	Output 1: 95-105%	
Load Regulation	Output 1: ±0.5% Outputs 2 - 4: ±5.0%	(0-100% load change)
Source Regulation	Outputs 1 - 4: 0.5%	
Cross Regulation	Outputs 2 - 4: 5.0%	
Ripple & Noise	Outputs 1 - 4: 1.0%	
Turn On Overshoot	<1%	
Transient Response	Output recovers to within 1% of initial set point due to a 50% step load change, 500μS maximum, 4% maximum deviation.	
Oversupply Protection	Latching, Output 1 between 110% and 150% of rated output voltage (optional)	
Overpower Protection	110%-150% rated P <sub>OUT</sub> , cycle on/off, auto recovery	
Hold-Up Time	16ms typical, full power, 115V input	
Start-Up Time	1 sec., 115/230V input	
Output Rise Time	25ms typical	
Minimum Load <sup>(5)</sup>	No minimum load required	

### INPUT SPECIFICATIONS

Protection Class	I
Source Voltage	85 – 264 VAC (see derating chart)
Frequency Range	47 – 63 Hz
Input Protection <sup>(6)</sup>	Internal 4A time delay fuse, 1500A breaking capacity
Peak Inrush Current	40A max at 230 V
Peak Efficiency	87%
Average Efficiency	85% (Avg. of 25%, 50%, 75% and 100% rated load)
Light Load Efficiency	85%, 115/230 V <sub>IN</sub> , 33% power
No Load Input Power	<1W, 115/230 V <sub>IN</sub> , no load

### ENVIRONMENTAL SPECIFICATIONS

Cooling	Free air convection
Ambient Operating	0°C to + 70°C
Temperature Range	Derating: see power rating chart
Ambient Storage Temp. Range	- 40°C to + 85°C
Operating Relative Humidity Range	20-90% non-condensing
Altitude	3,000m ASL Operating 12,192m ASL Non-Operating
Temperature Coefficient	0.02%/°C
Vibration	2.5G swept sine, 7-2000Hz, 1 octave/min, 3 axis, 1 hour each.
Shock	20g, 11 ms, 3 axis.


### GENERAL SPECIFICATIONS

Means of Protection	2MOPP (Means of Patient Protection) 1MOPP (Means of Patient Protection) Operational Insulation(consult factory for 1MOPP)
Dielectric Strength <sup>(8, 9)</sup>	
Reinforced Insulation	5656 VDC, Primary to Secondary
Basic Insulation	2121 VDC, Primary to Ground
Operational Insulation	707 VDC, Secondary to Ground
Leakage Current	
Earth Leakage	<300μA NC, <1000μA SFC
Touch Current	<100μA NC, <500μA SFC
Switching Frequency	100 KHz
Mean-Time Between Failures	>250,000 hours, MIL-HDBK-217F, 25°C, GB
Weight	0.79 lbs. Open frame / 1.00 lbs. Chassis and cover

### EMC SPECIFICATIONS (IEC 60601-1-2:2014, 4<sup>TH</sup> ed./IEC 61000-6-2:2005)


Electrostatic Discharge	EN 61000-4-2	±8KV contact / ±15KV air discharge	A
Radiated Electromagnetic Field	EN 61000-4-3	80MHz-2.7GHz, 10V/m, 80% AM	A
Electrical Fast Transients/Bursts	EN 61000-4-4	±2 KV, 5KHz/100KHz	A
Surge Immunity	EN 61000-4-5	±2 KV line to earth / ±1 KV line to line	A
Conducted Immunity	EN 61000-4-6	0.15 to 80MHz, 10V, 80% AM	A
Magnetic Field Immunity	EN 61000-4-8	30A/m, 60 Hz.	A
Voltage Dips	EN 61000-4-11	0% Ut, 0.5 cycles, 0-315° 0% Ut, 1 cycles, 0° 40% Ut, 10/12 cycles, 0° 70% Ut, 25/30 cycles, 0°	100/240V A/A 100/240V A/B 100/240V B/A 100/240V B/B
Voltage Interruptions	EN 61000-4-11	0% Ut, 300 cycles, 0°	100/240V B/B
Radiated Emissions	EN 55011/32	Class B	
Conducted Emissions	EN 55011/32	Class B	
Harmonic Current Emissions	EN 61000-3-2	Class A (<100W P <sub>N</sub> )	
Voltage Fluctuations/Flicker	EN 61000-3-3	Compliant	

## GRN-110 MULTI MECHANICAL SPECIFICATIONS

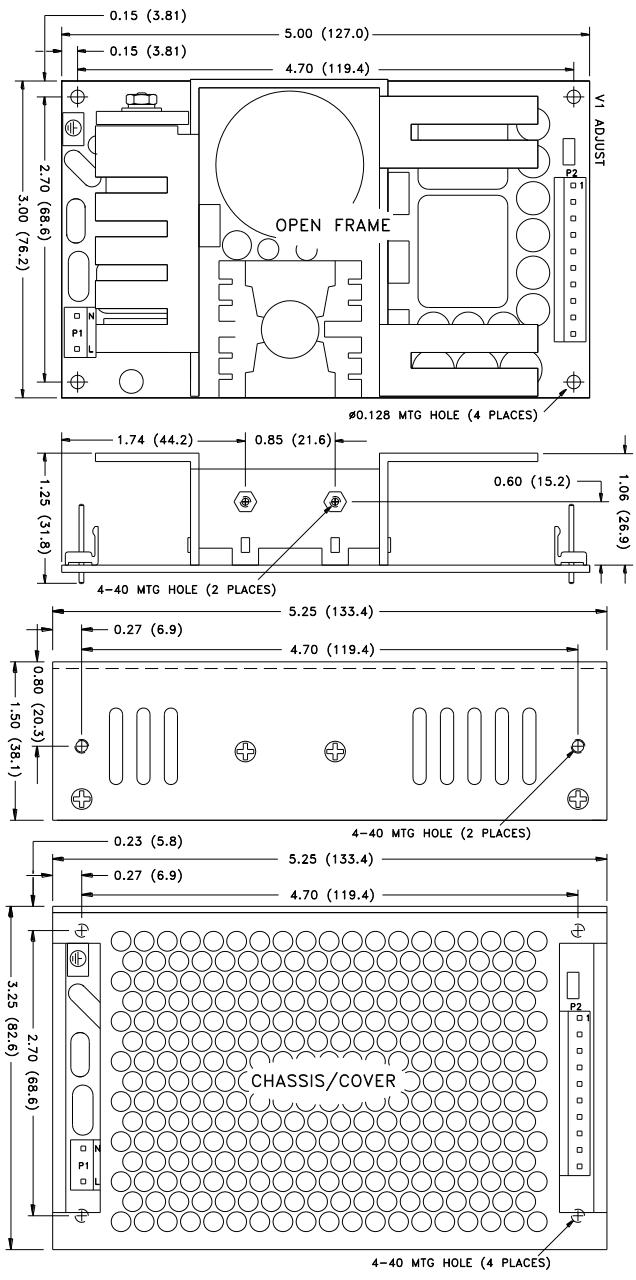


ALL DIMENSIONS IN INCHES (mm)

## CONNECTOR SPECIFICATIONS



AC Input

0.156 friction lock header mates with Tyco 640250-3 or equivalent crimp terminal housing with Tyco 3-640706-1 or equivalent crimp terminal.



DC Output

0.156 friction lock header mates with Tyco 1-770849-0 or equivalent crimp terminal housing with Tyco 3-640707-1 or equivalent crimp terminal.



Ground


0.187 quick disconnect terminal

## APPLICATIONS INFORMATION


1. Each output can deliver its rated current but Total Output Power must not exceed 110W.
2. Generally, adequate cooling is provided when semiconductor case temperatures do not exceed 70°C rise and transformer temperature does not exceed 60°C rise at any specified ambient temperature.
3. Sufficient area must be provided around power supply to allow natural movement of air to develop in convection-cooled applications.
4. This product is intended for use as a professionally-installed component within information technology, industrial, and medical equipment and is not intended for stand-alone operation.
5. Minimum load is not required for reliable operation; however, a 10% load may be required on Output 1 when loading Outputs 2, 3 or 4.
6. This product includes only one fuse in the input circuit. In consideration of clause 8.11.5 of IEC 60601-1-2005, a second fuse may be required in neutral conductor of the end product.
7. Peak-to-Peak Output Ripple and Noise is measured directly at the output terminals of the power supply, without the use of the probe ground lead or retractable tip (tip-and-barrel method), 20 MHz bandwidth.
8. This product was type-tested and safety-certified using the dielectric strength test voltages listed in Table 6 of IEC60601-1:2005. In consideration of clause 8.8.3, care must be taken to insure that the voltage applied to a reinforced insulation does not overstress different types and levels of insulation. Primary and secondary-to-ground capacitors may need to be disconnected prior to performing a dielectric strength type test on the power supply or the end product. It is highly recommended that the DC test voltage listed in DVB.1, annex DVB of UL60601-1 1<sup>ST</sup> Edition are not exceeded during a production-line dielectric strength test of the assembled end product. Please consult factory for further information.
9. This power supply has been safety-approved and final-tested using a DC dielectric strength test. Please consult factory before performing an AC dielectric strength test.
10. Maximum screw penetration into bottom chassis mounting holes is 0.100 inches. Maximum screw penetration into side chassis mounting holes is 0.188 inches.
11. To comply with emissions specifications, all four mounting hole pads must be electrically connected to a common metal chassis. Chassis/Cover option is recommended. Refer to Operating Instructions for additional information.
12. Common RF shielding precautions may need to be taken to assure emissions compliance. Refer to Operating Instructions for additional information.
13. Optional Output Configuration (consult factory).
  - V2 can be configured positive, negative or floating with respect to V1.
  - V3 can be configured positive or floating with respect to V1.
  - V4 can be configured positive, negative or floating with respect to V1.

## TYPICAL EFFICIENCY vs. LOAD

(Model GRN-110-3001 Efficiency shown)

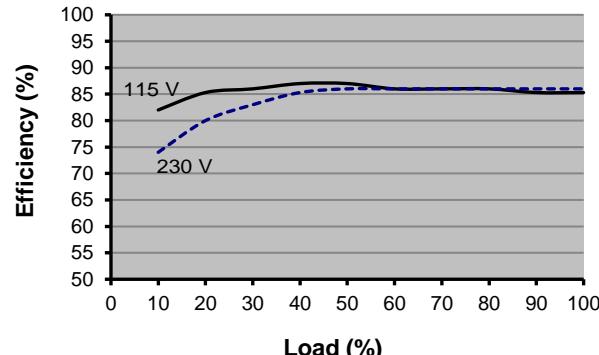

## MAX P<sub>OUT</sub> vs. AMBIENT TEMPERATURE/INPUT VOLTAGE

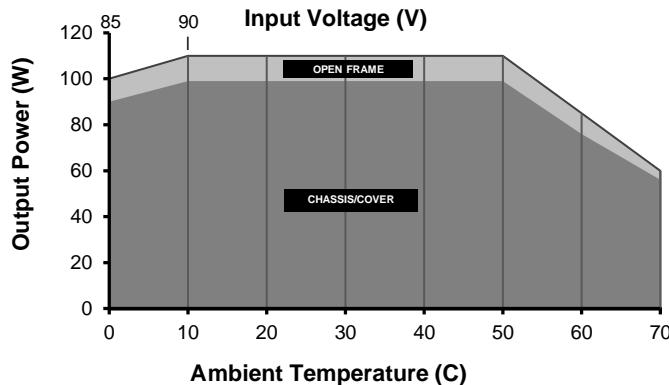

Derating requirements - Derate from 100% load at 50°C to 50% load at 70°C.

- Derate from 100% load at 90V<sub>IN</sub> to 90% load at 85V<sub>IN</sub>.
- Derate 10% with Chassis/Cover option.



INTEGRATED  
POWER DESIGNS

300 Stewart Road

Wilkes-Barre, PA 18706

Phone: (570) 824-4666

Fax: (570) 824-4843

Email: [sales@ipdpower.com](mailto:sales@ipdpower.com)

Web: [www.ipdpower.com](http://www.ipdpower.com)