



REMARK:1. NO.3 MUST WITHSTAND A 6 Lbs. MIN. PUSHOUT FORCE FROM NO.2 AFTER STAKING OPERATION

2. REMARK 1 IS MAINTAINED BY STAMPING THE SIX POINTS SHOWN ON THE DRAWING WITHOUT PUNCTURING NO.2


182120	REVISIONS				
DRAWING NO.	REV	DESCRIPTION	DATE	ECO	APPR
THIRD ANGLE PROJ. 	NC	INITIAL RELEASE	17-Feb-98	--	
	A	UPDATE DRAWING FORMAT	05-Jan-06	--	
	B	SEPERATE BODY AND SHELL	24-Mar-09	--	
	C	UPDATED PER THE LATEST SUPPLIER PRINT	26-Dec-11	2267	RV

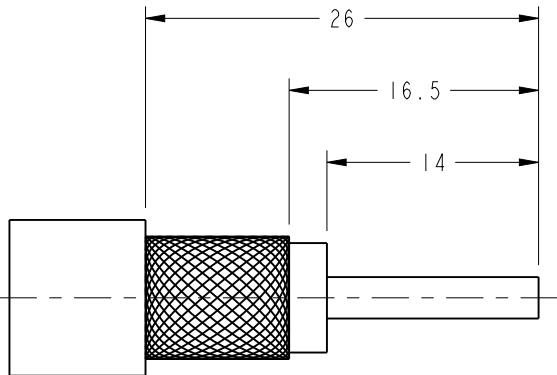

RECOMMENDED CABLE STRIPPING DIMENSIONS

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

- 1.BRASS
- 2.SILVER PL. 80 MIN. THICK OVER COPPER PL. 50 MIN. THICK
- 3.SILVER PL. 100 MIN. THICK OVER COPPER PL. 50 MIN. THICK
- 4.TEFLON
- 5.ZINC DIECAST

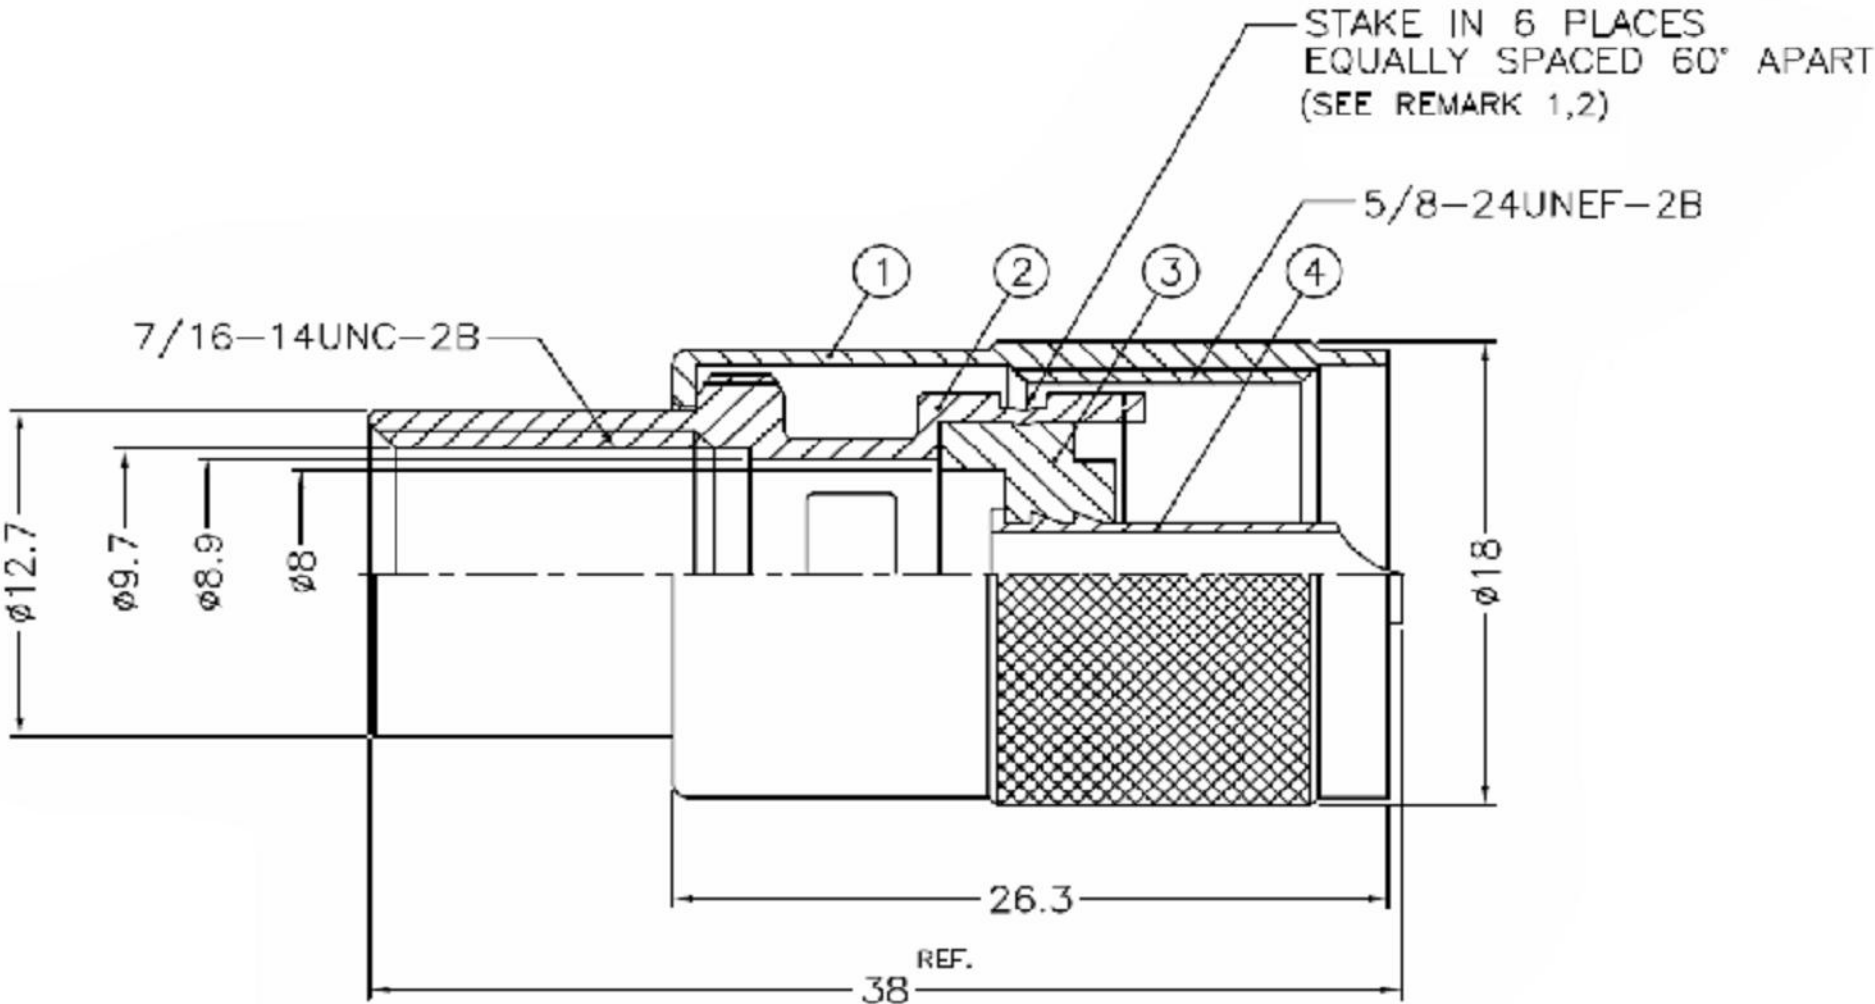

4	CONTACT PIN	BRASS	SILVER	1
3	INSULATOR	TEFLON	NATURAL	1
2	BODY	ZINC DIECAST	SILVER	1
1	SHELL	BRASS	SILVER	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 2 PLACE DECIMAL 3 PLACE DECIMAL ANGLES ±.015 (0,381 mm) ±.005 (0,127 mm) ± 1° NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	MATERIAL SEE TABLE	DRAWN RAJAVIJAYAN S	DATE 26-Dec-11	TITLE UHF SOLDER PLUG (FOR RG-8/U, RG-312/U CABLE)			Amphenol Connex		
	REFERENCE TASK # 830	ENGINEER RAJAVIJAYAN S	DATE 26-Dec-11						
		APPROVED	DATE						
			CAD FILE	DWG SIZE B	DRAWING NO. 182120	REV C			