

Datasheet of SAW Device

SAW Duplexer

for Band3 / Unbalanced / LR /1814

Murata PN: SAYEY1G74BC0B0A

Feature

- > 1814 Size
- > For LTE



Note: Murata SAW Component is applicable for Cellular /Cordless phone (Terminal) relevant market only.

Please also read caution at the end of this document.



Revision No.	Date	Description
SAYEY1G74BC0B0A_rev. A	May-09-2014	■ Initial Release
SAYEY1G74BC0B0A_rev. B	Aug-26-2014	■ Updated for MP
SAYEY1G74BC0B0A_rev. C	Sep-18-2014	■ Updated Specification

Operating temperature
 Storage temperature
 Input Power
 -20 to +85 deg.C
 -40 to +85 deg.C
 +29 dBm 5000 h 50 deg.C

- D.C. Volatage between the terminals : 3V (25+/-2 deg.C)


Minimum Resistance betweem the terminal : 1M ohm
 RoHS compliance : Yes



Package Dimensions & Recommended Land Pattern

unit: mm

Dimensions



Marking: Laser Printing

* : Month code(Refer to the table A)

\$: Date code(Refer to the table B)

1:6

2:W

3:A

Terminal Number

(6): Ant


(3):TX

(1): RX


Others: GND.

Notice) Please refer to Measurement Circuit for Port information in detail.

Land Pattern



Measurement Circuit (Top View)

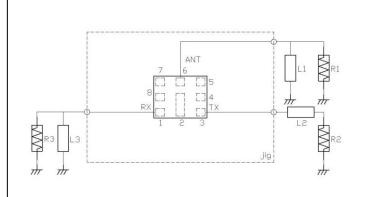

R1:50 ohm	L1 :3.9nH(Ideal inductor)						
	:4.7nH(LQP03TN4N7)						
	<reference></reference>						
R2:50 ohm	L2 :2nH(Ideal inductor)						
R3 : 50 ohm	L3 :8nH(Ideal inductor)						



Electrical Characteristic < TX→ANT. >

T>				racteri		Unit	Note		
	. /				min.	typ.	max.	Orne	14010
Center Frequency						1748		MHz	
Insertion Loss	1710.	to	1785.	MHz		2.0	2.5	dB	
	1710.	to	1785.	MHz		2.0	2.4	dB	+23 to +27deg.C
	1712.5	to	1782.5	MHz		1.8	2.4	dB _{INT}	Any 4.5MHz
	1712.5	to	1782.5	MHz		1.8	2.3	dB _{INT}	+23 to +27deg.C, Any 4.5MHz
Ripple Deviation	1710.	to	1785.	MHz		0.3	1.1	dB	Over any 5MHz in-band
VSWR	1710.	to	1785.	MHz		1.7	2.2		ANT.
	1710.	to	1785.	MHz		1.6	2.1		TX
Absolute Attenuation	10.	to	1565.42	MHz	28	34		dB	
	703.	to	748.	MHz	30	40		dB	B28 Tx CA
	716.	to	756.	MHz	35	40		dB	B28 Rx Band
	814.	to	849.	MHz	33	38		dB	B5, B26 Tx CA
	832.	to	862.	MHz	33	38		dB	B20 Tx CA
	880.	to	915.	MHz	33	37		dB	B8 Tx CA
	925.	to	960.	MHz	32	37		dB	
	1226.	to	1250.	MHz	30	34		dB	
	1496.	to	1511.	MHz	33	38		dB	B21 Rx Band
	1559.	to	1563.	MHz	36	42		dB	Compass
	1565.42		1573.37	MHz	37	43		dB	Wideband GPS, lower side-lobe
	1573.37		1577.47	MHz	38	44		dB	Regular GPS, main-lobe
	1577.47		1585.42	MHz	38	44		dB	Wideband GPS, upper side-lobe
	1597.55	to	1605.89	MHz	42	45		dB	GLONASS
	1605.89		1680.	MHz	5	14		dB	
	1805.	to	1880.	MHz	42	48		dB	Rx
	1920.	to	1980.	MHz	20	40		dB	
	2110.	to	2170.	MHz	24	38		dB	
	2400.	to	2500.	MHz	28	34		dB	ISM2.4GHz
	2620.	to	2690.	MHz	25	30		dB	
	3420.	to	3570.	MHz	20	24		dB	2fo
	4900.	to	5850.	MHz	16	25		dB	ISM5GHz
	5100.	to	5385.	MHz	18	27		dB	
	5130.	to	5355.	MHz	18	27		dB	3fo
	6840.	to	7140.	MHz	12	22		dB	
	8550.	to	8925.	MHz	6	16		dB	
	10260.	to	10710.	MHz	10	20		dB	
	11970.	to	12495.	MHz	6	16		dB	
					 	 			
	-				 	 			
					-				
					-	-			
	<u> </u>				-	-			
	-				-	-			
					-	-			
	I								Ì

^{*} Typical value at 25±2deg.C



Electrical Characteristic < ANT.→RX. >

А				Characteristics (-20 to +85 deg.C)			Unit	Note	
					min.	typ.	max.		
Center Frequency						1843		MHz	
nsertion Loss	1805.	to	1880.	MHz		2.6	3.5	dB	
	1805.	to	1880.	MHz		2.6	3.4	dB	+23 to +27deg.C
	1807.5	to	1877.5	MHz		2.2	3.3	dB _{INT}	Any 4.5MHz
	1807.5	to	1877.5	MHz		2.2	3.2	dB _{INT}	+23 to +27deg.C, Any 4.5MH;
Ripple Deviation	1805.	to	1880.	MHz		0.7	1.7	dB	Over any 5 MHz in-band
/SWR	1805.	to	1880.	MHz		1.7	2.3		ANT.
	1805.	to	1880.	MHz		1.6	2.2		RX
Absolute Attenuation	1.	to	1710.	MHz	30	39		dB	
			95.	MHz	50	109		dB	Rx-Tx
	718.	to	748.	MHz	40	55		dB	B28-B Tx for CA
	814.	to	849.	MHz	40	53		dB	B26 Tx for CA
	832.	to	862.	MHz	40	51		dB	B20 Tx for CA
	880.	to	915.	MHz	40	51		dB	B8 Tx for CA
	1447.	to	1463.	MHz	30	41		dB	B21 Tx for CA
	1615.	to	1690.	MHz	40	47		dB	2Tx - Rx
	1710.	to	1785.	MHz	43	50		dB	Tx
	1785.	to	1790.	MHz	24	49		dB	(Rx+Tx)/2
	1920.	to	6000.	MHz	25	39		dB	(IXTIX)/2
	2400.	to	2500.	MHz	40	48		dB	ISM 2.4GHz
	2500.	to	2570.	MHz	36	43		dB	B7 Tx
	2570.	to	3515.	MHz	40	45		dB	DI IX
	3515.		3760.	MHz	40	50		dB	Rx+Tx and 2x LO
	3760.	to to	13025.	MHz	15	27		dB	NX+1X and 2X LO
	4900.		5950.	MHz	31	39		dB	ISM 5GHz
	5205.	to	5660.	MHz	32	39		dB dB	
	7220.	to	7520.	MHz	27	35		dB dB	3×LO, Rx + 2Tx
		to				33			4×LO 5×LO
	9025.	to	9400.	MHz	20			dB	
	10830.		11280.	MHz	15	27		dB	6×LO
	12635.		12750.	MHz	15	33		dB	7×LO
	6000.	το	12750.	MHz	15	27		dB	
					ļ				
					-				
						L			
					<u> </u>	<u> </u>			

^{*} Typical value at 25±2deg.C



Electrical Characteristic < TX→RX. >


T	X → RX			.,.	Cha (-201	racteris to +85 d	stics eg.C)	Unit	Note
					min.		max.		
Isolation									
	1710.	to	1785.	MHz	53	55		dB	
	1712.5	to	1782.5	MHz	53	57		dB _{INT}	Any 4.5MHz
	1805.	to	1880.	MHz	50	53		dB	
	1807.5	to	1877.5	MHz	50	54		dB _{INT}	Any 4.5MHz
						ļ			


^{*} Typical value at 25±2deg.C



Electrical Characteristic

< TX→ANT. >

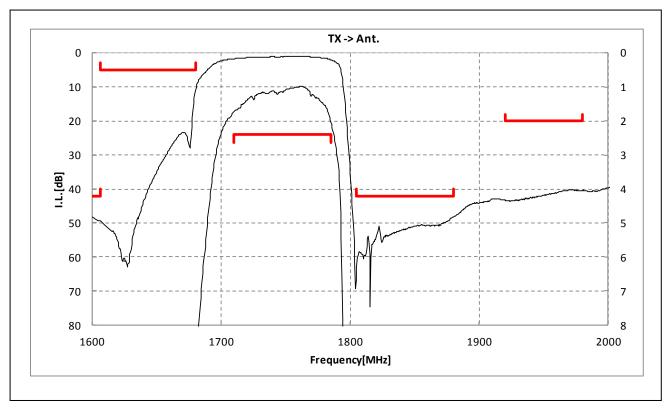


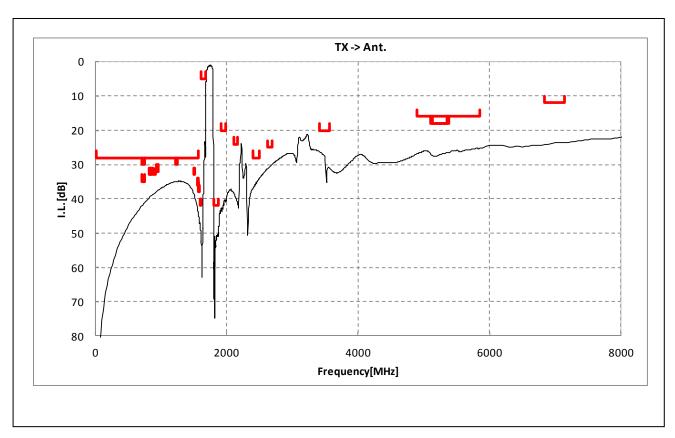




Electrical Characteristic


< ANT.→RX. >

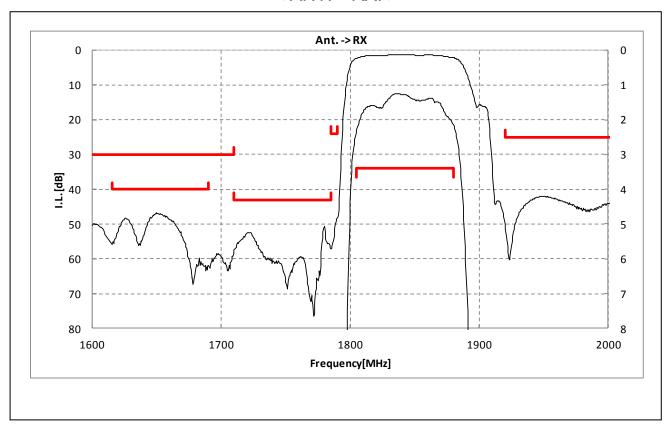


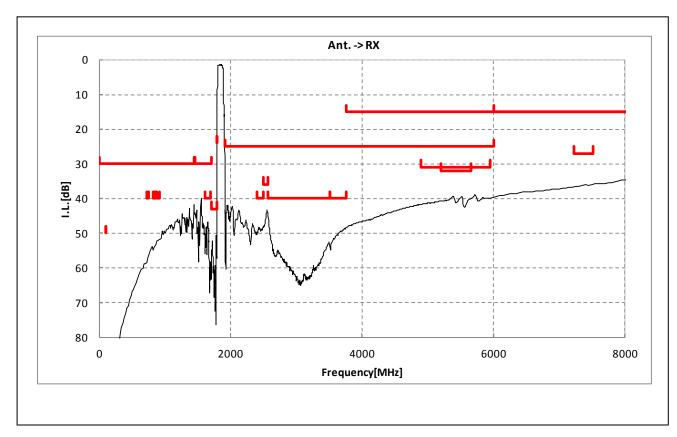




Electrical Characteristic



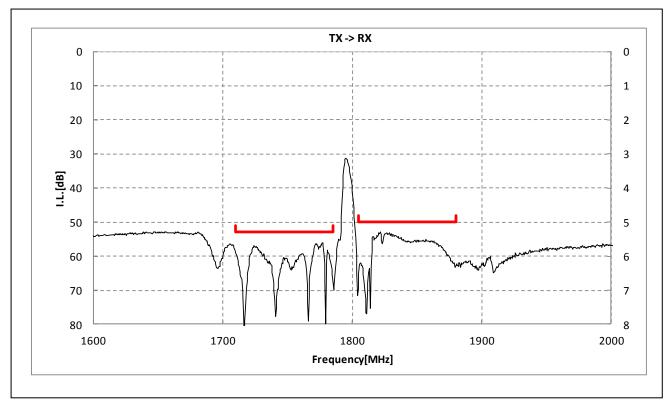


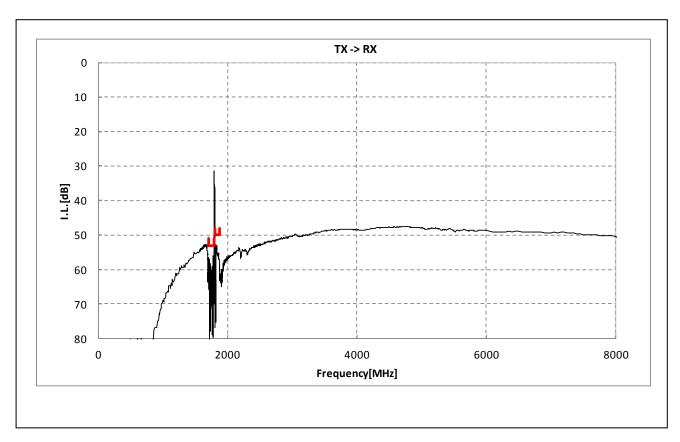




Dimensions of Tape & Reel unit: mm


Carrier Tape

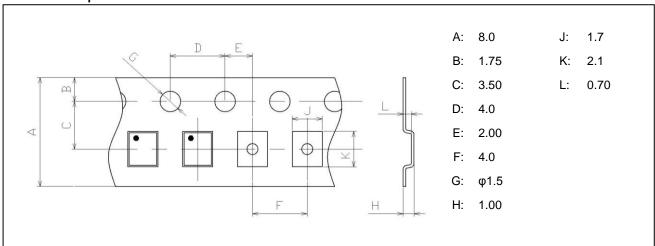

Tape

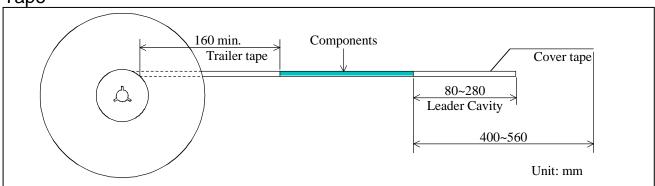

Reel

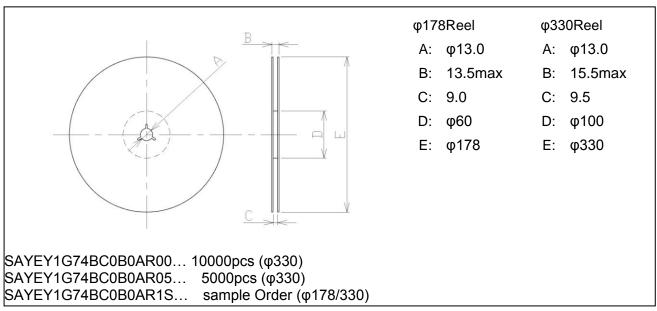



Marking Code

			B 4	4.1	\sim	
Tab	Δ	Δ.	$1 / 1 \cap$	nth	('0	באי
Iau	16	┌	IVIU	/I I L I I	-	JUG.

2009	Jan.	Feb.	Mar.	Apr.	May	Jun.	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
2013 2017	Α	В	O	D	Е	F	G	Н	J	K	L	М
2010	Jan.	Feb.	Mar.	Apr.	May	Jun.	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
2014 2018	N	Р	Ø	R	S	Т	U	٧	W	Х	Υ	Z
2011	Jan.	Feb.	Mar.	Apr.	May	Jun.	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
2011 2015 2019	Jan. a	Feb.	Mar.	Apr.	May e	Jun. f	Jul.	Aug.	Sep.	Oct.	Nov.	Dec. m
2015			-			Jun. f Jun.			Sep. j Sep.		Nov.	

Table B: Date Code

date	1st	2nd	3rd	4th	5th	6th	7th	8th	9th	10th	
code	Α	В	С	D	Е	F	G	Η	J	K	
date	11th	12th	13th	14th	15th	16th	17th	18th	19th	20th	
code	L	М	Ν	Р	Q	R	S	Т	U	V	
date	21st	22nd	23rd	24th	25th	26th	27th	28th	29th	30th	31st
code	W	X	Υ	Z	а	b	10	d	е	f	g

Important Notice (1/2)

PLEASE READ THIS NOTICE BEFORE USING OUR PRODUCTS.

Please make sure that your product has been evaluated and confirmed from the aspect of the fitness for the specifications of our product when our product is mounted to your product. All the items and parameters in this product specification/datasheet/catalog have been prescribed on the premise that our product is used for the purpose, under the condition and in the environment specified in this specification. You are requested not to use our product deviating from the condition and the environment specified in this specification. Please note that the only warranty that we provide regarding the products is its conformance to the specifications provided herein. Accordingly, we shall not be responsible for any defects in products or equipment incorporating such products, which are caused under the conditions other than those specified in this specification.

WE HEREBY DISCLAIMS ALL OTHER WARRANTIES REGARDING THE PRODUCTS, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION ANY WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE, THAT THEY ARE DEFECT-FREE, OR AGAINST INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS.

The product shall not be used in any application listed below which requires especially high reliability for the prevention of such defect as may directly cause damage to the third party's life, body or property. You acknowledge and agree that, if you use our products in such applications, we will not be responsible for any failure to meet such requirements.



Important Notice (2/2)

Furthermore, YOU AGREE TO INDEMNIFY AND DEFEND US AND OUR AFFILIATES AGAINST ALL CLAIMS, DAMAGES, COSTS, AND EXPENSES THAT MAY BE INCURRED, INCLUDING WITHOUT LIMITATION, ATTORNEY FEES AND COSTS, DUE TO THE USE OF OUR PRODUCTS IN SUCH APPLICATIONS.

- Aircraft equipment.
- Aerospace equipment
- Undersea equipment.
- Power plant control equipment Medical equipment.
- Transportation equipment (vehicles, trains, ships, elevator, etc.).
- Traffic signal equipment.
- Disaster prevention / crime prevention equipment.
- Burning / explosion control equipment
- Application of similar complexity and/ or reliability requirements to the applications listed in the above.

We expressly prohibit you from analyzing, breaking, Reverse-Engineering, remodeling altering, and reproducing our product. Our product cannot be used for the product which is prohibited from being manufactured, used, and sold by the regulations and laws in the world.

We do not warrant or represent that any license, either express or implied, is granted under any our patent right, copyright, mask work right, or our other intellectual property right relating to any combination, machine, or process in which our products or services are used. Information provided by us regarding third-party products or services does not constitute a license from us to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from us under our patents or other intellectual property.

Please do not use our products, our technical information and other data provided by us for the purpose of developing of mass-destruction weapons and the purpose of military use.

Moreover, you must comply with "foreign exchange and foreign trade law", the "U.S. export administration regulations", etc.

Please note that we may discontinue the manufacture of our products, due to reasons such as end of supply of materials and/or components from our suppliers.

Customer acknowledges that Murata will, if requested by you, conduct a failure analysis for defect or alleged defect of Products only at the level required for consumer grade Products, and thus such analysis may not always be available or be in accordance with your request (for example, in cases where the defect was caused by components in Products supplied to Murata from a third party).

The product shall not be used in any other application/model than that of claimed to Murata.

Customer acknowledges that engineering samples may deviate from specifications and may contain defects due to their development status.

We reject any liability or product warranty for engineering samples.

In particular we disclaim liability for damages caused by

- •the use of the engineering sample other than for evaluation purposes, particularly the installation or integration in the product to be sold by you,
 - ·deviation or lapse in function of engineering sample,
 - ·improper use of engineering samples.

We disclaim any liability for consequential and incidental damages.

If you can't agree the above contents, you should inquire our sales.