

MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING
BZE6-7RQ8

BZE6-7RQ8

M

DRAWING
NUMBER

ISSUE

9

PSR

REVISIONS

A

C0

38200-B

T M M

24 AUG 77

B

C053191F

T S K

13 APR 84

C

C055989

C J H

8 NOV 84

D

C054958

T S K

26 FEB 85

E

C072618

L J F

14 SEP 92

F

0016894

K R B

10 NOV 05

G

0033014

B S

29 AUG 07

29 AUG 07

29 AUG 07

29 AUG 07

29 AUG 07

29 AUG 07

29 AUG 07

29 AUG 07

29 AUG 07

29 AUG 07

29 AUG 07

29 AUG 07

29 AUG 07

29 AUG 07

29 AUG 07

29 AUG 07

29 AUG 07

29 AUG 07

29 AUG 07

RASTER
FO-92851-A

DRAWN

T M M

24 AUG 77

24 AUG 77

24 AUG 77

REPLACES

RELEASE NO.

29 AUG 07

CHECK

PSR

CHECK

PSR

CHECK

PSR



CHECK

PSR

CHECK

PSR

CHECK

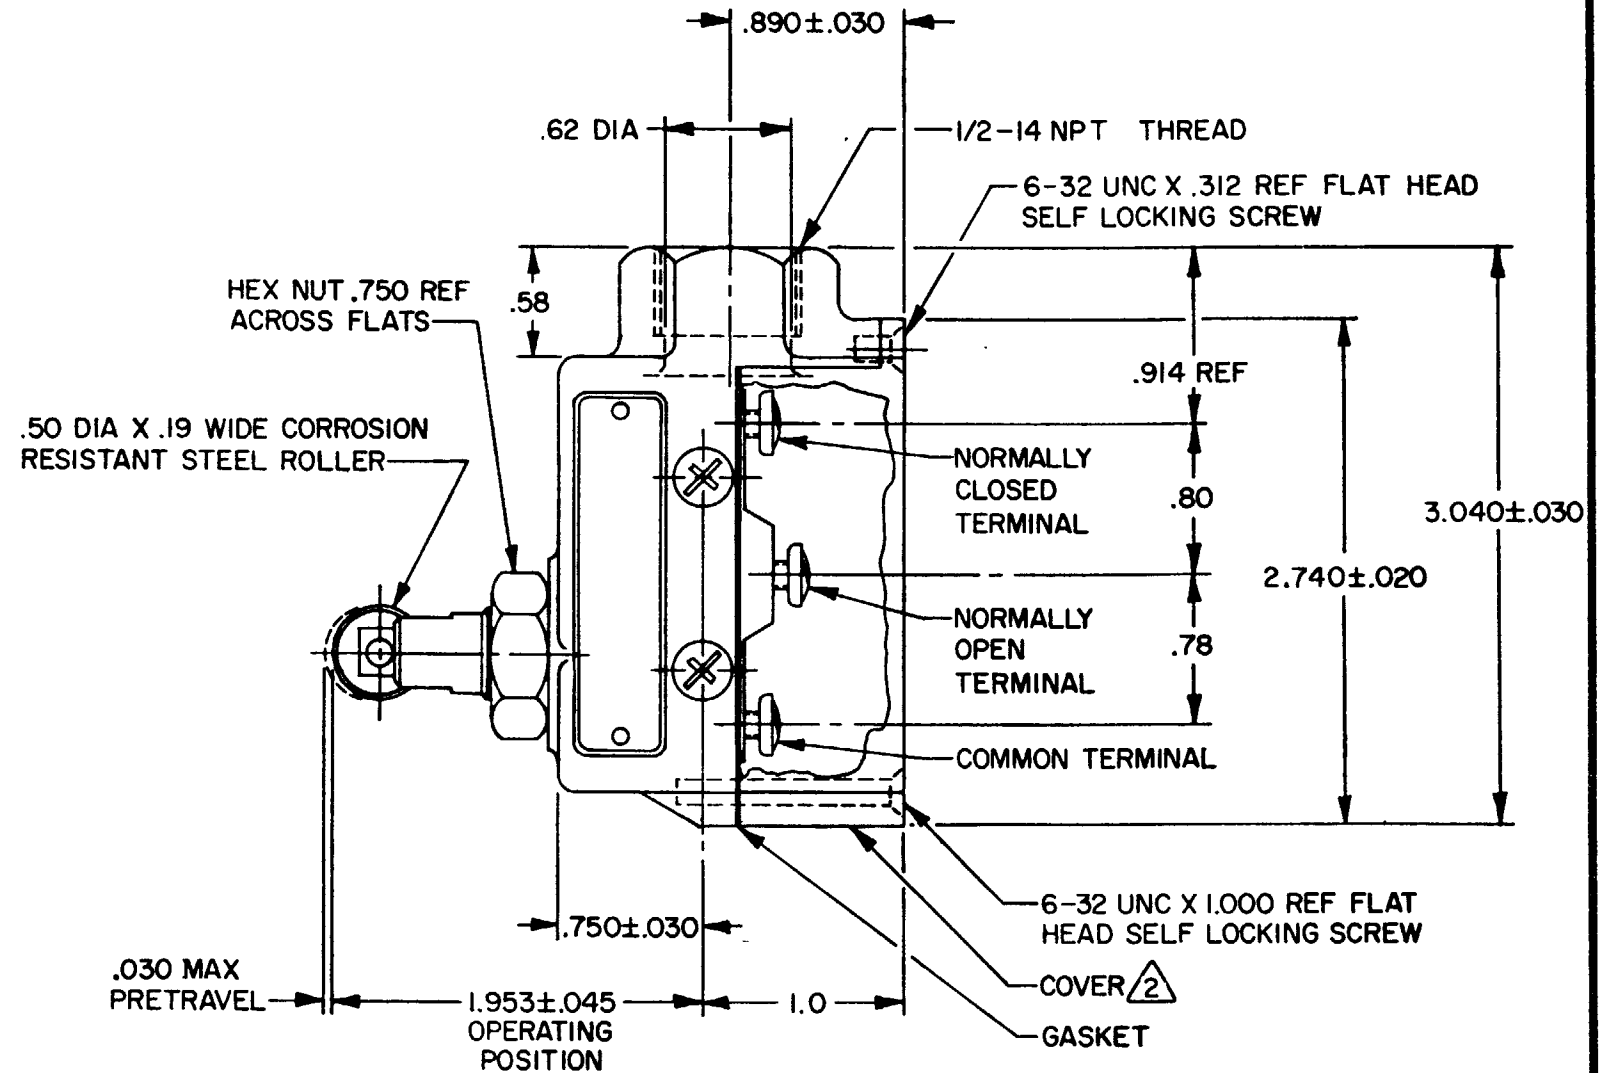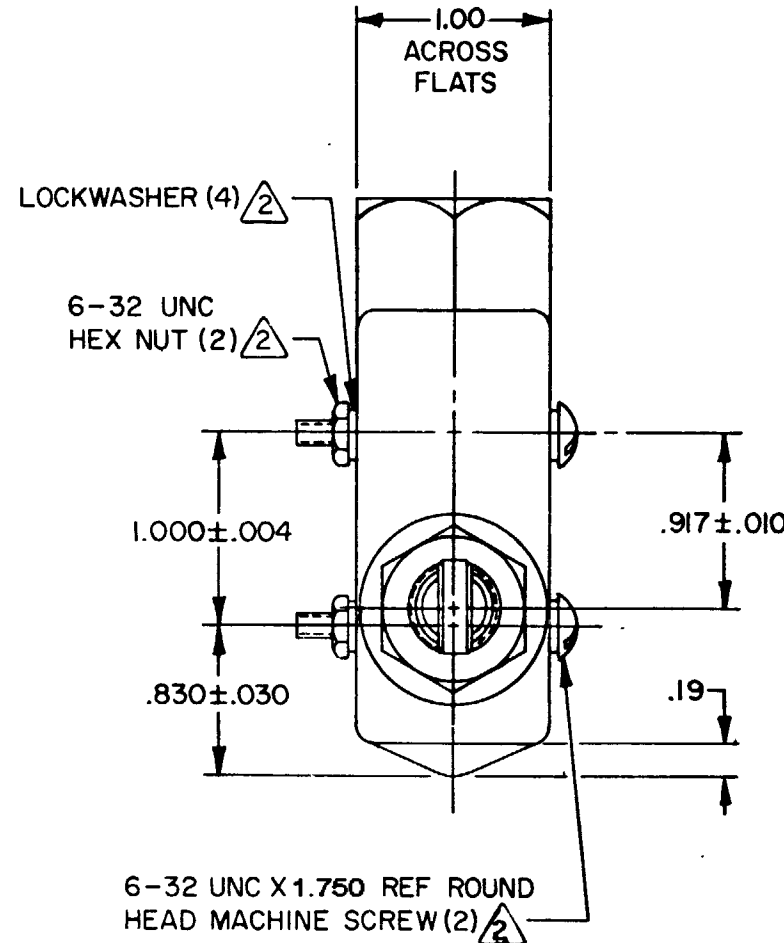

NOTES -

- 1 - 6-32 UNC X .219 REF BINDING HEAD TERMINAL SCREW AND CUPWASHER (3)
② FURNISHED UNASSEMBLED
3 - SEAL RATING: NEMA 1
IP40

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE — — 22-28 OZ	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
RELEASE FORCE — — 4 OZ MIN	15A-125, 250 OR 480 VAC, 2A-600 VAC 1/8 HP-125 VAC; 1/4 HP-250 VAC 1/2A-125 VDC; 1/4A-250 VDC CODE L74	UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES
DIFFERENTIAL TRAVEL — — .005 MAX	CE 1.5A, 240 Vac	TOLERANCES ARE:
OVERTRAVEL — — .141 MIN		ONE PLACE (.0) ±.020
BASIC SWITCH REPLACEMENT — BZ-7RQ784		TWO PLACE (.00) ±.015
		THREE PLACE (.000) ±.005
		ANGLES
		WEIGHT .56 LB

91