

PPC-L60T

VIA® Eden™ Based Fanless Panel PC with 6.4" TFT LCD and Touchscreen



Features

- 6.4" TFT VGA LCD
- VIA® Eden™ 400 MHz CPU on board
- System memory up to 512 MB SDRAM (Standard is built-in 128 MB)
- One CompactFlash® Type I/II socket (True IDE Mode)
- Microsoft® Windows® CE 4.2 and XP Embedded are available
- 10/100Base-T Ethernet
- Fanless and ultra-low power consumption
- Stainless Front cover

Introduction

PPC-L60T is a 6.4" industrial-grade Panel PC (PPC) for small interface requirements such as Human Machine Interfaces (HMI) or Multifunctional Products (MFP). PPC-L60T is highly reliable because it incorporates a low power CPU that does not need a cooling fan. The robust stainless steel enclosure makes this interface suitable for long-term solutions, and especially suitable for environments such as chemical and food processing plants. PPC-L60T comes with an embedded OS for faster application development, so driver development and customization of images do not slow down project implementation.

Specifications

- **CPU** Onboard VIA Eden 400 MHz
- **Memory** One 144-pin SODIMM socket up to 512 MB SDRAM (Standard is built-in 128 MB)
- **2nd Cache Memory** 64 KB on-die
- **Chipset** VIA PN133T (Twister™)
- **BIOS** Award 256KB Flash BIOS
- **SSD** One type I/II CompactFlash socket
PPC-L60T-RCE0 comes with one 64 MB built-in CompactFlash card
- **HDD** One internal IDE interface, 2.5" type
- **I/O Ports**
 - 2 x Serial ports: RS232 x 1, RS232/422/485 x 1
 - 1 x USB ports (V1.1)
 - 1 x PS/2 mouse and keyboard
 - 1 x VGA port
- **Network (LAN)** 10/100Base-T Ethernet
- **Watchdog Timer** 62-level, 1 ~ 62 seconds
- **Dimensions (W x H x D)** 218 x 151 x 74.2 mm (8.58" x 5.94" x 2.92")
- **Weight** 1.8 kg (3.96 lbs)

Power Supply

DC/DC Converter

- **Input Voltage** 12 V_{DC} ~ 24 V_{DC}, 3.5 A max
- **Output Voltage** 5 V @ 5 A, 12 V @ 1 A

LCD Display

- **Display Type** 6.4" TFT LCD
- **Max. Resolution** 640 x 480
- **Colors** 262 K
- **Dot Size (mm)** 0.203 x 0.203
- **Viewing Angle** 90°
- **Luminance** 150 cd/m²
- **Operating Temperature** 0 ~ 50° C
- **Backlight Lifetime** 20,000 hrs

Touchscreen


- **Type** Analog Resistive
- **Resolution** Continuous
- **Light Transmission** 80%
- **Controller** USB interface
- **Software Driver** Supports Windows 98/2000/XP
- **Durability** 10 million (Touches in a lifetime)

Environmental Specifications

- **Operating Temperature** 0 ~ 40° C
- **Relative Humidity** 10 ~ 95% @ 40° C (non-condensing)
- **Shock (Operating)** 10 G peak acceleration (11 ms duration)
- **Vibration** 1 G
- **EMC** CE, FCC Class A
- **Safety** CE, UL
- **Front Panel Protection** IP 65 / NEMA compliant

Dimensions

Unit: mm (inch)

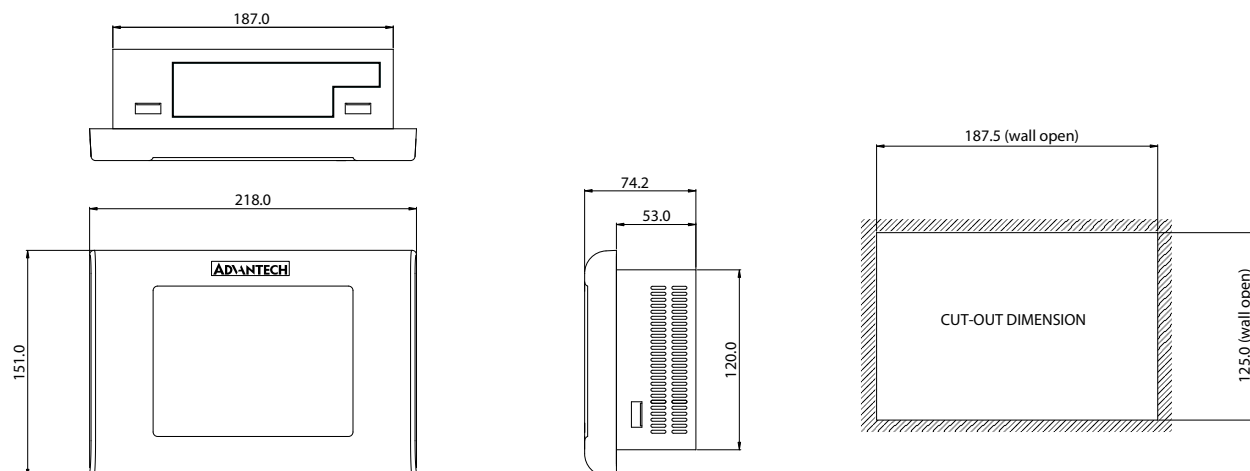

Ordering Information

- **PPC-L60T-R70-XE** VIA Eden 400 MHz based Fanless Panel PC with 6.4"VGA color TFT LCD, 128MB SDRAM and resistive touchscreen.
- **PPC-L60T-RXPE0E** PPC-L60T-R70-XE with 256 MB SDRAM and Windows XPE (English) on a 40GB HDD
- **PPC-L60T-RCE0E** PPC-L60T-R70-XE with 128MB SDRAM and Windows CE.NET 4.2 (English) on a 64 MB CompactFlash card.

Accessories


- **PS-DC19-L60** 19 V_{DC} power adapter module for PPC-L60
- **PPC-L60 WL-MT** Wall mount kit for PPC-L60 series

Embedded Software Features

PPC-L60T-RCE0E: A pre-loaded 64 MB CompactFlash card with a full OS image component of Windows CE .NET 4.2 Professional Plus, including all device drivers and an extensive range of add-ons. On the utility CD, we offer an SDK for application development by using Microsoft embedded Visual C++.

PPC-L60T-RXPE0E: 20 GB HD pre-loaded with a full component of Windows XP Embedded (SP1). OS is ready for customers to add peripherals and applications. Visual Studio 2003 can be used to develop applications.

Fully-integrated I/O

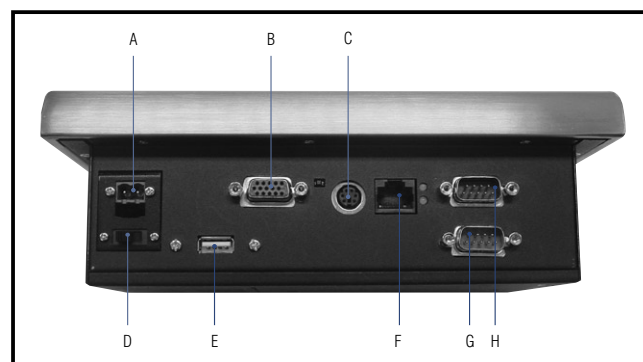

- A. DC 12 ~ 24 inlet
- B. VGA
- C. PS/2 KB/Mouse
- D. Power switch
- E. USB V1.1
- F. LAN
- G. RS-232/422/485
- H. RS-232