SK17350

THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND IT'S SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE, SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
4-28-15	NC	ECO 46720	COLE	MP	COLE

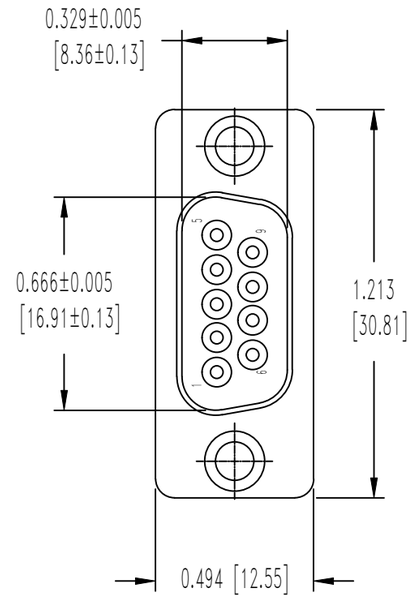

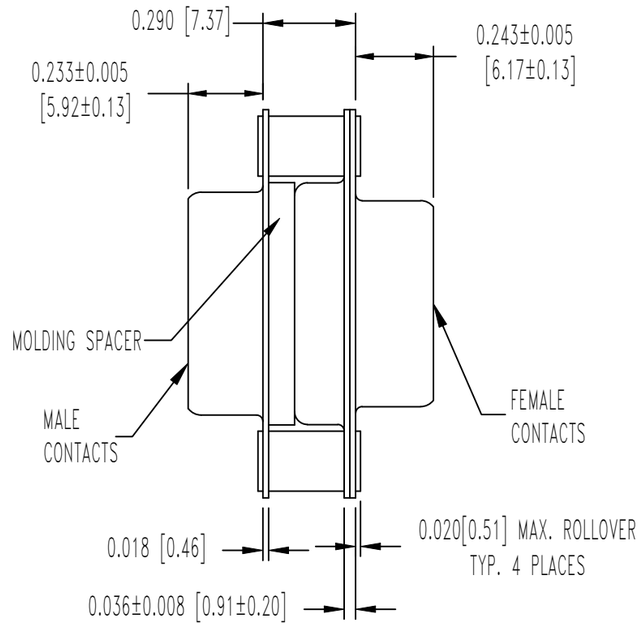

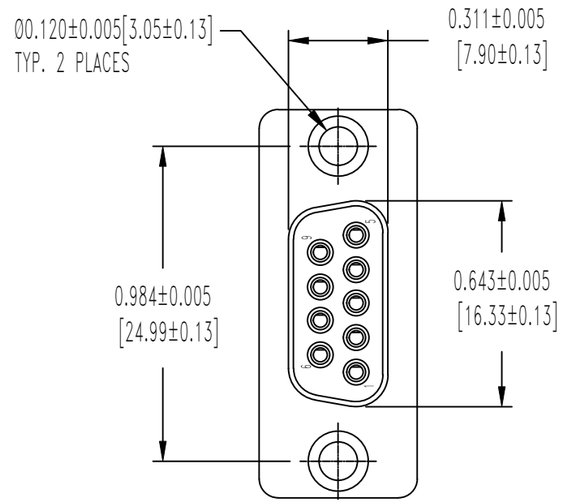

NOTES:

1. MATERIALS AND FINISHES:
   INSULATOR: GLASS FILLED DAP PER ASTM-D5948, UL 94V-0, ASTM E-595, NASA-RP-1124, COLOR: GREEN.
   CONTACTS: PRECISION MACHINED COPPER ALLOY, 0.000050 [1.27µ] GOLD OVER COPPER PLATE.
   SHELLS: BRASS, 0.000050 [1.27µ] GOLD OVER COPPER PLATE.
   MOLDING SPACER: GLASS FILLED POLYESTER, COLOR: BLUE.
2. DETAILED PRODUCT, MECHANICAL, AND ELECTRICAL INFORMATION IS AVAILABLE IN THE LATEST SPACE-D PRODUCT PUBLICATION. VISIT CONNECTPOSITRONIC.COM/PRODUCTS/62/HIGHPERFORMANCED-SUBMINIATURE OR CONNECTPOSITRONIC.COM.
3. CONNECTORS ARE COMPLIANT TO THE CURRENT ROHS DIRECTIVE.
4. DIMENSIONS ARE IN INCHES [MILLIMETERS].

POSITRONIC INDUSTRIES INC.
www.connectpositronic.com
FSCM 28198

DECIMAL TOL. ±0.015 [0.38]
ANGULAR TOL. ±5°

SAD SERIES
SCALE N.T.S.
DRAWN BY M. POP
APPROVED BY COLE

TITLE SAD9S0GM0G/AA

DATE 4-28-15
DRAWING NUMBER SK17350
REV. NC

Downloaded from Arrow.com.