
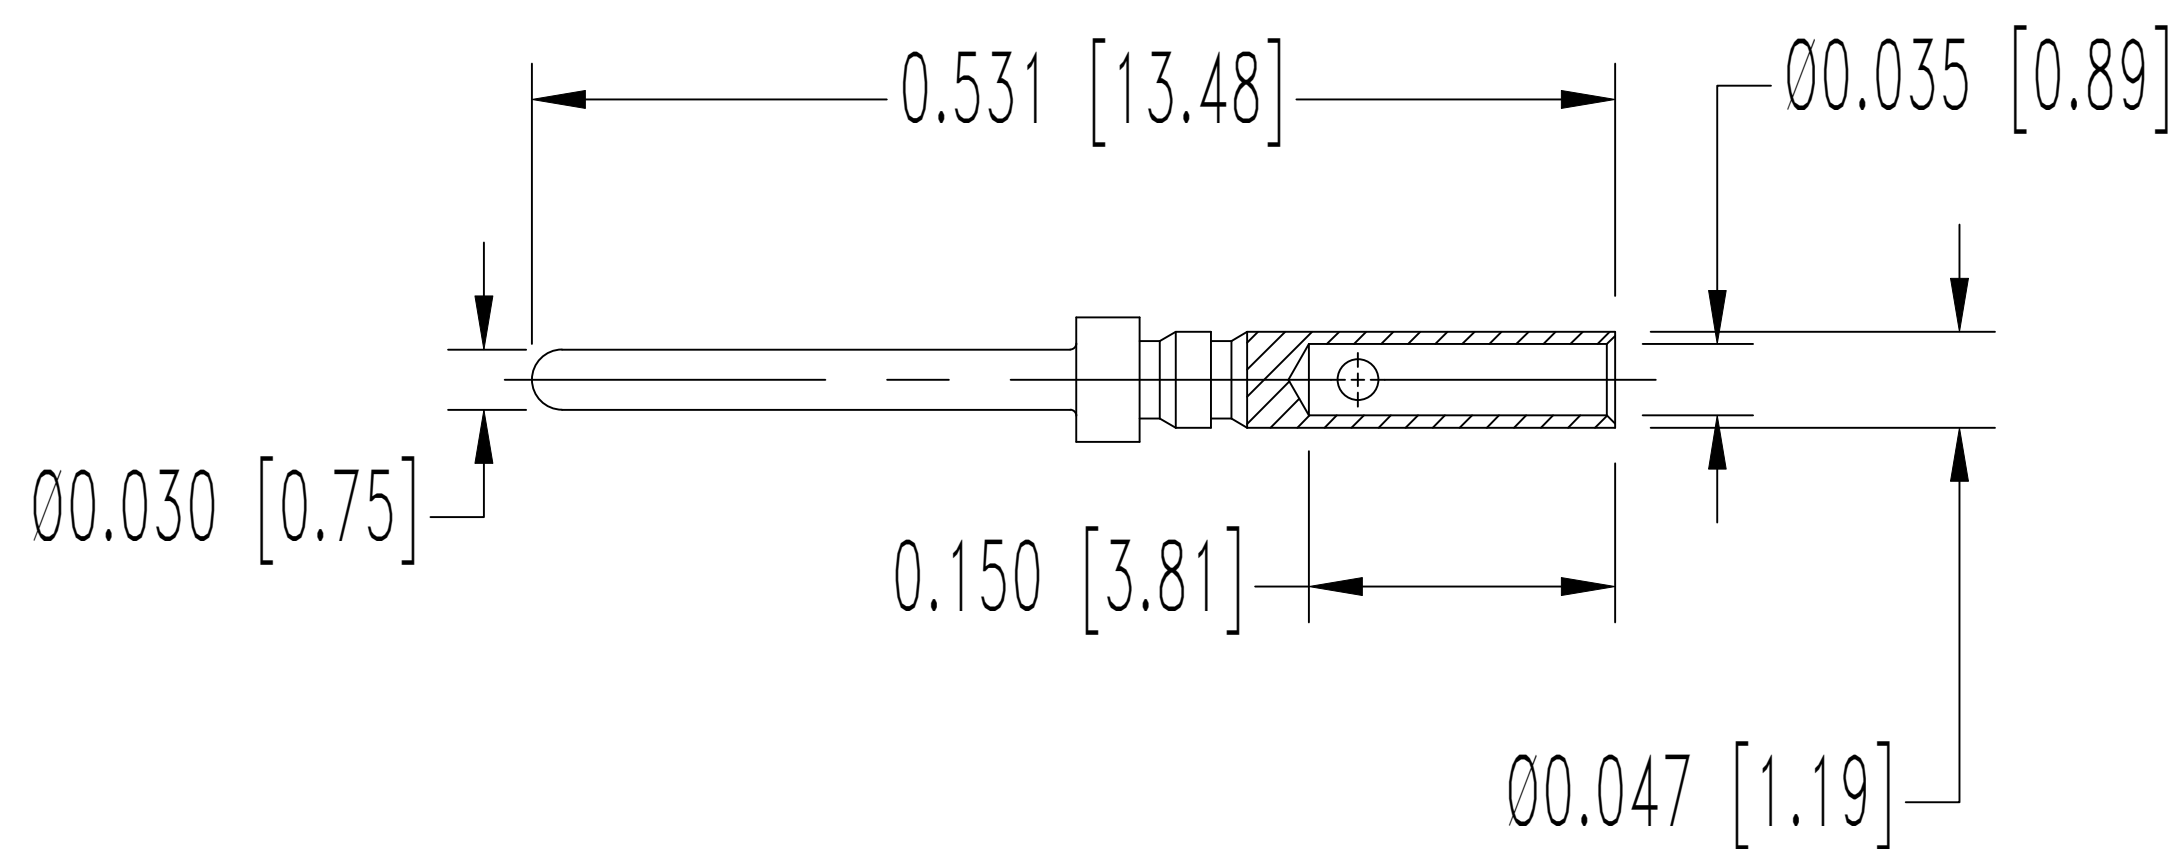


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND IT'S SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE, SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE. THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

SK8560

DATE	REV	REVISION RECORD	APP	DR	CK
5-11-07	NC	ECO 27889	RW	YK	COLE
3-30-10	A	ECO 32305	TK	BE	TK
4-28-15	B	ECO 46733	COLE	AM	COLE

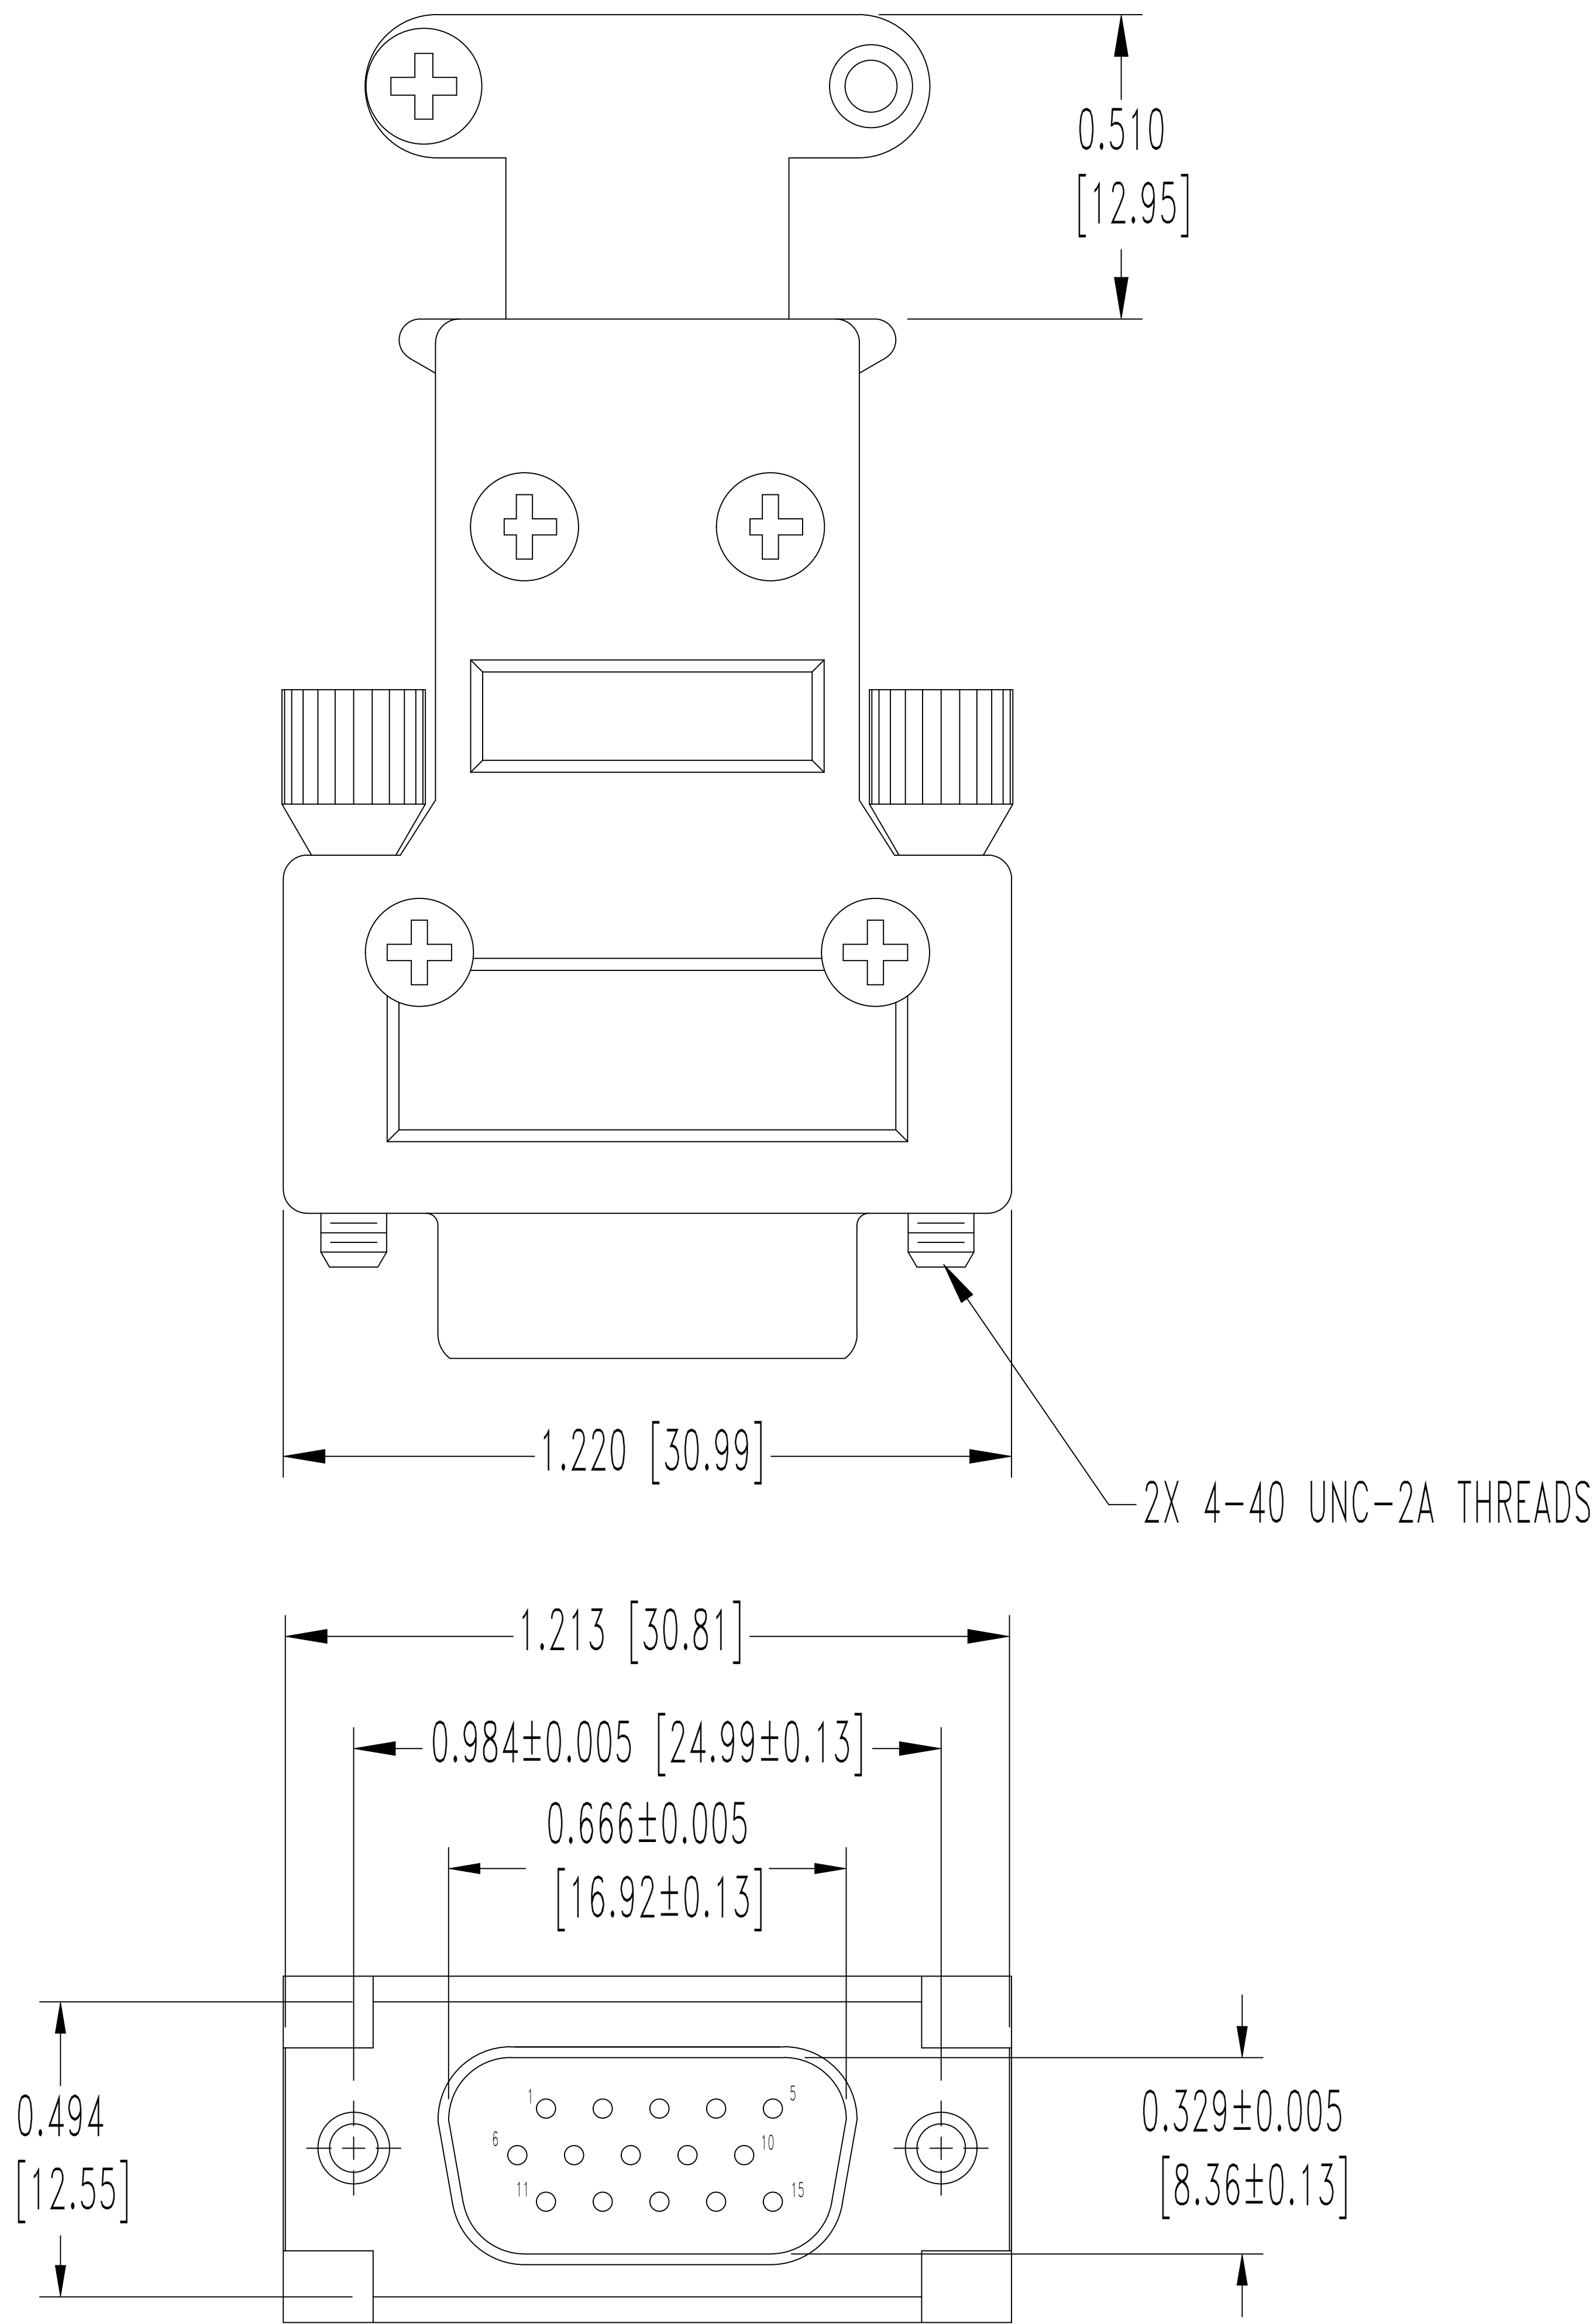

MALE CONTACT
15X (ENLARGED)

NOTES:

1. MATERIALS AND FINISHES:

INSULATOR: GLASS FILLED POLYESTER PER ASTM D5927, UL 94V-0, BLUE COLOR.

CONTACTS: PRECISION MACHINED HIGH TENSILE COPPER ALLOY, GOLD FLASH OVER NICKEL PLATE.

SHELLS: STEEL, ZINC PLATE WITH CHROMATE SEAL.

HOOD: ZINC, DIE CAST.


CABLE CLAMPS: ZINC, DIE CAST.

JACKSCREWS: STEEL, NICKEL PLATE.

SCREWS: STEEL, NICKEL PLATE.


2. DETAILED PRODUCT, ELECTRICAL, AND MECHANICAL INFORMATION IS AVAILABLE IN THE LATEST HIGH DENSITY D-SUBMINIATURE PRODUCT PUBLICATION. VISIT CONNECTPOSITRONIC.COM/PRODUCTS/59/HIGHDENSITYD-SUBMINIATURE OR CONNECTPOSITRONIC.COM.

3. DIMENSIONS ARE IN INCHES [MILLIMETERS].

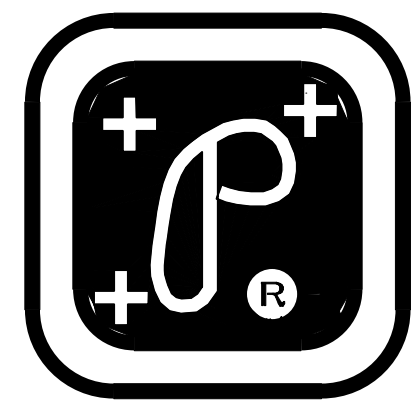


POSITRONIC
INDUSTRIES INC.

SPRINGFIELD, MISSOURI 65801

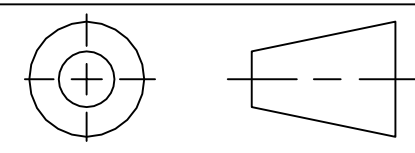

DECIMAL TOL.
± 0.015 [0.38]

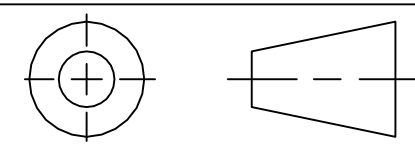

ANGULAR TOL.
± 5°

DD SERIES

SCALE

N.T.S.

DRAWN BY

YK

APPROVED BY

RW

TITLE

DD15M10GE0

DATE

5-11-07

DRAWING NUMBER

SK8560

REV.

B