




#### **Dimensions**

inches [mm]

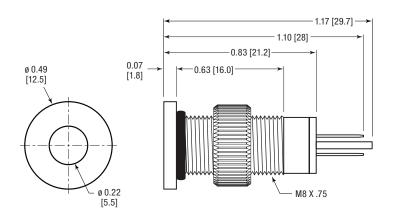

# 620 Series 8mm Heavy Duty Panel Mount Indicators

<b>Certifications &amp;</b>						
Cerniculous a	J	<b>u</b>	9			
<ul> <li>RoHS compliant</li> </ul>						
• • • • • • • • •						
• IP66/IP67						
• IK10						

• NEMA 4X

## Application

The 620 Series Heavy Duty LED Panel Mount Indicators are elegantly designed for a high-end aesthetic paired with sturdy construction. These indicators are nonmagnetic, corrosion resistant for both indoor and outdoor use, and secured to prevent dirt, dust, and water penetration. Ideal for a variety of applications such as:

- Main power indication
- Remote power indication
- Status indication
- Maintenance and warning indication
- Instrumentation
  - ... and many more!

#### **Mechanical Information**

Mounting Hole Size:	0.323" (8.2 mm)
Max Panel Thickness:	0.394" (10mm)
Mounting Torque:	7.01 lbs-ft (9.5 Nm)
Specifications	
Operating Voltage:	3 VDC (external resistor required) 6, 12 & 24 VDC (internal resistor included)
Operating Temp:	-25 °C to +70 °C (-13 °F to 158 °F)
Storage Temp:	-25 °C to +70 °C (-13 °F to 158 °F)
Electrical Connection:	Solder terminals
Housing:	Stainless Steel
Terminals:	Stainless Steel
Nut:	Stainless Steel



www.dialightsignalsandcomponents.com



### **Ordering Information 620 Series**

Part	Num	ber	Gui	de						ŀ	RoH	IS Com	pliant
6	2	0	-	1	Х	Х	Х	-	3	0		4	F
							V	/olta	ige				
							1	3V	DC				
							2	6۷	DC				
			Colo	or			3	12\	/DC				
			• R	ed	1	0	4	24	VDC				
			• G	reen	2	0							
			• Ye	ellow	3	0							
			• B	lue	4	0							

Dialight P/N	Color	Voltage (V DC)	Current (mA)	Typical Intensity (mcd)
620-1101-304F	Red			200
620-1201-304F	• Green	3		250
620-1301-304F	• Yellow	3		350
620-1401-304F	<ul> <li>Blue</li> </ul>			300
620-1102-304F	Red			200
620-1202-304F	• Green	e	15	250
620-1302-304F	Yellow	6		350
620-1402-304F	<ul> <li>Blue</li> </ul>			300
620-1103-304F	Red			200
620-1203-304F	Green			250
620-1303-304F	• Yellow	12		350
620-1403-304F	<ul> <li>Blue</li> </ul>	24		300
620-1104-304F	Red			200
620-1204-304F	• Green			250
620-1304-304F	• Yellow	24		350
620-1404-304F	<ul> <li>Blue</li> </ul>			300

Dialight reserves the right to make changes at any time in order to supply the best product possible. The most current version of this document will always be available at: www.dialightsignalsandcomponents.com Warranty Statement: Except for the warranty expressly provided for [herein/above/below], Dialight disclaims any and all other warranties, express or implied, including, without limitation, any warranties of merchantability, fitness for a particular purpose, title, and noninfringement.