

https://www.phoenixcontact.com/us/products/2901646

**PHŒNIX** CONTACT

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Patch panel, two RJ45 jacks (1:1 assignment), CAT5e, 10/100/1000 Mbps, DIN rail adapter, IP20, option of shield contacting to the DIN rail via jumpers

# Product description


Ethernet patch panels enable quick and easy connection between the field cabling and control cabinet cabling. The passive termination panels are a convenient alternative to the on-site assembly of RJ45 connectors.

# Your advantages

- · Safe shield connection to ground potential
- CAT5e
- 10/100/1000 Mbps
- · Mounting on a DIN rail
- · Easy and convenient extension for RJ45 cable
- · Optional shield connection via jumpers
- Shipbuilding approval in accordance with DNV GL
- PoE-capable in accordance with IEEE 802.3bt, type 4

# Commercial data

Item number	2901646
Packing unit	10 pc
Minimum order quantity	10 pc
Sales key	DN07
Product key	DNC331
Catalog page	Page 363 (C-6-2019)
GTIN	4046356622806
Weight per piece (including packing)	54.57 g
Weight per piece (excluding packing)	57.26 g
Customs tariff number	85366990
Country of origin	US



https://www.phoenixcontact.com/us/products/2901646



# Technical data

# Notes

Utilization restriction	
CCCex note	Use in potentially explosive areas is not permitted in China.

# **Product properties**

Product type	Patch panel
MTBF	6702 Years (Telcordia standard, 25°C temperature, 21% operating cycle (5 days a week, 8 hours a day))
	2962 Years (Telcordia standard, 40°C temperature, 34.25% operating cycle (5 days a week, 12 hours a day))

# Interfaces

Data: Ethernet interface, 10/100/1000Base-T(X) in accordance with IEEE 802.3

Serial transmission speed	10/100/1000 Mbps
Connection method	RJ45 CAT5e
No. of channels	1
Pin assignment	1:1
Transmission length	100 m (including patch cables)

Data: Ethernet interface, 10/100/1000Base-T(X) in accordance with IEEE 802.3


Connection method	RJ45 CAT5e
No. of channels	1

# Dimensions

Dimensional drawing	
Width	29 mm
Height	90 mm
Depth	53 mm

## Material specifications

	Color (Housing)	green (RAL 6021)
	Material (Housing)	PVC / PA
Са	ıble/line	
	Cable impedance	100 Ω




https://www.phoenixcontact.com/us/products/2901646



## Mechanical properties

Mechanical data	
Insertion/withdrawal cycles	≤ 2500
Environmental and real-life conditions	
Ambient conditions	
Degree of protection	IP20
Ambient temperature (operation)	-25 °C 70 °C
Ambient temperature (storage/transport)	-25 °C 85 °C
Ambient temperature (assembly)	-10 °C 70 °C
Permissible humidity (operation)	25 % 95 % (non-condensing)
Approvals ATEX	
Identification	ll 3 G Ex ec IIC Gc
Certificate	PxCIF14ATEX2901642U
Note	Please follow the special installation instructions in the documentation!
UKEX	
Identification	ll 3 G Ex ec IIC Gc
Certificate	PxCIMA21UKEX2901642U
Corrosive gas test	
Identification	ISA-S71.04-1985 G3 Harsh Group A
Shipbuilding	
Identification	DNV GL
DNV GL data	
Temperature	В
Humidity	A
Vibration	Α
EMC	В
Enclosure	Required protection according to the Rules shall be provided upon installation on board
Mounting	


Mounting type	DIN rail mounting
---------------	-------------------



2901646 https://www.phoenixcontact.com/us/products/2901646




# Drawings

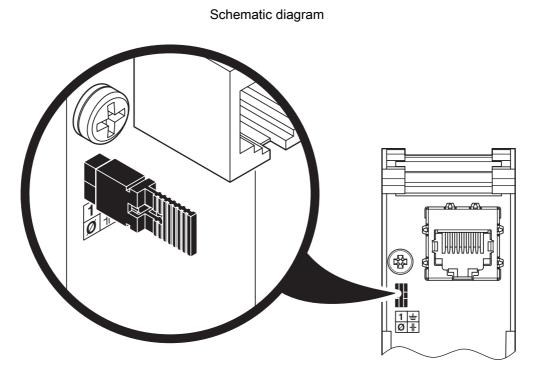

Shield connection direct to PE


Circuit diagram

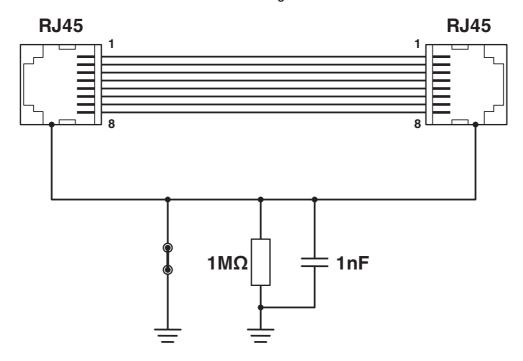




https://www.phoenixcontact.com/us/products/2901646

Dimensional drawing

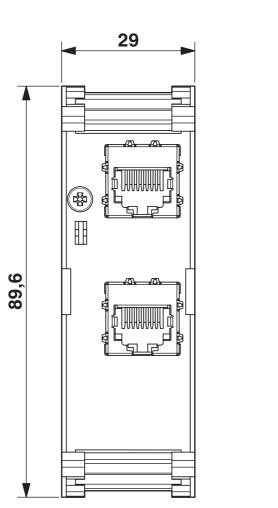


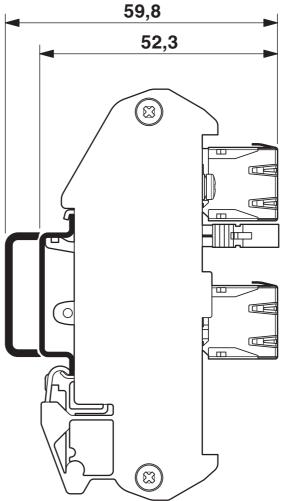

Dimensional drawing

PHŒN


X




2901646 https://www.phoenixcontact.com/us/products/2901646



Schematic diagram

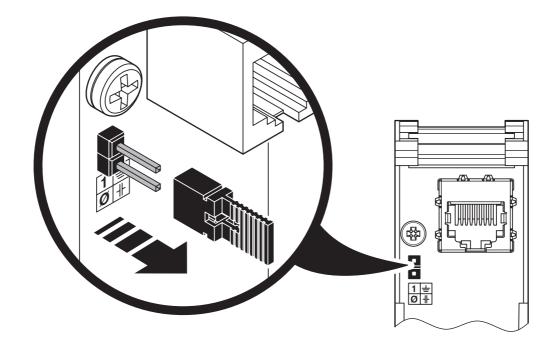

Shield connection to PE via RC element




https://www.phoenixcontact.com/us/products/2901646




# Approvals

🌣 To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/2901646



DNV GL
Approval ID: TAA00001KR



https://www.phoenixcontact.com/us/products/2901646




# Classifications

# ECLASS

ECLASS-11.0	19170112
ECLASS-12.0	19170112
ECLASS-13.0	19170112

# ETIM

	ETIM 9.0	EC002697
UN	ISPSC	
	UNSPSC 21.0	43223309




https://www.phoenixcontact.com/us/products/2901646



# Environmental product compliance

#### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%



https://www.phoenixcontact.com/us/products/2901646



Accessories

FL CRIMPTOOL - Assembly tool


2744869 https://www.phoenixcontact.com/us/products/2744869

Crimping pliers, for assembling the RJ45 plugs FL PLUG RJ45..., for assembly on site




# FL ISOLATOR 100-RJ/RJ - Network isolator

2313931





Passive network isolator for electrical isolation in Ethernet networks. This protects Ethernet devices from potential differences of up to 4 kV. Can be used for transmission speeds of up to 100 Mbps. Possible to connect two RJ45 plugs.



https://www.phoenixcontact.com/us/products/2901646



## FL ISOLATOR 1000-RJ/RJ - Network isolator

2313915

https://www.phoenixcontact.com/us/products/2313915



Passive network isolator for electrical isolation in Ethernet networks. This protects Ethernet devices from potential differences of up to 4 kV. Can be used for transmission speeds of up to 1 Gbps. Possible to connect two RJ45 plugs.

## FL ISOLATOR 100-M12 - Network isolator

2902985 https://www.phoenixcontact.com/us/products/2902985



Passive network isolator for electrical isolation in Ethernet networks. For the protection of Ethernet devices against potential differences of up to 4 kV. Can be used for transmission speeds of up to 100 Mbps. Ethernet connection via two M12 sockets (D-coded).

2901646

https://www.phoenixcontact.com/us/products/2901646



FL CAT5 PATCH 0,3 - Patch cable

2832250 https://www.phoenixcontact.com/us/products/2832250

Patch cable, CAT5, assembled, 0.3 m



FL CAT5 PATCH 0,5 - Patch cable

2832263 https://www.phoenixcontact.com/us/products/2832263



Patch cable, CAT5, assembled, 0.5 m

#### 2901646

https://www.phoenixcontact.com/us/products/2901646



## FL CAT5 PATCH 1,0 - Patch cable

2832276

https://www.phoenixcontact.com/us/products/2832276

Patch cable, CAT5, assembled, 1 m



# FL CAT5 PATCH 1,5 - Patch cable

2832221 https://www.phoenixcontact.com/us/products/2832221



Patch cable, CAT5, assembled, 1.5 m

#### 2901646

https://www.phoenixcontact.com/us/products/2901646



## FL CAT5 PATCH 2,0 - Patch cable

#### 2832289

https://www.phoenixcontact.com/us/products/2832289

Patch cable, CAT5, assembled, 2 m




# FL CAT5 PATCH 3,0 - Patch cable

2832292 https://www.phoenixcontact.com/us/products/2832292



Patch cable, CAT5, assembled, 3 m



https://www.phoenixcontact.com/us/products/2901646



NBC-R4AC-R4AC-IE8A/.../... - Patch cable

#### 1411854

https://www.phoenixcontact.com/us/products/1411854



Patch cable, degree of protection: IP20, number of positions: 8, 10 Gbps,  $CAT6_A$ , cable outlet: straight, Ethernet


## NBC-R4AC/10G-R4AC/10G-94F/2,0 - Patch cable

1408360

https://www.phoenixcontact.com/us/products/1408360



Patch cable,  $CAT6_A$ , 4-pair, shielded, connection not crossed (line), assembled at both ends with RJ45/IP20 connectors, outer sheath material: PUR, length: 2.0 m



https://www.phoenixcontact.com/us/products/2901646



## NBC-R4AC/10G-R4AC/10G-94F/3,0 - Patch cable

#### 1408365

https://www.phoenixcontact.com/us/products/1408365




Patch cable,  $\text{CAT6}_{\text{A}}$ , 4-pair, shielded, connection not crossed (line), assembled at both ends with RJ45/IP20 connectors, outer sheath material: PUR, length: 3.0 m

## NBC-R4AC/1,0-93B/R4AC - Patch cable

1408968 https://www.phoenixcontact.com/us/products/1408968



Patch cable, degree of protection: IP20, cable length: 1 m, number of positions: 4, 100 Mbps, CAT5, material: PA 6.6, PROFINET



https://www.phoenixcontact.com/us/products/2901646



NBC-R4AC/2,0-93B/R4AC - Patch cable

## 1408969

https://www.phoenixcontact.com/us/products/1408969




Patch cable, degree of protection: IP20, cable length: 2 m, number of positions: 4, 100 Mbps, CAT5, material: PA 6.6, PROFINET

## VS-08-RJ45-10G/Q - RJ45 connector

1419001 https://www.phoenixcontact.com/us/products/1419001



RJ45 connector, design: RJ45, degree of protection: IP20, number of positions: 8, 10 Gbps, CAT6<sub>A</sub>, material: Plastic, connection method: Insulation displacement connection, connection cross section: AWG 26- 24, cable outlet: straight, color: black, Ethernet



https://www.phoenixcontact.com/us/products/2901646



VS-CABLE-STRIP-VARIO - Stripping tool

1657407

https://www.phoenixcontact.com/us/products/1657407

Stripping tool, for the multi-level stripping of shielded cables




## VS-08-RJ45-5-Q/IP20 - RJ45 connector

1656725 https://www.phoenixcontact.com/us/products/1656725



RJ45 connector, design: RJ45, degree of protection: IP20, number of positions: 8, 1 Gbps, CAT5, material: Plastic, connection method: Insulation displacement connection, connection cross section: AWG 26- 23, cable outlet: straight, color: traffic grey A RAL 7042, Ethernet



https://www.phoenixcontact.com/us/products/2901646



VS-08-RJ45-5-Q/IP20 BK - RJ45 connector

#### 1658008

https://www.phoenixcontact.com/us/products/1658008



RJ45 connector, design: RJ45, degree of protection: IP20, number of positions: 8, 1 Gbps, CAT5, material: Plastic, connection method: Insulation displacement connection, connection cross section: AWG 26- 23, cable outlet: straight, color: black, Ethernet


## VS-PN-RJ45-5-Q/IP20 - RJ45 connector

1658435

https://www.phoenixcontact.com/us/products/1658435



RJ45 connector, design: RJ45, degree of protection: IP20, number of positions: 4, 100 Mbps, CAT5, material: Plastic, connection method: Insulation displacement connection, cable outlet: straight, color: traffic grey A RAL 7042, PROFINET



https://www.phoenixcontact.com/us/products/2901646



## FL-PP-RJ45-SC - Patch panel

2901643

https://www.phoenixcontact.com/us/products/2901643




Patch panel, one RJ45 jack to 8 screw connection terminal blocks (1:1 assignment), CAT5e, 10/100/1000 Mbps, DIN rail adapter, IP20, option of shield contacting to the DIN rail via jumpers

## FL-PP-RJ45-LSA - Patch panel

2901645 https://www.phoenixcontact.com/us/products/2901645



Patch panel, one RJ45 jack to 8 LSA connection terminal blocks (1:1 assignment), CAT5e, 10/100/1000 Mbps, DIN rail adapter, IP20, option of shield contacting to the DIN rail via bridges



https://www.phoenixcontact.com/us/products/2901646



## FL-PP-RJ45/RJ45 - Patch panel

#### 2901646

https://www.phoenixcontact.com/us/products/2901646



Patch panel, two RJ45 jacks (1:1 assignment), CAT5e, 10/100/1000 Mbps, DIN rail adapter, IP20, option of shield contacting to the DIN rail via jumpers

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com