

43 Material Round Cable Snap-its

Part Number 0199000031

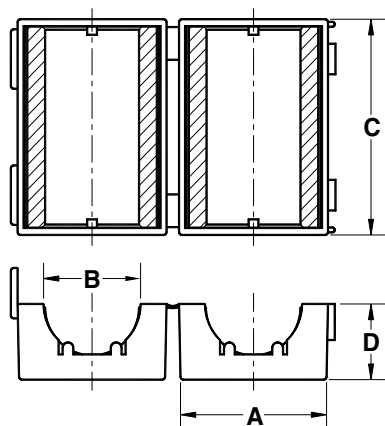


Figure A

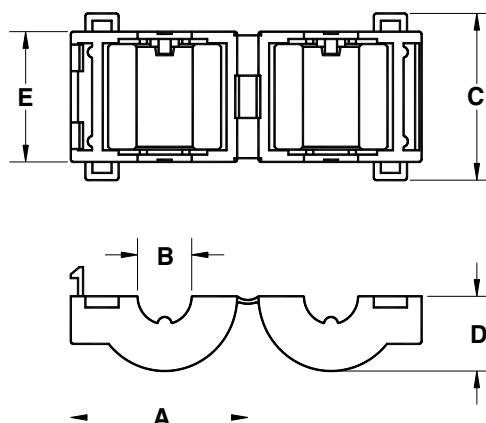


Figure B

Part Number	Fig.	Cable Diameter	A	B*	C	D	E	Typical Impedance(Ω) ¹		Z, R _s , X _L vs. Frequency Curve See back of kit
								25 MHz	100 MHz	
0443164251	A	6.4 Max. .250 Max.	17.9 .705	7.0 .275	32.3 1.272	9.2 .362	-	163	275	Figure 1
0443625006	B	7.6 Max. .300 Max.	24.7 .972	7.9 .311	22.8 .898	10.2 .402	17.8 .701	50	113	Figure 2
0443665806	B	9.3 Max. .365 Max.	26.3 1.035	9.2 .362	21.4 .843	11.0 .433	16.4 .646	41	88	Figure 3
0443167251	A	10.0 Max. .390 Max.	22.1 .870	10.2 .402	32.3 1.272	11.0 .433	-	138	225	Figure 4
0443800506	B	12.7 Max. .500 Max.	29.7 1.169	12.8 .504	20.6 .811	12.7 .500	15.6 .614	35	75	Figure 5
0443164151	A	12.7 Max. .500 Max.	29.0 1.142	13.4 .528	32.5 1.280	14.8 .583	-	156	250	Figure 6
0443806406	B	15.0 Max. .590 Max.	34.3 1.350	15.0 .591	21.2 .835	15.0 .591	16.2 .638	43	90	Figure 7

Dimensions (Bold numbers are in millimeters, light numbers are nominal in inches.)

Cases are polypropylene with a flammability rating of UL 94-V0

* "B" Dimension is the core dimension

¹Guaranteed Z Min is Z Typ -20%

Fair-Rite Products Corp. P.O. Box J, One Commercial Row, Wallkill, NY 12589-0288

Phone: (888) FAIR RITE / (845) 895-2055
(888) 324-7748

FAX: (888) FERRITE / (845) 895-2629
(888) 337-7483

www.fair-rite.com

E-Mail: ferrites@fair-rite.com

43-0702