

LOC		DIST		REVISIONS				
AD	00	F	LTR	DESCRIPTION	DATE	DWN	APVD	
			C	REVISED PER ECO-12-000118	17JAN2012	KH	DD	





D

C

B

A

ROW A
ROW B
ROW C
ROW D
ROW E
ROW F

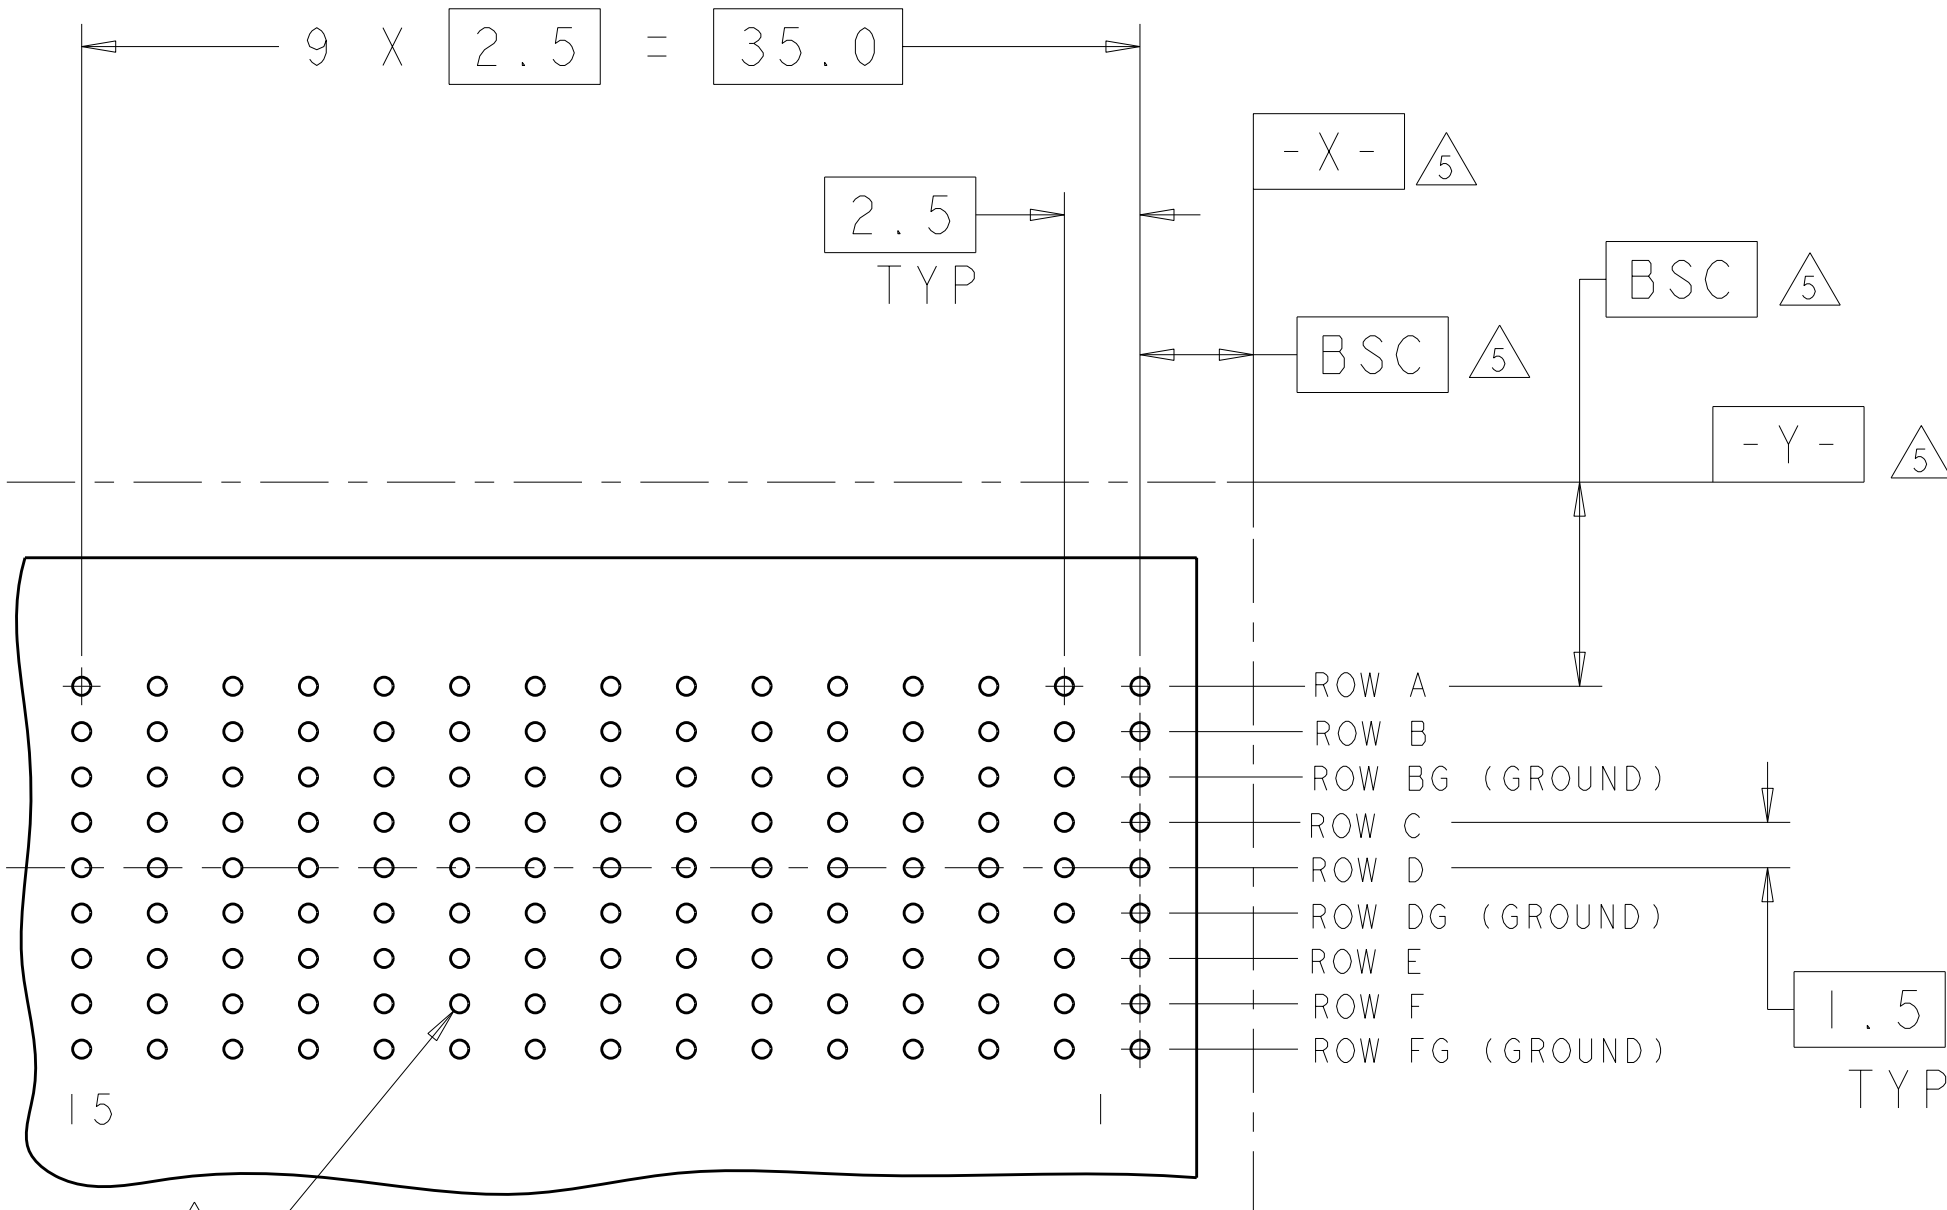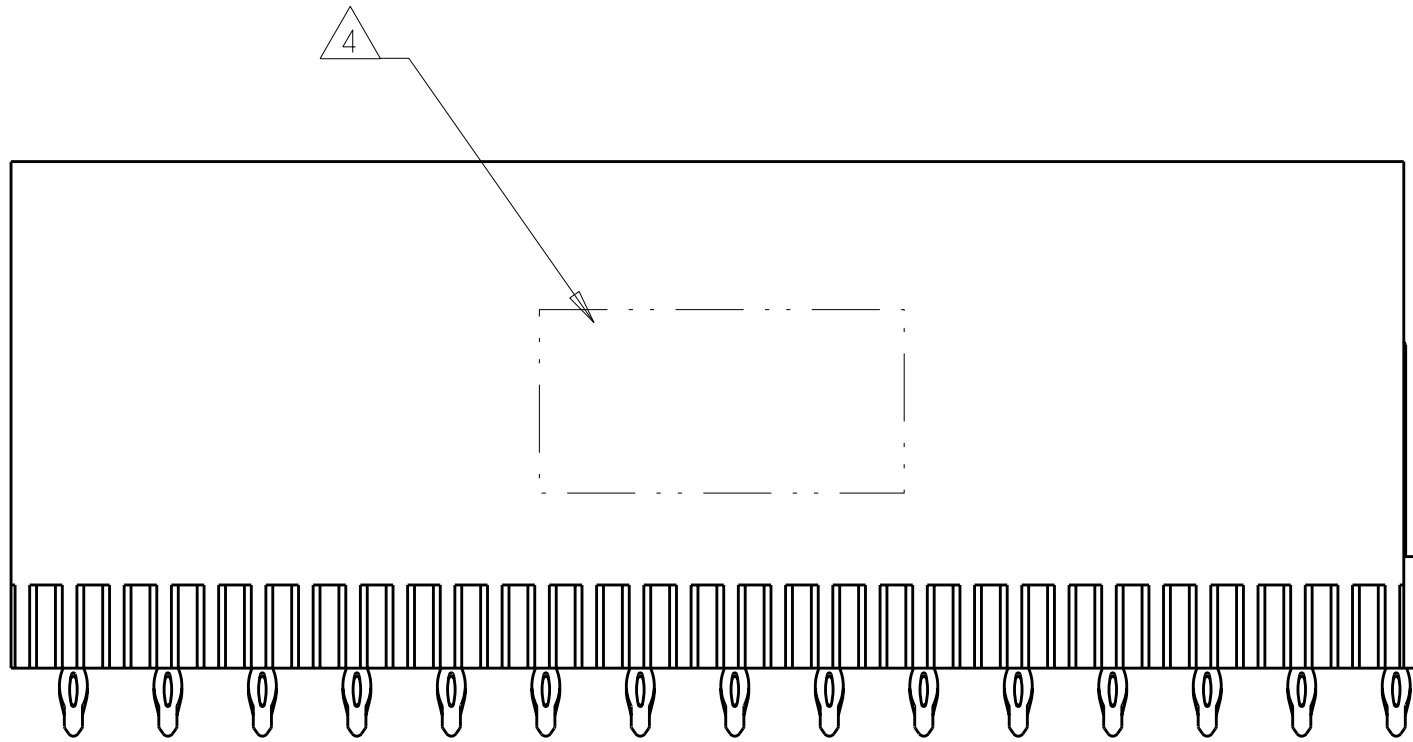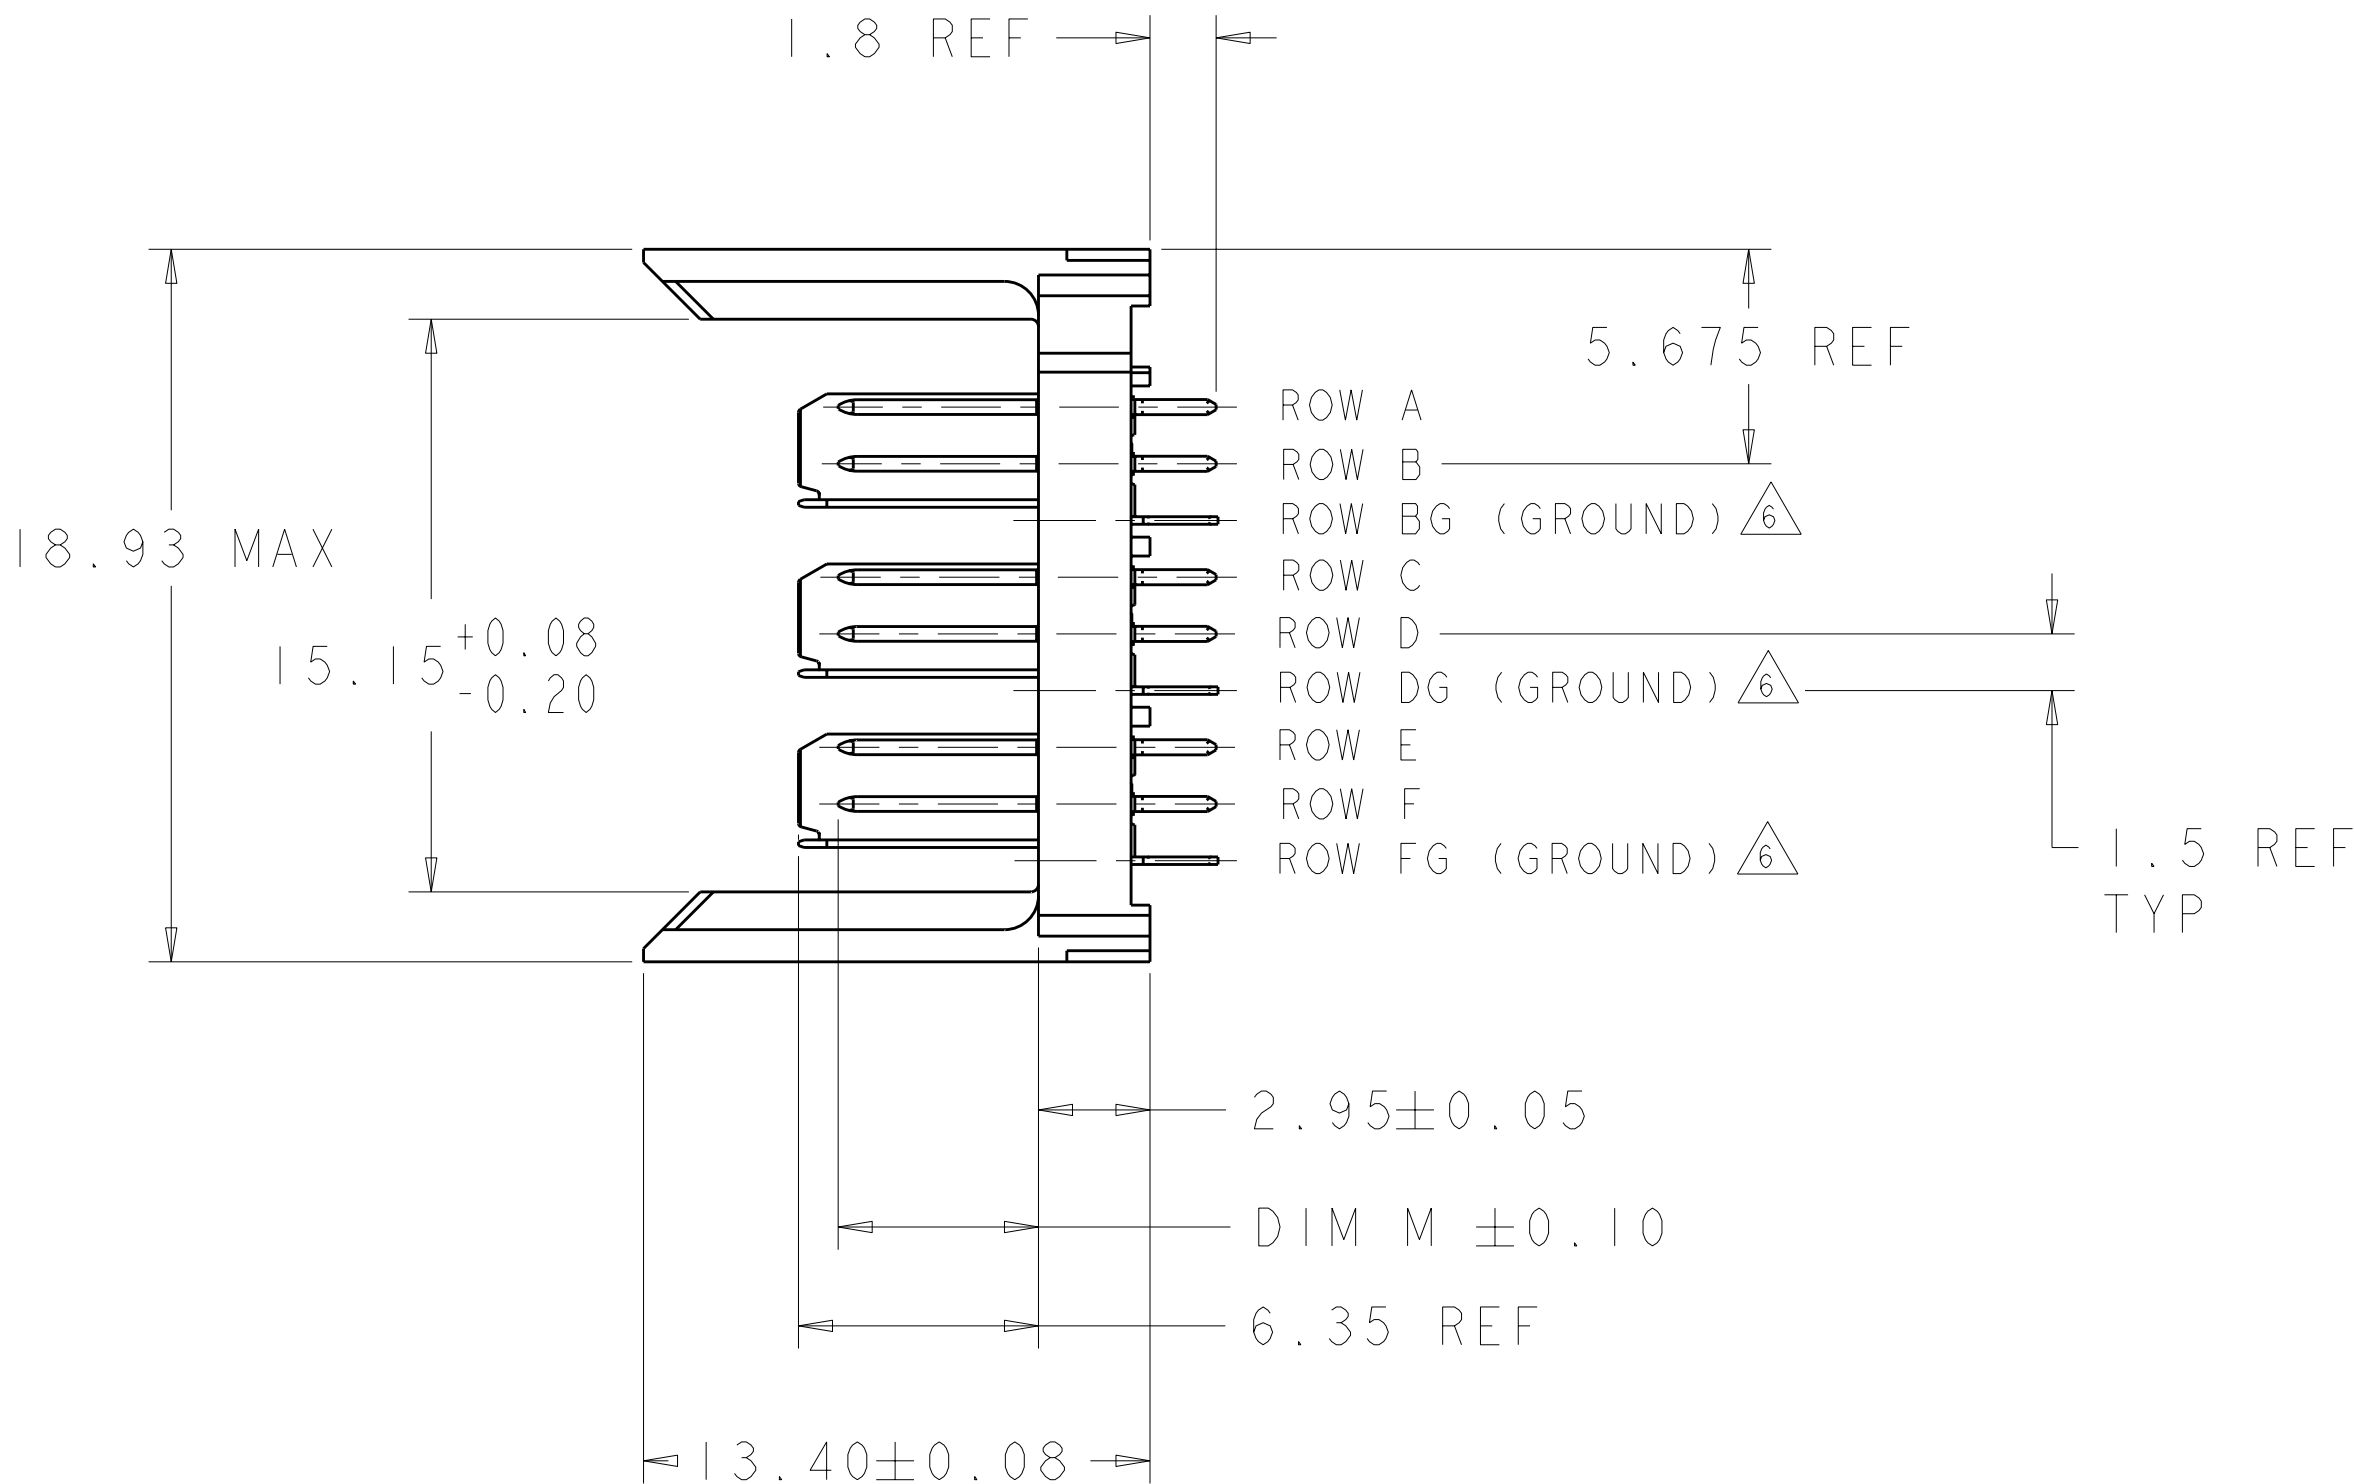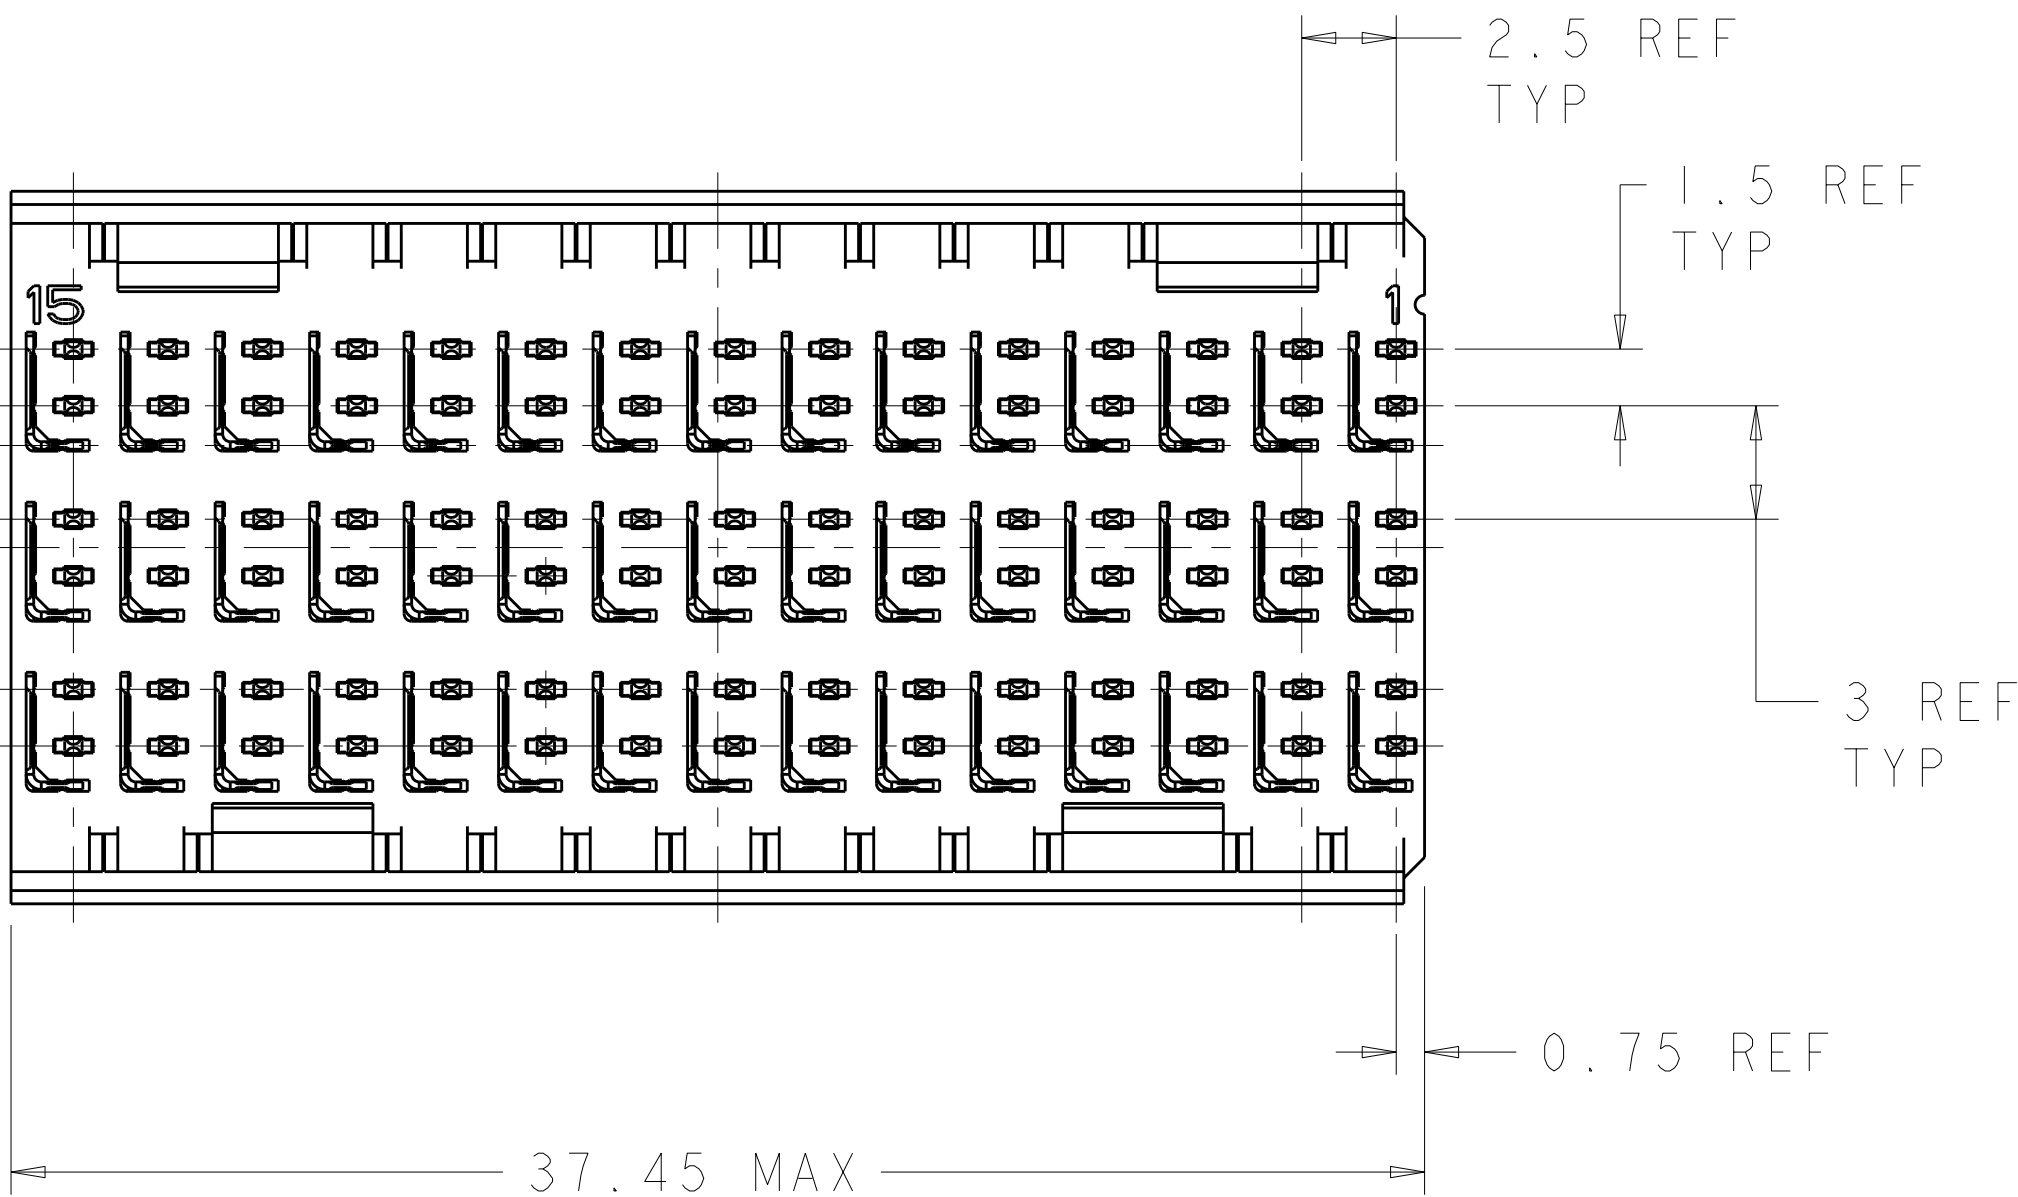

⊕ | Ø0.05 Ⓢ | X | Y
ALL PLATED THRU HOLES

RECOMMENDED PC BOARD LAYOUT, BACKPLANE, COMPONENT SIDE SHOWN
SCALE 4:1

- ⚠ REFERENCE APPLICATION SPEC 114-13059 FOR RECOMMENDED PLATED THROUGH HOLE DIAMETER AND PLATING THICKNESSES.
- ⚠ MATERIAL:
CONTACT AND SHIELD - PHOSPHOR BRONZE
HOUSING - GLASS FILLED POLYESTER, UL 94V-0.
- ⚠ FINISH: SIGNAL AND GROUND CONTACTS:
MATING AREA: MEETS THE PERFORMANCE REQUIREMENTS OF PRODUCT SPECIFICATION 108-2055; BASED ON TELCORDIA GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS
COMPLIANT PIN AREA: 0.5 μm MIN MATTE TIN OVER BASE PLATING
- ⚠ CONNECTOR MARKED WITH PART NUMBER AND DATE CODE.
- ⚠ DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- ⚠ THE THREE GROUNDS IN EACH COLUMN ARE COMMONED.
7. CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995.

5.30	6469154-1
DIM M	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. CARBO	12DEC2006	TE Connectivity	
DIMENSIONS:		CHK R. PATTERSON	12DEC2006		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD R. PATTERSON	12DEC2006	NAME	
	9 PLC ± 3 PLC ± 3 PLC ± 4 PLC ± ANGLES ±	PRODUCT SPEC		HEADER ASSEMBLY, 3 PAIR, 1.8mm TAIL, 37.5mm, HMZd	
MATERIAL	FINISH	APPLICATION SPEC		SIZE	CAGE CODE
⚠	⚠	WEIGHT		A100779	C=6469154
CUSTOMER DRAWING		SCALE		SHEET	OF
		5:1		1	1
				REV	C