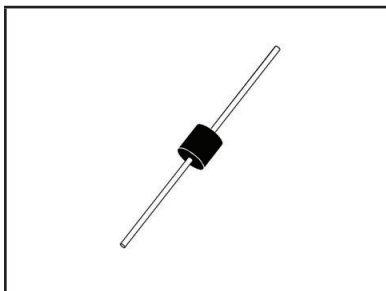


30kW POWER TVS COMPONENT**RTCA DO-160G COMPLIANT PRODUCT****AXIAL LEAD PACKAGE****DESCRIPTION**

The 30KPA Series, are discrete 30,000 Watt, silicon transient voltage suppressors (TVS) designed for use in applications where large voltage transients can permanently damage voltage sensitive components and equipment.

The 30KPA series is available in a large range of voltages. Tolerances are referenced to the power supply output or operating voltage level at $\pm 5\%$. This series is compatible with IEC 61000-4-5 (Surge) requirements.

FEATURES

- **RTCA DO-160G COMPLIANT PRODUCT**
- UL Registered
- Compatible with IEC 61000-4-2 (ESD): Air $\pm 30\text{kV}$, Contact $\pm 30\text{kV}$
- Compatible with IEC 61000-4-5 (Surge): 48A, 8/20 μs - L3(Line-Ground), L4(Line-Line) & L1 (Power)
- 30,000 Watts Peak Pulse Power per Line ($t_p = 10/1000\mu\text{s}$)
- Unidirectional and Bidirectional Configurations
- Easy Mounting to Printed Circuit Board
- tClamping (0V to V_{BR} Min.) $< 1 \times 10^{-12}$ seconds theoretical
- Available in Multiple Voltage
- RoHS Complaint (Exemption #7a & 7c-1)

APPLICATIONS

- Relay Drives
- Motor (Start/Stop) Back EMF Protection
- Module Lightning Protection
- Secondary Lightning Protection for AC/DC

MECHANICAL CHARACTERISTICS

- Molded Case
- Approximate Weight: 2.2 grams
- Lead-Free Pure-Tin Plating (Annealed)
- Solder Reflow Temperature:
Pure-Tin - Sn, 100: 260-270°C
- Flammability Rating UL 94V-0

CIRCUIT DIAGRAMS**UNIDIRECTIONAL****BIDIRECTIONAL**

30kW POWER TVS COMPONENT

RTCA DO-160G COMPLIANT PRODUCT

MAXIMUM RATINGS @ 25°C Unless Otherwise Specified

PARAMETER	SYMBOL	VALUE	UNITS
Peak Pulse Power (tp = 10/1000μs) - See Figure 1	P _{PP}	30,000	Watts
Forward Surge Rating - 1/120 seconds - See Note 2	I _F	200	Amps
Steady State Power Dissipation	P _P	8.0	Watts
Storage Temperature	T _{STG}	-55 to 175	°C
Operating Temperature	T _L	-55 to 175	°C
Typical Thermal Resistance, Junction to Lead	R _{θJL}	8.0	°C/W
Typical Thermal Resistance, Junction to Ambient	R _{θJA}	40	°C/W

ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified

PART NUMBER (Notes 1 - 2)	RATED STAND-OFF VOLTAGE V _{WM} VOLTS	BREAKDOWN VOLTAGE			MAXIMUM LEAKAGE CURRENT @V _{WM} I _D μA	MAXIMUM CLAMPING VOLTAGE (Fig. 2) @ 10/1000μs V _C @ I _{PP}	TEMPERATURE COEFFICIENT OF V _(BR) qV _(BR) mV/°C
		MIN V _(BR) VOLTS	MAX V _(BR) VOLTS	@I _T mA			
30KPA28A	28.0	31.28	34.98	50	5000	50.0V @ 606.0A	32
30KPA30A	30.0	33.3	36.6	50	5000	55.2V @ 543.0A	34
30KPA33A	33.0	36.7	40.4	50	5000	58.6V @ 512.0A	39
30KPA36A	36.0	40.0	44.0	50	2000	61.8V @ 485.0A	41
30KPA39A	39.0	43.6	47.96	20	2000	67.2V @ 450.9A	46
30KPA43A	43.0	47.8	52.6	50	1000	73.0V @ 410.0A	50
30KPA45A	45.0	50.3	55.33	5	250	77.4V @ 391.5A	51
30KPA48A	48.0	53.3	58.6	5	250	77.4V @ 388.0A	56
30KPA51A	51.0	57.00	62.7	5	50	86.4V @ 350.7A	60
30KPA54A	54.0	60.0	66.33	5	20	91.4V @ 331.5A	64
30KPA58A	58.0	64.4	70.8	5	20	92.4V @ 325.0A	68
30KPA64A	64.0	71.1	78.2	5	10	104.0V @ 294.0A	76
30KPA70A	70.0	77.8	85.6	5	2	109.0V @ 274.0A	83
30KPA72A	72.0	80.4	88.4	5	2	114.0V @ 265.0A	85
30KPA75A	75.0	83.3	91.6	5	2	119.4V @ 251.0A	89
30KPA78A	78.0	87.10	95.8	5	2	129.0V @ 234.9A	92
30KPA85A	85.0	94.4	104.0	5	2	139.0V @ 216.0A	105
30KPA90A	90.0	100.0	110.0	5	2	147.0V @ 206.0A	109
30KPA100A	100.0	111.0	122.1	5	2	162.0V @ 186.0A	121
30KPA102A	102.0	114.0	125.29	5	2	166.0V @ 183.0A	124
30KPA110A	110.0	122.0	134.2	5	2	178.0V @ 168.0A	126
30KPA130A	130.0	144.0	158.4	5	2	209.0V @ 142.0A	157
30KPA150A	150.0	167.6	183.7	5	2	233.4V @ 129.8A	195

TYPICAL DEVICE CHARACTERISTICS

RTCA DO-160G COMPLIANT PRODUCT

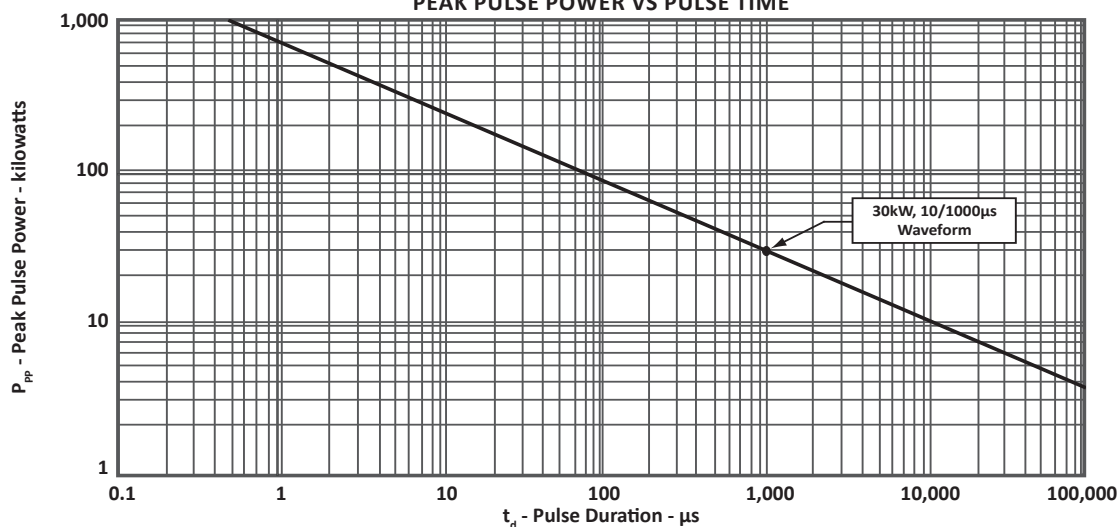
ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified

PART NUMBER (Notes 1 - 2)	RATED STAND-OFF VOLTAGE V_{WM} VOLTS	BREAKDOWN VOLTAGE			MAXIMUM LEAKAGE CURRENT @ V_{WM} I_D μA	MAXIMUM CLAMPING VOLTAGE (Fig. 2) @ 10/1000 μS V_C @ I_{PP}	TEMPERATURE COEFFICIENT OF $V_{(BR)}$ $qV_{(BR)}$ $mV/^{\circ}C$
		MIN $V_{(BR)}$ VOLTS	MAX $V_{(BR)}$ VOLTS	@ I_T mA			
30KPA160A	160.0	178.0	195.8	5	2	252.6V @ 119.0A	195
30KPA170A	170.0	189.0	207.9	5	2	274.0V @ 110.0A	207
30KPA180A	180.0	200.0	220.0	5	2	291.0V @ 104.0A	230
30KPA200A	200.0	222.0	244.2	5	2	320.0V @ 94.0A	250
30KPA216A	216.0	241.3	265.4	5	2	348.0V @ 86.9A	260
30KPA220A	220.0	245.0	269.5	5	2	356.0V @ 84.0A	269
30KPA250A	250.0	277.0	304.7	5	2	404.0V @ 74.0A	314
30KPA260A	260.0	289.0	317.9	5	2	416.0V @ 72.0A	317
30KPA280A	280.0	311.0	342.1	5	2	464.0V @ 65.0A	342
30KPA300A	300.0	334.0	367.4	5	2	484.0V @ 62.0A	368
30KPA320A	320.0	356.0	391.6	5	2	530.0V @ 57.0A	370
30KPA345A	345.0	380.0	418.0	5	2	560.0V @ 53.6A	375
30KPA360A	360.0	400.0	440.0	5	2	640.0V @ 55.0A	380
30KPA400A	400.0	440.0	494.0	5	2	704.0V @ 42.6A	430

NOTES

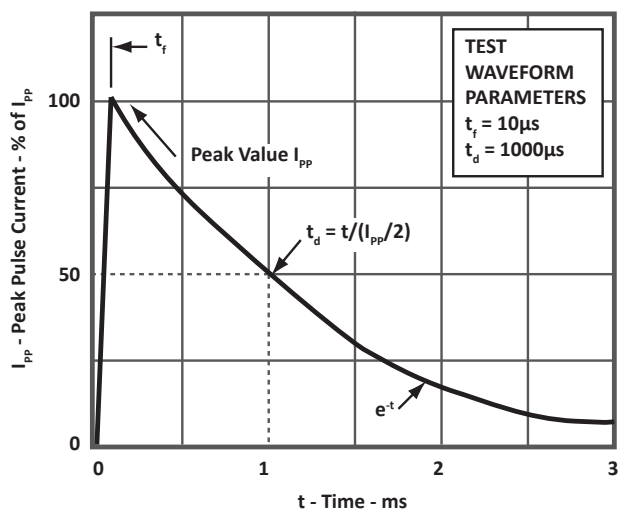
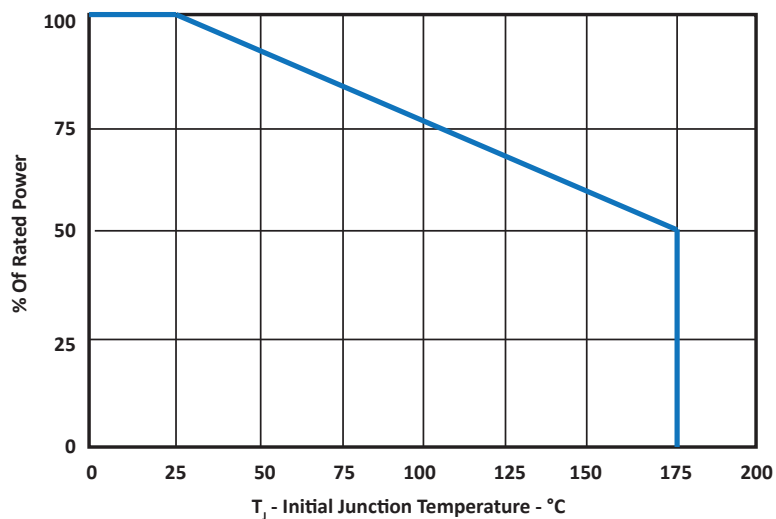
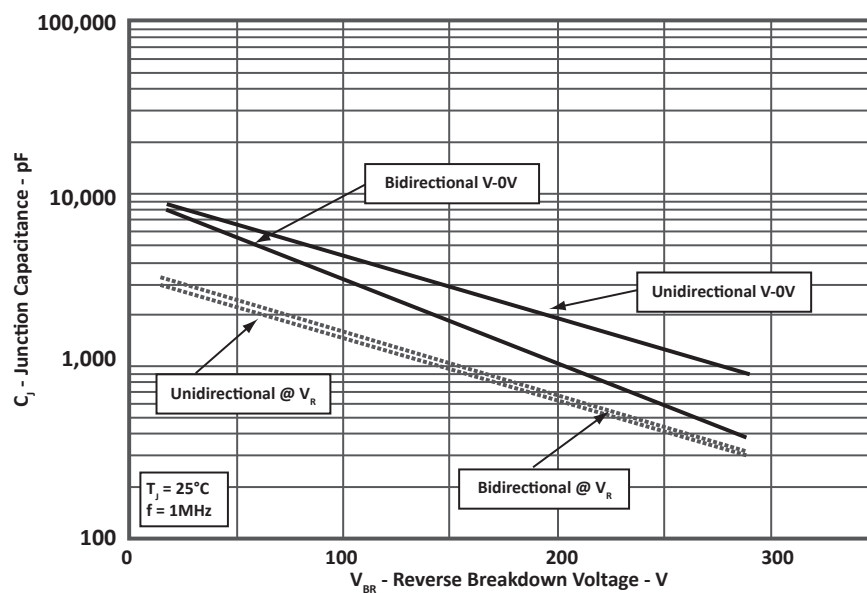
1. Part numbers shown are unidirectional devices. Add a "CA" suffix to specify bidirectional devices, such as 30KPA30CA.
2. $V_F = 15$ Volts @ 200A, 8.3ms(1/2 Sine Wave) - Unidirectional devices only.
3. $\pm 5\%$ tolerance.

FIGURE 1
PEAK PULSE POWER VS PULSE TIME



TYPICAL DEVICE CHARACTERISTICS

RTCA DO-160G COMPLIANT PRODUCT

 FIGURE 2
 PULSE WAVEFORM

 FIGURE 3
 POWER DERATING CURVE

 FIGURE 4
 TYPICAL JUNCTION CAPACITANCE


**TYPICAL DEVICE CHARACTERISTICS**

FIGURE 5
TRANSIENT THERMAL RESISTANCE



AXIAL LEAD PACKAGE INFORMATION

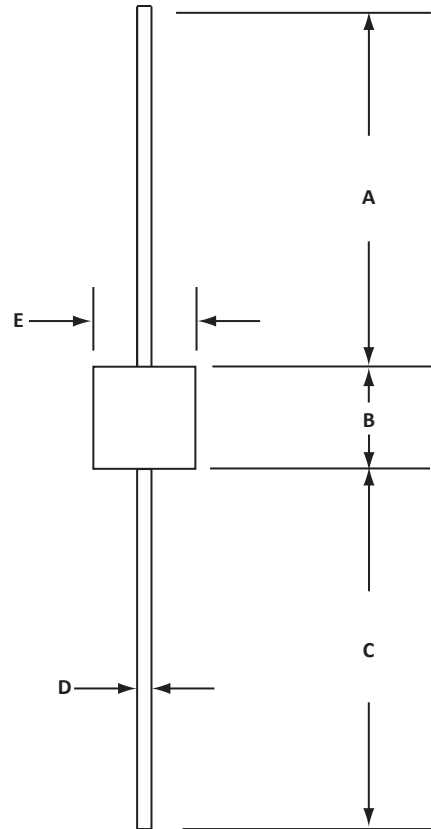
RTCA DO-160G COMPLIANT PRODUCT

OUTLINE DIMENSIONS

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	24.5	-	1.00	-
B	8.60	9.10	0.34	0.36
C	24.5	-	1.00	-
D	1.20 DIA.	1.30 DIA.	0.048 DIA.	0.052 DIA.
E	8.60	9.10	0.34	0.36

NOTES

1. Dimensions are exclusive of mold flash and metal burrs.



ORDERING INFORMATION

BASE PART NUMBER (xx = Voltage)	TERMINAL LEADFREE SUFFIX	TAPE SUFFIX	QTY/REEL	REEL SIZE	TUBE QTY
30KPAxxA	-LF	-T13	800	13"	250
30KPAxxCA	-LF	-T13	800	13"	250

NOTES

- Marking on Part - logo, part number, date code and positive terminal marked with band (unidirectional only).
- Parts come in bulk quantities unless otherwise requested.
- 250 piece minimum order quantity for bulk units and must be divisible by 250.

MARKING DIAGRAM



COMPANY INFORMATION**RTCA DO-160G COMPLIANT PRODUCT****COMPANY PROFILE**

In business more than 25 years, ProTek Devices™ is a privately held semiconductor company. The company offers a product line of overvoltage protection and overcurrent protection components. These include transient voltage suppressor array (TVS arrays) avalanche breakdown diode, steering diode TVS array and electronics SMD chip fuses. These components deliver circuit protection in electronic systems from numerous overvoltage and overcurrent events. They include lightning; electrostatic discharge (ESD); nuclear electromagnetic pulses (NEMP); inductive switching; and electromagnetic interference (EMI) / radio frequency interference (RFI). ProTek Devices also offers LED wafer die for ESD protection and related high frequency products. ProTek Devices is ISO 9001 certified company.

CONTACT US**Corporate Headquarters**

2929 South Fair Lane
Tempe, Arizona 85282
USA

By Telephone

General: 602-431-8101
Sales: & Marketing: 602-414-5109
Customer Service: 602-414-5114
Product Technical Support: 602-414-5107

By Fax

General: 602-431-2288

By E-mail:

Asia Sales: asiasales@protekdevices.com
Europe Sales: europesales@protekdevices.com
U.S. Sales: ussales@protekdevices.com
Distributor Sales: distysales@protekdevices.com
Customer Service: service@protekdevices.com
Technical Support: support@protekdevices.com

ProTek Devices (Asia Pacific) Pte. Ltd.

8 Ubi Road 2, #06-19
Zervex
Singapore - 408538
Tel: +65-67488312
Fax: +65-67488313

Web

www.protekdevices.com

COPYRIGHT © ProTek Devices 2014 - This literature is subject to all applicable copyright laws and is not for resale in any manner.

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice.

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance. ProTek assumes no responsibility with respect to the selection or specifications of such products. ProTek makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ProTek assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability without limitation special, consequential or incidental damages.

LIFE SUPPORT POLICY: ProTek Devices products are not authorized for use in life support systems without written consent from the factory.