



THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND IT'S SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

SK9379						
DATE	REV	REVISION	RECORD	APP	DR	CK
4-21-08	NC	ECO	29304	RCW	YK	COLE

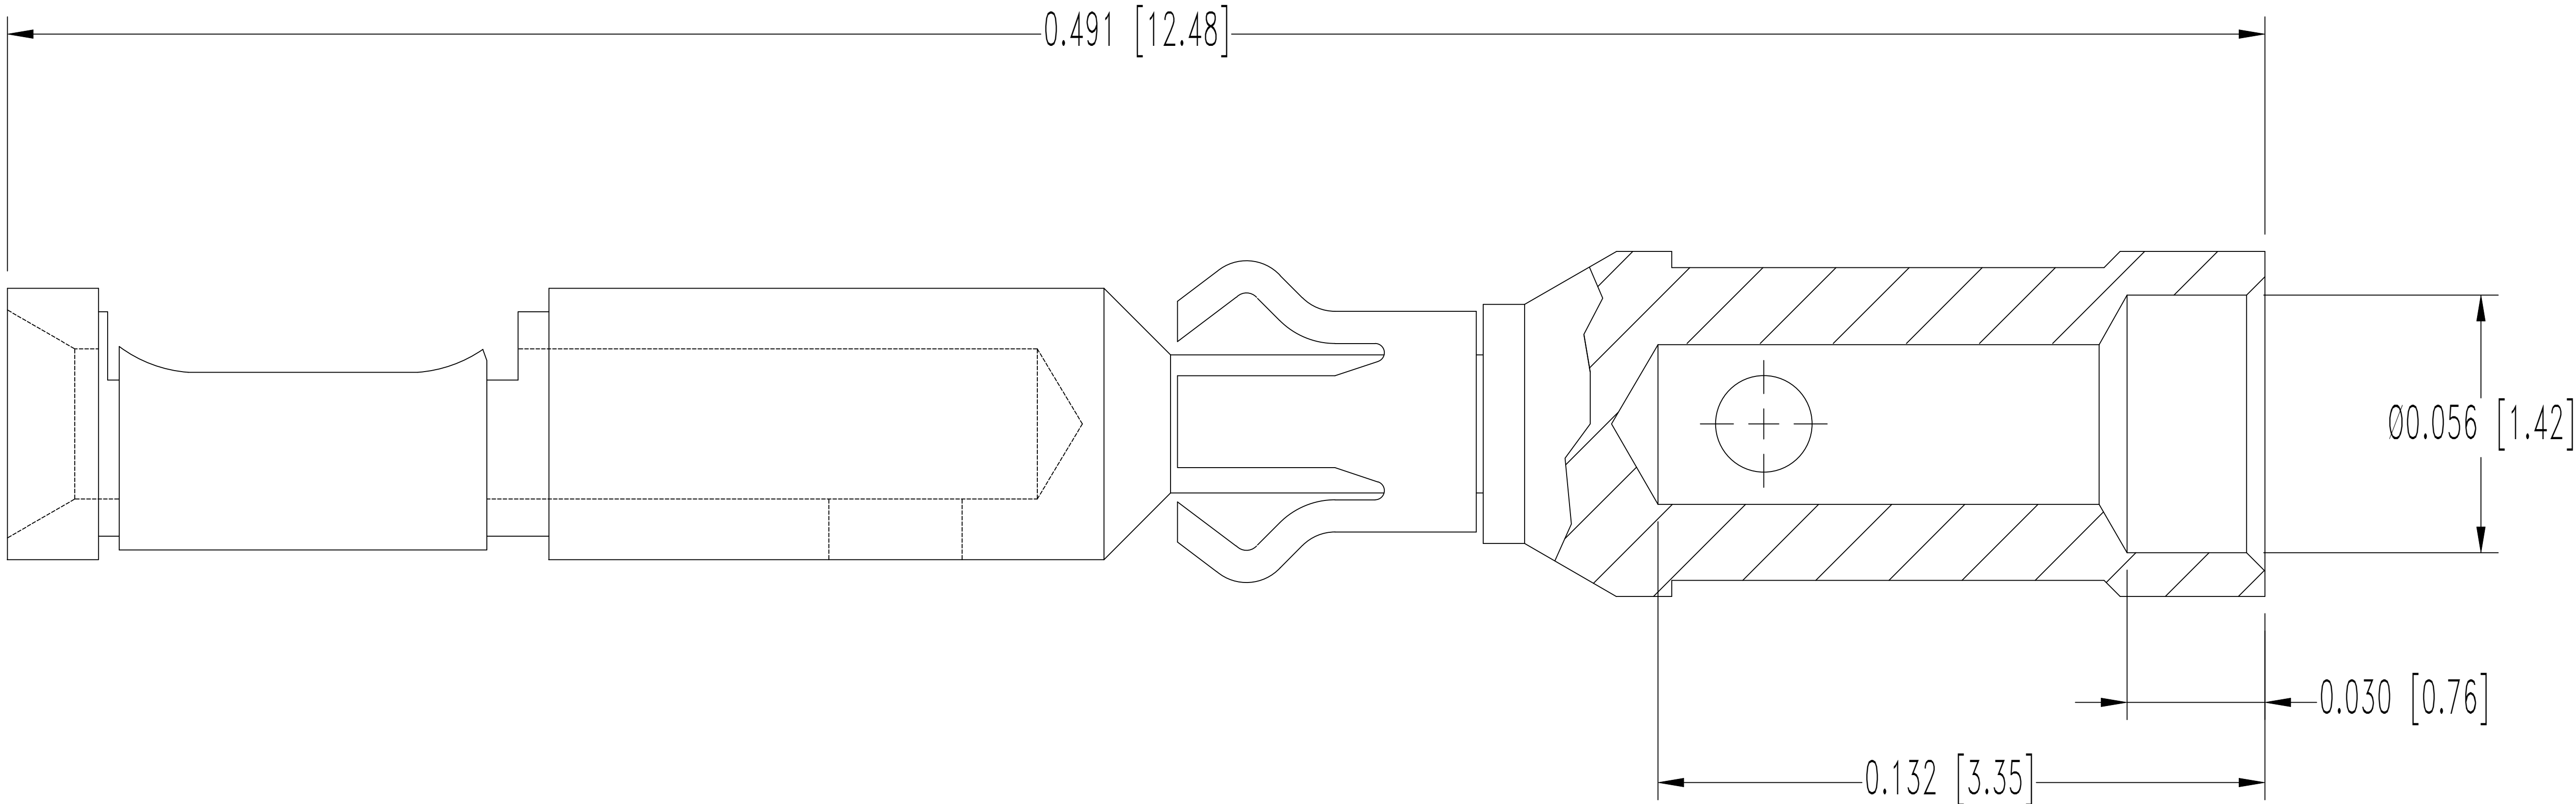

NOTES:

- MATERIALS AND FINISHES:
CONTACT: COPPER ALLOY, GOLD FLASH OVER NICKEL FINISH..
RETAINING RING: BERYLLIUM COPPER, GOLD FLASH OVER NICKEL FINISH.
RETAINING CLIP: BERYLLIUM COPPER, GOLD FLASH OVER NICKEL FINISH.
- ELECTRICAL CHARACTERISTICS:
CONTACT CURRENT RATING: 5 AMPERES NOMINAL.
INITIAL CONTACT RESISTANCE: 0.012 OHMS.
- WORKING TEMPERATURE: -55° TO 135°C.
- DIMENSIONS ARE IN INCHES [MILLIMETERS].

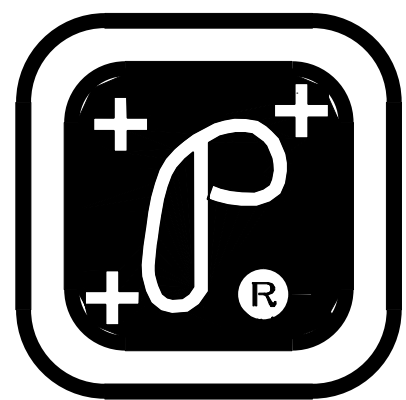

POSITRONIC INDUSTRIES INC.
SPRINGFIELD, MISSOURI 65801

	DECIMAL TOL.
± 0.015 [0.38]	
	ANGULAR TOL.
$\pm 2^\circ$	

PCI SERIES		SCALE	DRAWN BY
		N.T.S.	YK
TITLE		APPROVED BY R WILLIAMS	
		FC422N8	
DATE	DRAWING NUMBER	REV.	
4-21-08	SK9379	NC	