


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND IT'S SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE, SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.


SK10646

DATE	REV	REVISION RECORD	APP	DR	CK
4-29 09	NC	ECO 31006	TK	ME	COLE
1-26 11	A	ECO 33580	COLE	ME	COLE

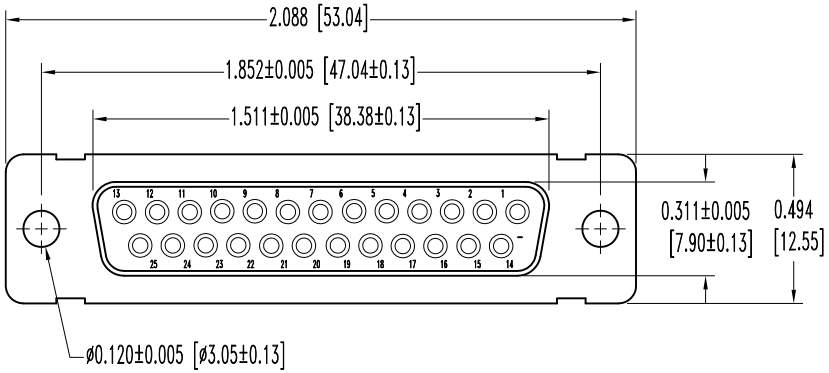

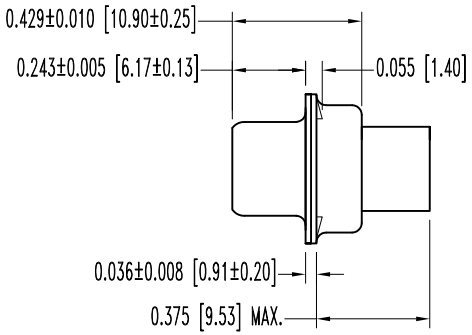

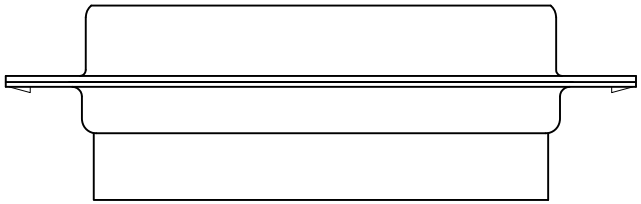

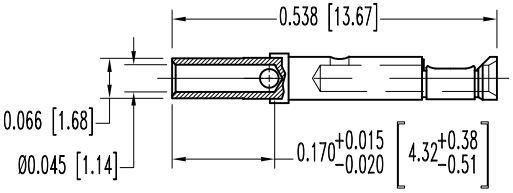

25X FEMALE CONTACT
ENLARGED

NOTES:
1. MATERIALS AND FINISHES:
   INSULATOR: GLASS FILLED DAP PER ASTM-D-5948, SDG-F, UL 94V-0, COLOR GREEN.
   CONTACTS: PRECISION MACHINED COPPER ALLOY GOLD FLASH OVER NICKEL PLATE.
   SHELLS: STAINLESS STEEL, PASSIVATE.
2. DETAILED PRODUCT, ELECTRICAL, AND MECHANICAL INFORMATION IS AVAILABLE IN THE LATEST STANDARD DENSITY D-SUB PRODUCT PUBLICATION. VISIT CONNECTPOSITRONIC.COM/PRODUCTS/45/STANDARDDENSITYD-SUBMINIATURE OR CONNECTPOSITRONIC.COM.
3. DIMENSIONS ARE IN INCHES [MILLIMETERS].

POSITRONIC INDUSTRIES INC.
www.connectpositronic.com
FSCM 28198

DECIMAL TOL. ±0.015 [0.38]
ANGULAR TOL. ±5°

RD SERIES
SCALE N.T.S.
DRAWN BY ME
APPROVED BY T KEPLEY
TITLE RD25S1000S
DATE 4-29-09
DRAWING NUMBER SK10646
REV. A

Downloaded from Arrow.com.