





Operating Temperature Range: -40°C To +105°C

Plating: Tin Plated

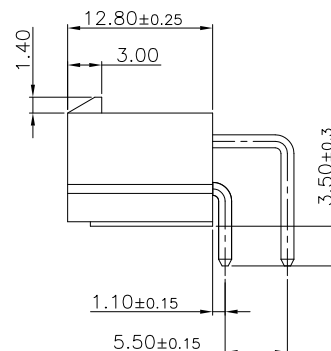


Circuits	Dim A	Dim B	Circuits	Dim A	Dim B
2	—	5.4	14	25.2	30.6
4	4.2	9.6	16	29.4	34.8
6	8.4	13.8	18	33.6	39.0
8	12.6	18.0	20	37.8	43.2
10	16.8	22.2	22	42.0	47.4
12	21.0	26.4	24	46.2	51.6

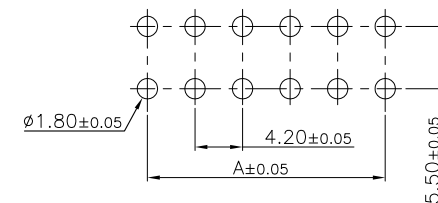


RECOMMENDED P.C.B LAYOUT

RoHS Compliant

A4






				DRAWN:	GENERAL TOLERANCE:  .X=±0.40 .XX=±0.30	<div>CnC Tech</div> <div>Industrial Cable and Connector Technology</div>		SIZE  A4
				APPROVAL:	SCALE:1:1	PART NO: 4282-1-0200-XX-SP		
					SHEET: 2 / 4			
					PROJECTION: 			
REV	DATE	FILE	BY					


D




4282-1-0200-XX-SP



COVER TRAY




BOTTOM TRAY




TRAY

(30)





18TRAYS

(262)



CARTON

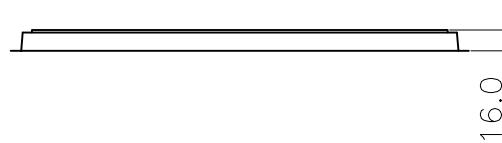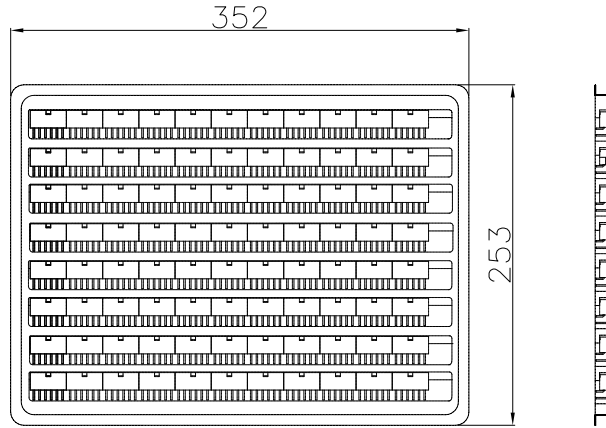

Note:

1.Dimension:

Tray Size:352(L)x253(W)x16(H) (mm)

Carton Size:360(L)x270(W)x300(H) (mm)

2.Quantity:

18 Tray/Carton

Pin	PCS/Tray	Tray/Carton	PCS/Carton
4	248	18	4464
6	176	18	3168
8	136	18	2448
10	112	18	2016
12	88	18	1584
14	80	18	1440
16	72	18	1296
18	64	18	1152
20	56	18	1008
22	48	18	864
24	48	18	864

				DRAWN:	GENERAL TOLERANCE:  .X=±0.2 .XX=±0.15	<div>CnC Tech</div> <div>Industrial Cable and Connector Technology</div>		D
			CHECKED:	UNIT: MM	DESCRIPTION:  CONN HEADER R/A DUAL 94V-0 PACKING	SIZE  A4		
				SCALE:				
			APPROVAL:	SHEET: 4 / 4	PART NO:  4282-1-0200-XX-SP			
REV	DATE	FILE		BY		PROJECTION:		