



Features

- Fully integrated miniature module
 - Emitter: 940 nm invisible vertical cavity surface emitting laser (VCSEL) and integrated analog driver
 - 61 ° diagonal square system field of view (FoV) using diffractive optical elements (DOE) on both transmitter and receiver
 - Receiving array of single photon avalanche diodes (SPADs) in both transmitter and receiver apertures
 - Low-power microcontroller running firmware
 - Size: 6.4 x 3.0 x 1.5 mm
- Fast, accurate distance ranging
 - Parallel multi zone output; either 4x4 or 8x8 separate regions of interest (ROI)
 - Up to 400 cm ranging
 - 60 Hz frame rate capability
 - Histogram processing and algorithmic compensation minimizes or removes impact of cover glass crosstalk
 - Fully autonomous device with on-board histogram and ranging processing running on ST in-house 32Bit MCU

- Dynamic crosstalk compensation for fingerprint smudge via latest patented ToF techniques
- Easy integration
 - Flexible power supply options, single 3.3 V or 2.8 V operation or combination of either 3.3 V or 2.8 V AVDD with 1.8 V IOVDD
 - Compatible with wide range of cover glass materials
 - I²C or SPI interface
 - Low-power pin and two general purpose inputs (GPIOs) for interrupt and synchronization
 - Full set of software drivers (Linux and Android compatible) for turnkey

Applications

- Laser assisted autofocus (LAF). Enhances the camera AF system speed and robustness especially in difficult low light or low contrast scenes. Ideal companion for phase detection autofocus (PDAF) sensors.
- Scene understanding. Multi-zone and multi-object distance detection enables touch-to-focus or focus bracketing for best shot selection.
- Camera assist. Further camera assistance by enabling flash dimming, indoor/outdoor detection and background removal assist
- Augmented reality/virtual reality (AR/VR) enhancement. Dual camera stereoscopy and 3D depth assistance thanks to multi zone distance measurement
- Video focus tracking. 60 Hz ranging allows optimization of continuous focus algorithm

Description

The VL53L5 is a state of the art, Time-of-Flight (ToF), laser-ranging sensor enhancing the ST FlightSense product family.

Housed in a miniature reflowable package, it integrates a SPAD array, physical infrared filters, and diffractive optics (DOE) to achieve the best ranging performance in various ambient lighting conditions with a range of cover glass materials.

The use of a DOE above the vertical cavity surface emitting laser (VCSEL) allows a square FoV to be projected onto the scene. The reflection of this light is focused by the receiver lens onto a SPAD array.

The VL53L5 uses ST's latest generation, direct ToF technology which allows absolute distance measurement whatever the target color and reflectance. It provides accurate ranging up to 400 cm and its 32bit MCU with extra HW accelerator can post-process the histogram and stream a ready to use depth information at fast speeds (60Hz), which makes it the fastest, multi-point, miniature ToF sensor on the market.

With patented algorithms and ingenious module construction, the VL53L5 is also able to detect different objects within the FoV with depth information at 60 Hz.

Scene browsing and multi zone detection is possible with the VL53L5 thanks to a software customizable detection array to achieve a quicker touch-to-focus or mini depth map.

Technical specification

Figure 1. VL53L5 Module

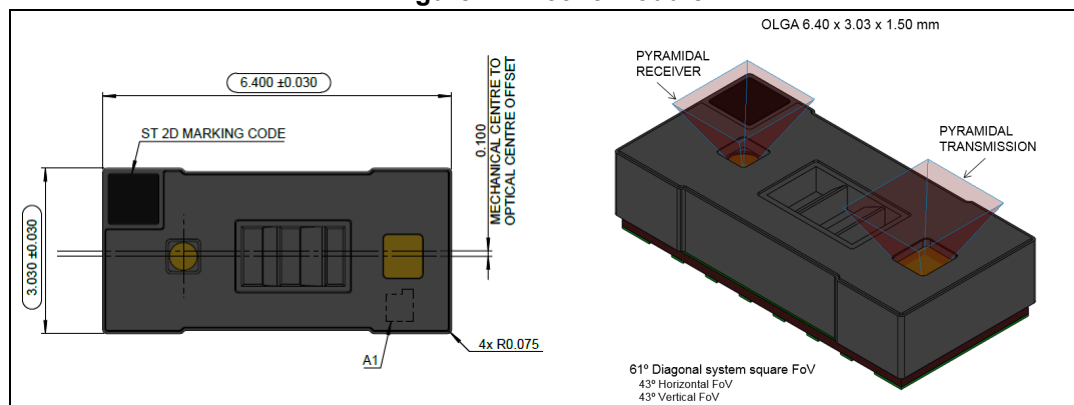


Figure 2. VL53L5 Pinout


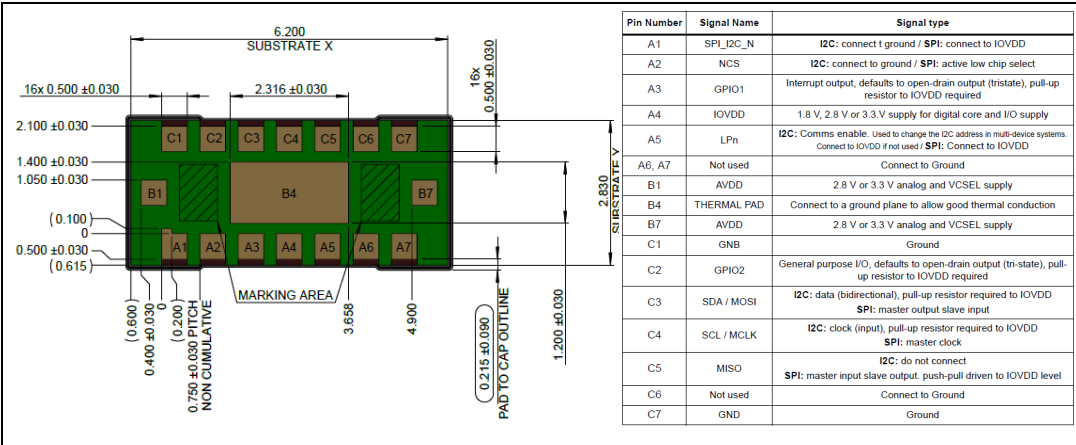


Figure 3. VL53L5 Electrical Schematics examples

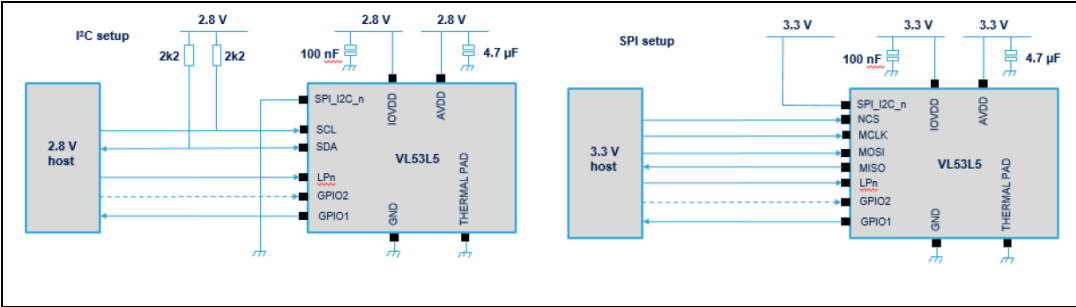

Ordering information

Table 1. Ordering information

Sales type	Package	Packing
VL53L5CAV0GC/1	Optical LGA16 with liner	Tape and reel (with liner)

ECOPACK®

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: www.st.com. ECOPACK® is an ST trademark.

Revision history

Table 2. Document revision history

Date	Revision	Changes
11-Jan-2018	1.0	Initial release
19-Oct-2020	1.1	Update

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2020 STMicroelectronics – All rights reserved