

Inductors (Coils)

Product Top Page

Search by Part No.

Search by Characteristics

Cross Reference

Catalog

Tech Notes

Technical Support Tools

FAQ

MLZ2012E100MT000



Applications



Commercial Grade

Feature

Shield

Magnetic Shield

Multilayer

Multilayer

Ferrite Core

Ferrite Core

Series | Type MLZ

Status



Production (Not Recommended for New Design)

Recommended Alternate Part No. : [MLZ2012M100WT000](#)

Brand

TDK



Images are for reference only and show exemplary products.

PDF file of this page



Contact



Documents

Product Lineup

Size

Length(L)	2.00mm ±0.20mm
Width(W)	1.25mm ±0.20mm
Thickness(T)	1.25mm ±0.20mm
Recommended Land Pattern (A)	0.80mm Nom.
Recommended Land Pattern (B)	1.00mm Nom.
Recommended Land Pattern (C)	1.20mm Nom.

Electrical Characteristics

Inductance	10μH ±20% at 2MHz
Rated Current (L Change) [Typ.]	
Rated Current (L Change) [Max.]	60mA (50% Down)
Rated Current (Temperature Rise) [Typ.]	60mA (20°C Rise)
Rated Current (Temperature Rise) [Max.]	60mA (20°C Rise)
DC Resistance [Typ.]	400mΩ
DC Resistance [Max.]	520mΩ
Self Resonant Frequency [Min.]	
Self Resonant Frequency [Typ.]	
Q [Min.]	
Q [Typ.]	

Other








Operating Temp. Range (Including Self-Temp. Rise)	-55 to 125°C
Soldering Method	Wave (Flow) Reflow Iron Soldering
AEC-Q200	No
Packing	Blister (Plastic)Taping [180mm Reel]
Package Quantity	2000pcs
Weight	0.014g

Characteristic Graph (This is reference data, and does not guarantee the products characteristics.)

Impedance

Rac

10k

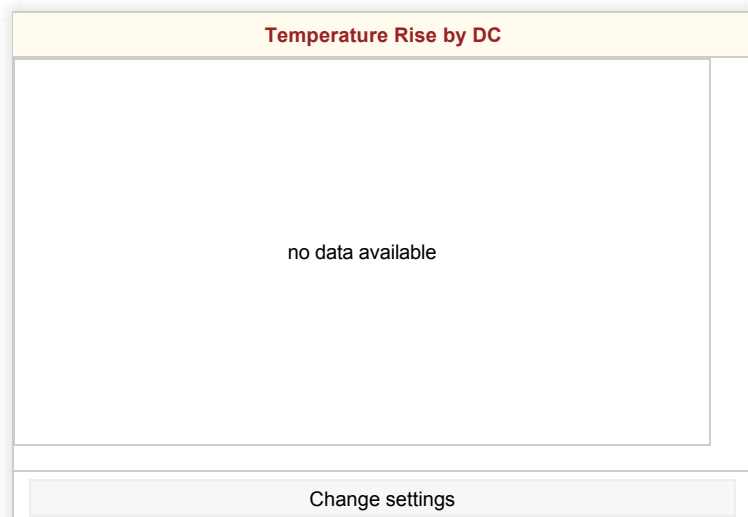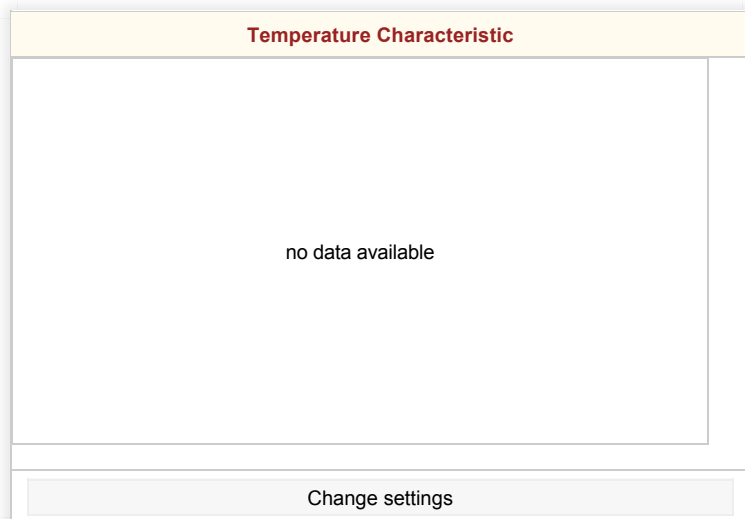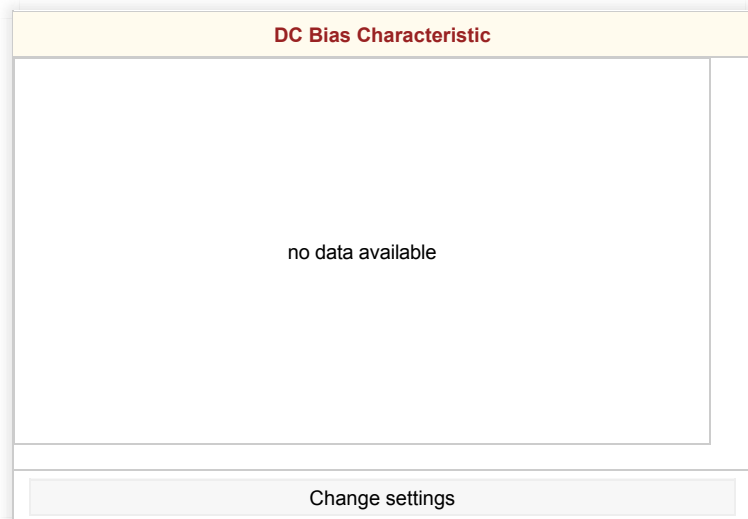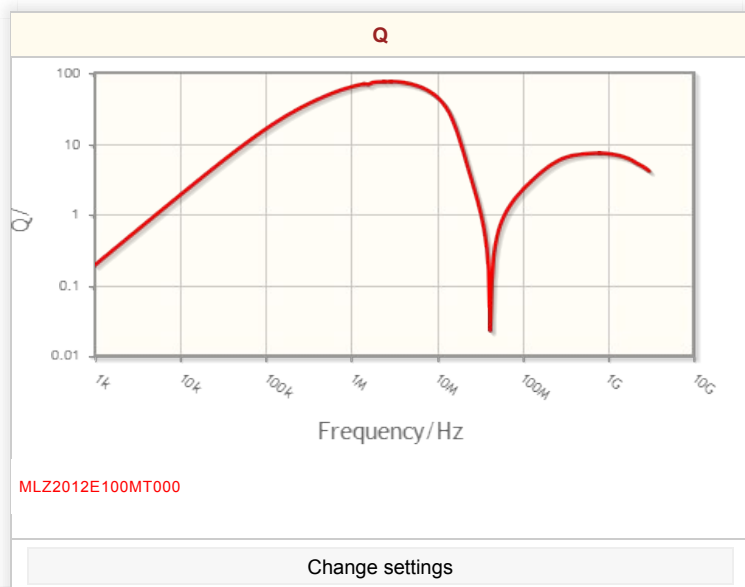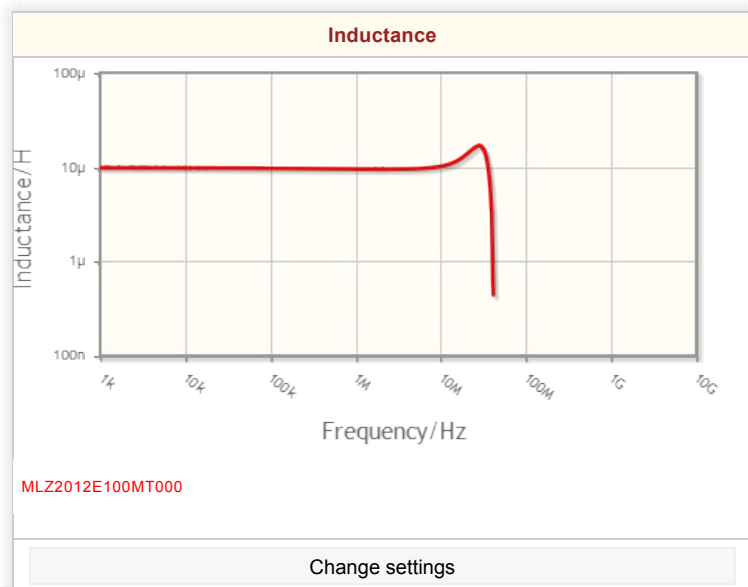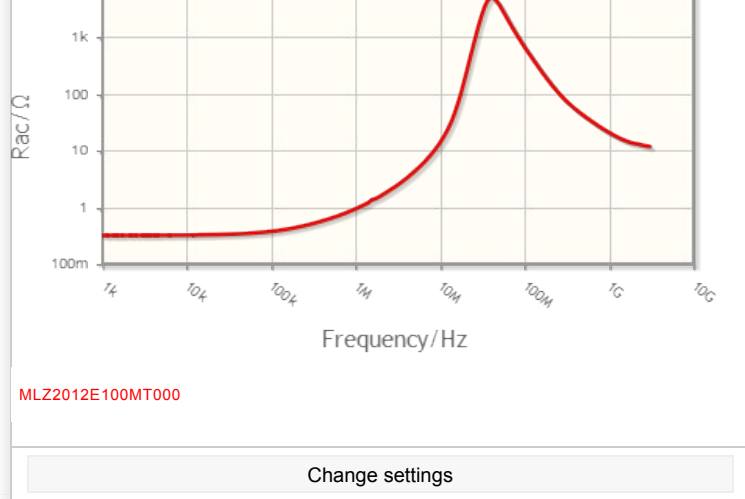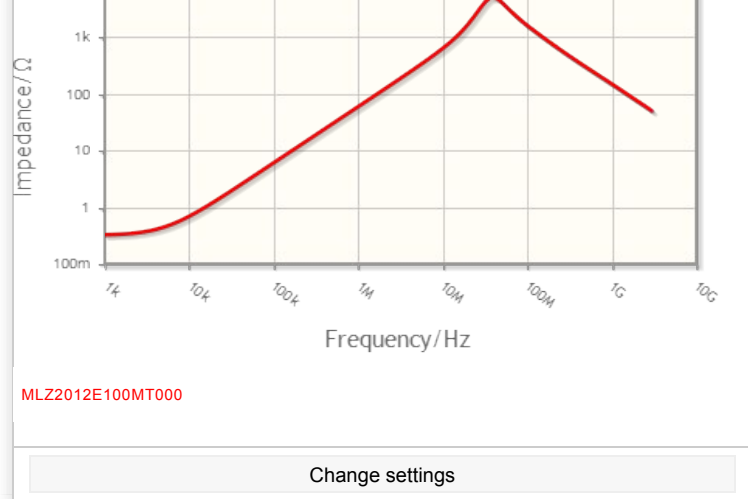

Products

» [Search by Part No.](#) » [Search by Characteristics](#) » [Distributor Inventory Check](#)

- | | |
|--|---|
| » Capacitors | » Anechoic Chambers and Radio Wave Absorbers |
| » Inductors (Coils) | » Power Supplies |
| » EMC Components | » Magnets |
| » RF Components and Modules | » Flash Storages |
| » Voltage / Current / Temperature Protection Devices | » Wireless Power Transfer |
| » Sensors and Sensor Systems | » FA Systems |
| » Ceramic Switching / Heating, Piezo Components, | » Transparent Conductive Film |
| Buzzers and Microphones | » Micro Modules (Substrates with Built-in ICs, Products Utilizing with SESUB) |
| » Transformers | » Solar Cells |
| » Ferrites and Accessories | » Biosensor |
| » Noise Suppressing / Magnetic Sheet | |

Application Guides

Technical Support

Tech Library

Environment

Contact

News

Home



About TDK



TDK Worldwide

[Terms of Use](#) [Privacy Policy](#)

Copyright(c) 1996-2017 TDK Corporation. All rights reserved.
TDK logo is a trademark or registered trademark of TDK Corporation.

