

5



4

3



2

1

Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75301-802

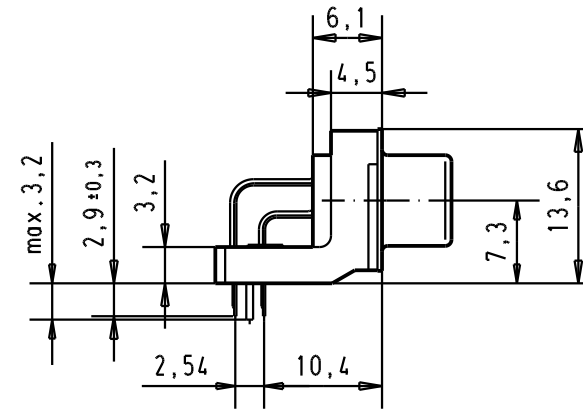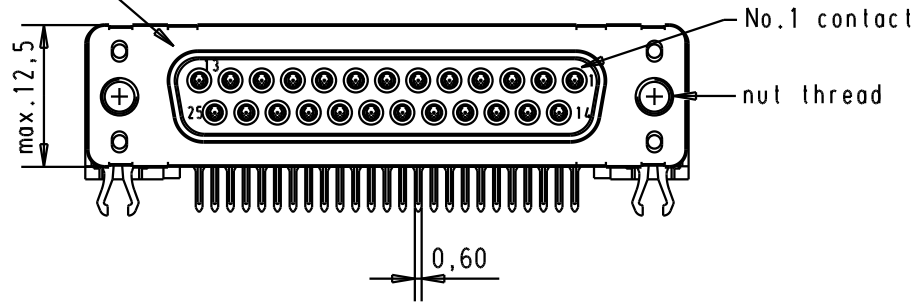

Printed board layout
component side

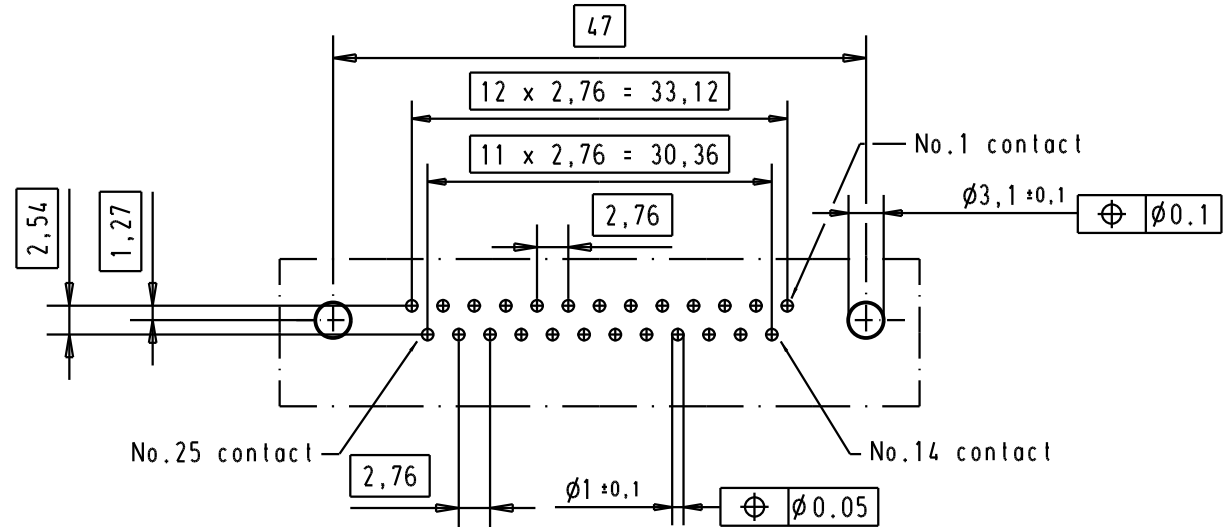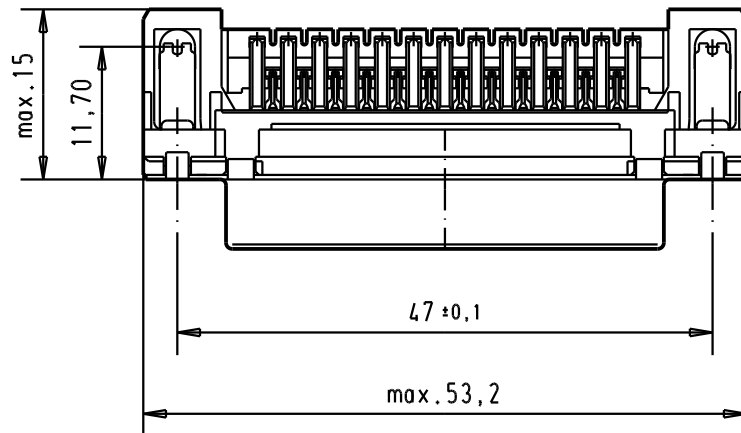

Connector retention and insertion forces on the PCB = 25 / 80 newtons

A

09 66 356 3611	M 3	1					Dat.	Name	 All Dim. in mm Orig. Size DIN A 4	D-Sub , High temperature, female, standard, 25 poles with solder pins 2,9mm, nuts and grounding board lock	Maßstab/ Scale 1.5:1
09 66 356 6611	M 3	2					Detail.	15-FEB-02			
09 66 356 7611	M 3	3					Insp.				
09 66 356 3612	4-40 UNC	1	31892	05/05/04	JH		Stand.				
09 66 356 6612	4-40 UNC	2	29723	05-MAR-02	CV	HARTING EURL F-95972 Paris				TB 0966356x61x	Blatt/ Page 1 /
09 66 356 7612	4-40 UNC	3	29750	15-FEB-02	JB						
Part number	Nut thread	Performance level	Mod.	Dat.	Name						



TB 0966356x61x

1 /