

**SURFACE MOUNT
SCHOTTKY BARRIER DIODE**

**REVERSE VOLTAGE – 40 Volts
FORWARD CURRENT – 0.2 Ampere**


FEATURES

- Extremely Fast Switching Speed
- Low Forward Voltage
- Very Small Conduction Losses

MECHANICAL DATA

- Case: SOT-23 Plastic
- Case Material: “Green” molding compound, UL flammability classification 94V-0, (No Br. Sb. Cl)
- Moisture Sensitivity: Level 1 per J-STD-020D
- Lead Free in RoHS 2002/95/EC Compliant

SOT-23



SOT-23		
Dim.	Min.	Max.
A	0.90	1.15
A1	0.00	0.10
b	0.30	0.50
c	0.08	0.15
D	2.80	3.00
E	2.25	2.55
E1	1.20	1.40
e	0.95 Typ.	
e1	1.80	2.00
L	0.55 Ref.	
L1	0.30	0.50
Dimensions in millimeter		

Maximum Ratings & Thermal Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Characteristic	Symbol	BAS40	BAS40-04	BAS40-05	BAS40-06	Units
Repetitive Peak Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	40				V
Forward Continuous Current	I_{FM}	200				mA
Forward Surge Current @ $t < 1.0\text{s}$	I_{FSM}	600				mA
Power Dissipation	P_D	200				mW
Thermal Resistance Junction to Ambient	$R_{\theta JA}$	625				$^\circ\text{C}/\text{W}$
Operating Temperature Range	T_J	125				$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-65~+125				$^\circ\text{C}$

Electrical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Characteristic	Test Condition	Symbol	BAS40	BAS40-04	BAS40-05	BAS40-06	Unit
Reverse Breakdown Voltage	$I_R = 10\mu\text{A}$	V_{BR}	40				V
Maximum Forward Voltage	$I_F = 1\text{mA}$ $I_F = 40\text{mA}$	V_F	380 1000				mV
Maximum DC Reverse Current at Rated DC Blocking Voltage	$V_R = 30\text{V}$	I_R	200				nA
Typical Diode Capacitance	$V_R = 1.0\text{V}, f = 1\text{MHz}$	C_D	5				pF
Reverse Recovery time	$I_{RR} = 1\text{mA}$, $I_R = I_F = 10\text{mA}$ $RL = 100\Omega$	t_{rr}	5				nS

REV. 3, Oct-2010, KSHR10

RATING AND CHARACTERISTIC CURVES

BAS40, BAS40-04 thru -06

FIG.1- TYPICAL FORWORD CHARACTERISTICS

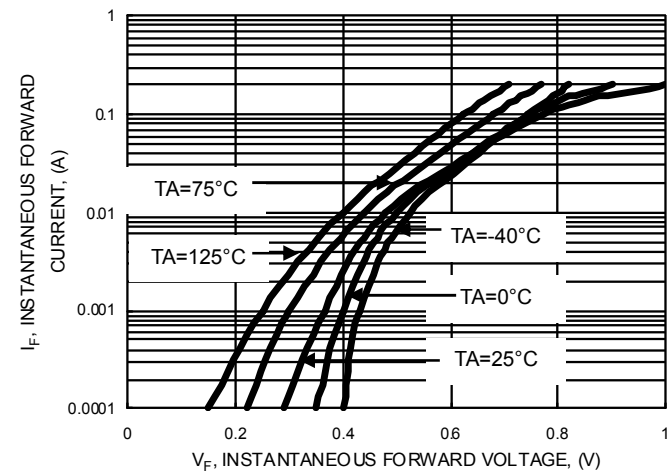


FIG.2- TYPICAL REVERSE CHARACTERISTICS

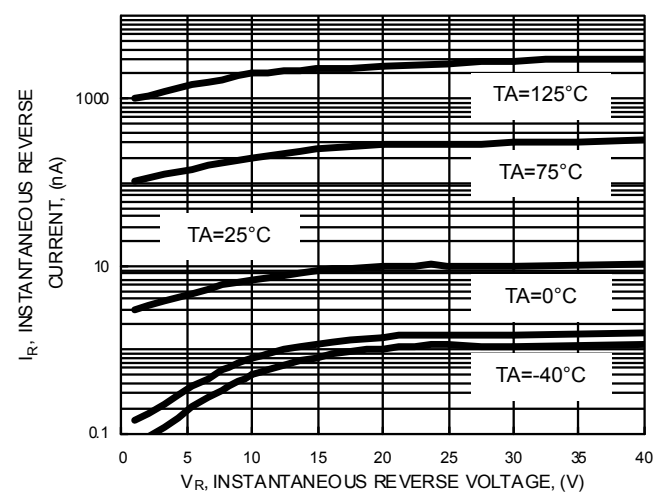


FIG.3- TYPICAL JUNCTION CAPACITANCE


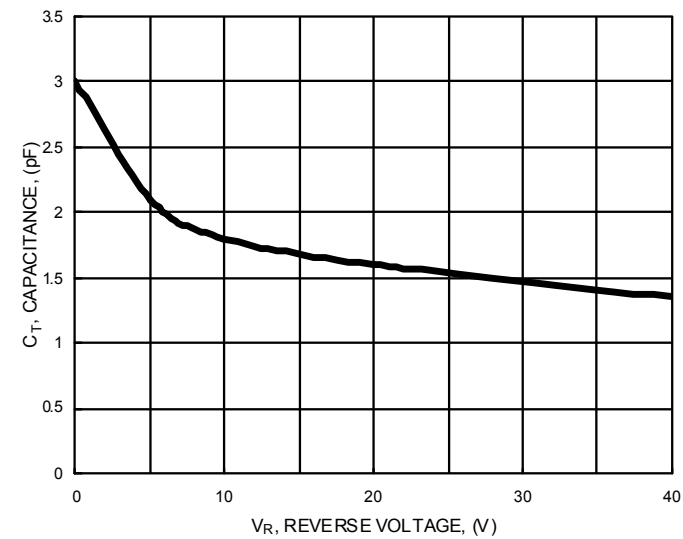


FIG.4- POWER DERATING CURVE

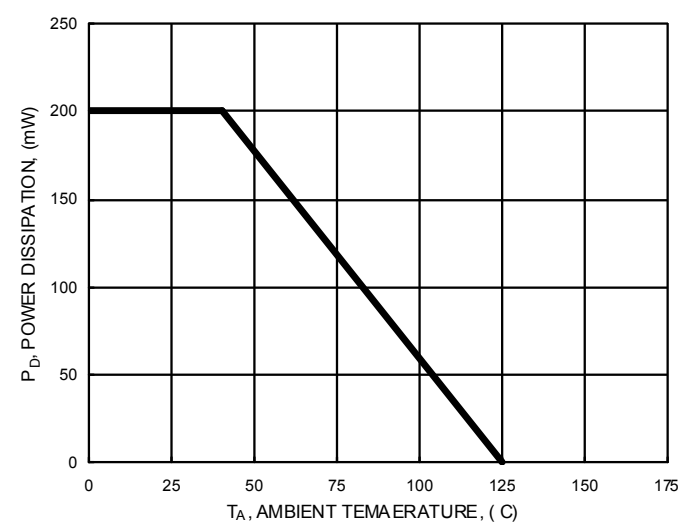

Device Marking :

Device P/N	Marking	Equivalent Circuit Diagram
BAS40	43	
BAS40-04	44	
BAS40-05	45	
BAS40-06	46	

Important Notice and Disclaimer

LSC reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

LSC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does LSC assume any liability for application assistance or customer product design. LSC does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of LSC.

LSC products are not authorized for use as critical components in life support devices or systems without express written approval of LSC.