
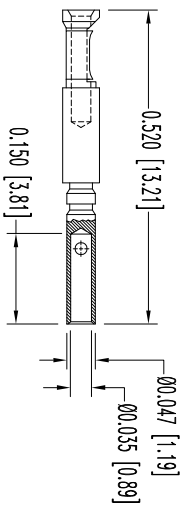


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO CONNECT POSITRONIC, INC. AND IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM. THE DATA ON THIS DRAWING IS GIVEN FREE OF CHARGE. SINCE THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION, CONNECT POSITRONIC, INC. ASSUMES NO LIABILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

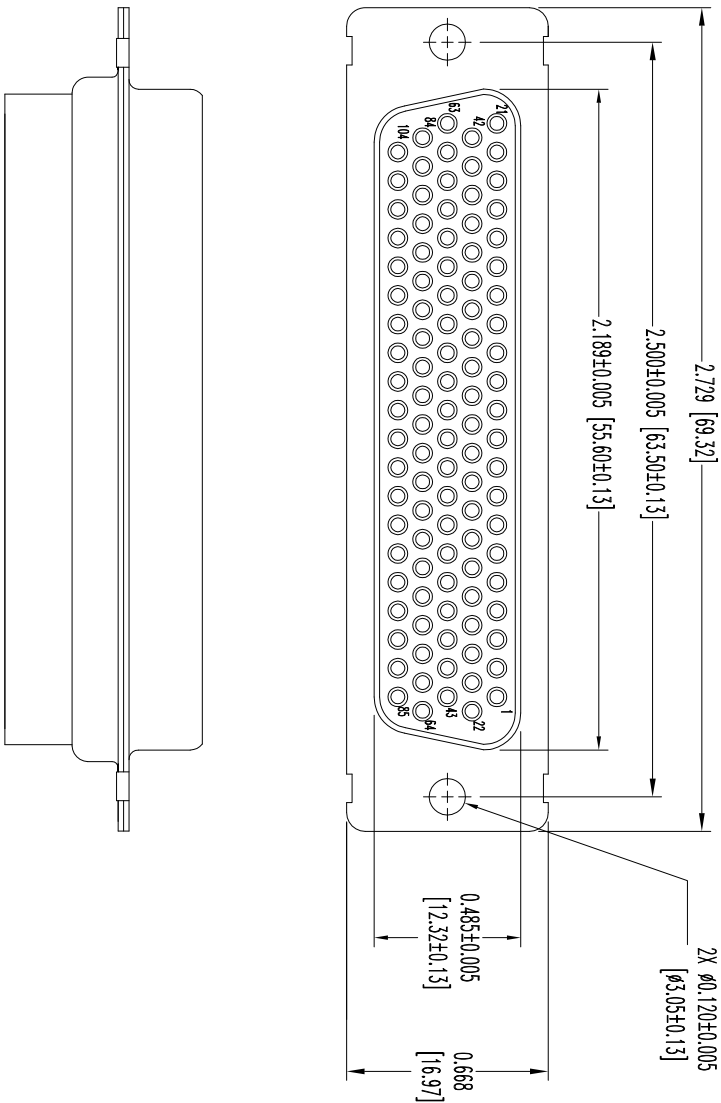

104X FEMALE CONTACT
ENLARGED

DATE	REV	REVISION/RECORD	APP	DR	CK
1-16-09	NC	ECO 30494	RCW	YK	TK
3-29-10	A	ECO 32304	COLB	BE	SV

SK10213


NOTES:

1. MATERIALS AND FINISHES:
INSULATOR: GLASS FILLED POLYESTER PER ASTM D5927, UL 94V-0, BLUE COLOR.
CONTACT: BRASS, GOLD FLASH OVER NICKEL FINISH.
SHELS: STEEL, ZINC PLATE WITH CHROMATE SEAL.
2. DETAILED PRODUCT, ELECTRICAL, AND MECHANICAL INFORMATION IS AVAILABLE IN THE LATEST HIGH DENSITY D-SUBMINIATURE PRODUCT PUBLICATION.
VISIT CONNECTPOSITRONIC.COM/PRODUCTS/59/HIGHDENSITYD-SUBMINIATURE OR CONNECTPOSITRONIC.COM.
3. DIMENSIONS ARE IN INCHES [MILLIMETERS].



POSITRONIC
INDUSTRIES INC.
www.connectpositronic.com

FSCM 28198



DECIMAL TOL.
 $\pm 0.015 [0.38]$

DD SERIES

SCALE
N.T.S.

DRAWN BY
YK
APPROVED BY
R WILLIAMS

TITLE
DD104S10000

DATE
1-16-09

DRAWING NUMBER
SK10213

REV.
A