

# **AW-CM467-SUR**

## **IEEE 802.11 a/b/g/n/ac and Bluetooth 5.2 Module**

### **Datasheet**

**Rev. E**

**DF**

**(For Standard)**

## Features

### Wi-Fi

- Dual band 802.11 a/b/g/n/ac
- Single-stream spatial multiplexing up to 433.3 Mbps
- Supports 20, 40, and 80 MHz channels with optional SGI (256 QAM modulation).
- Security: WEP, WPA/WPA2 (personal), AES (HW), TKIP (HW), CKIP (software support)

### Bluetooth

- Qualified for Bluetooth Core Specification 5.2 with all Bluetooth 4.2 optional features
- Supports extended synchronous connections (eSCO), for enhanced voice quality by allowing for retransmission of dropped packets.
- Adaptive Frequency Hopping (AFH) for reducing radio frequency interference
- Supports multiple simultaneous Advanced Audio Distribution Profiles (A2DP) for stereo sound.

## Revision History

Document NO: R2-2467-DST-04

[illegible]

## Table of Contents

<b>Features</b> .....	<b>2</b>
<b>Revision History</b> .....	<b>3</b>
<b>Table of Contents</b> .....	<b>4</b>
<b>1. Introduction</b> .....	<b>5</b>
1.1 Product Overview .....	5
1.2 Block Diagram.....	6
1.3 Specifications Table .....	7
1.3.1 General .....	7
1.3.2 WLAN .....	7
1.3.3 Bluetooth.....	9
1.3.4 Operating Conditions.....	10
<b>2. Pin Definition</b> .....	<b>11</b>
2.1 Pin Map.....	11
2.2 Pin Table.....	12
2.3 Host Configuration Interface Table.....	14
<b>3. Electrical Characteristics</b> .....	<b>15</b>
3.1 Absolute Maximum Ratings .....	15
3.2 Recommended Operating Conditions .....	15
3.3 Digital IO Pin DC Characteristics.....	16
3.4 Host Interface.....	17
3.4.1 SDIO Interface .....	17
3.4.2 UART Interface .....	21
3.5 Power up Timing Sequence .....	23
3.6 Power Consumption* .....	26
3.6.1 WLAN .....	26
3.6.2 Bluetooth.....	27
<b>4. Mechanical Information</b> .....	<b>28</b>
4.1 Mechanical Drawing .....	28
<b>5. Packaging Information</b> .....	<b>29</b>

## 1. Introduction

### 1.1 Product Overview

The Cypress AW-CM467-SUR device provides the highest level of integration for embedded and IoT wireless systems with integrated single-stream IEEE 802.11a/b/g/n/ac, MAC/baseband/radio and Bluetooth 5.2 (Basic Rate, Enhanced Data Rate and Bluetooth Low Energy).


AW-CM467-SUR supports all rates specified in the IEEE 802.11 a/b/g/n/ac specifications. IEEE 802.11ac's 256-QAM is supported for MCS8 in 20 MHz channels and MCS8/MCS9 in 40 MHz & 80 MHz channels to enable data rates of up to 433.3 Mbps. Included on-chip are 2.4 GHz and 5 GHz power amplifiers and low-noise amplifiers.

The WLAN section supports the following host interface options: an SDIO v3.0 interface that can operate in 4b or 1b mode and a USB 2.0 interface. The Bluetooth section supports USB 2.0, USB 1.1, SDIO and a high-speed 4-wire UART interface. An on-chip USB 2.0 hub provides a shared single USB connection to both WLAN and Bluetooth target devices.

Using advanced design techniques and process technology to reduce active and idle power, the AW-CM467-SUR is designed to address the need of mobile devices that require minimal power consumption and compact size. It includes a power management unit (PMU) which simplifies the system power topology and allows for direct operation from a mobile platform battery while maximizing battery life.

The AW-CM467-SUR implements highly sophisticated enhanced collaborative coexistence hardware mechanisms and algorithms, which ensure that WLAN and Bluetooth collaboration is optimized for maximum performance. As a result, enhanced overall quality for simultaneous voice, video, and data transmission on an embedded and IoT system is achieved.

## 1.2 Block Diagram

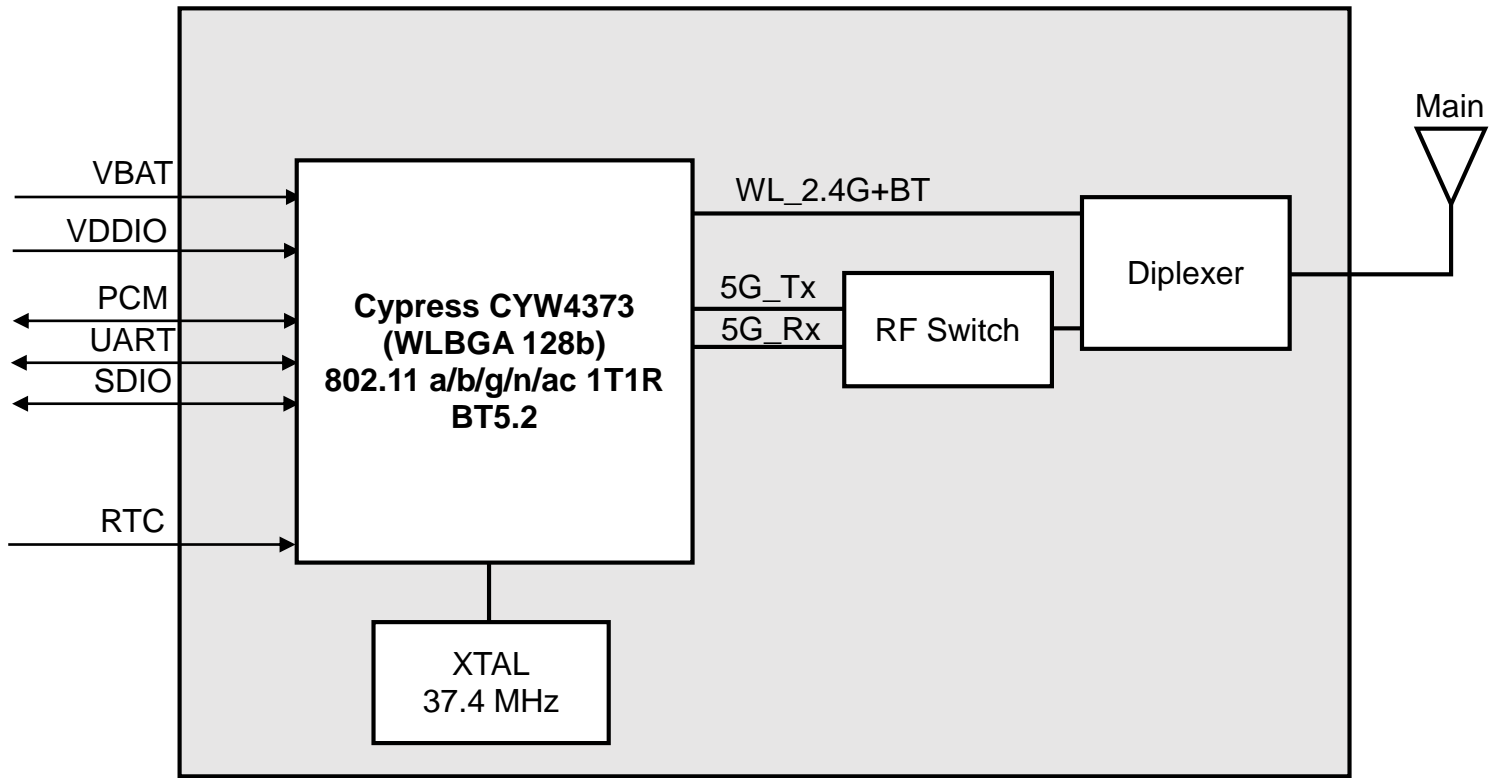

AW-CM467-SUR BLOCK DIAGRAM

## 1.3 Specifications Table

### 1.3.1 General

Features	Description
<b>Product Description</b>	IEEE 802.11 a/b/g/n/ac Wireless LAN and Bluetooth 5.2 Module
<b>Major Chipset</b>	Cypress CYW4373
<b>Host Interface</b>	WiFi + BT ● SDIO + UART <i>*For Host configuration interface, please refer to section 2.3</i>
<b>Dimension</b>	12mm(L) x 12mm(W) x 1.75mm(T)
<b>Form Factor</b>	LGA module, 47 pins
<b>Antenna</b>	1T1R ANT1(Main) : WiFi/Bluetooth → TX/RX
<b>Weight</b>	0.2g

### 1.3.2 WLAN

Features	Description
<b>WLAN Standard</b>	IEEE 802.11a/b/g/n/ac 1T1R
<b>WLAN VID/PID</b>	N/A
<b>WLAN SVID/SPID</b>	N/A
<b>Frequency Range</b>	WLAN: 2.4 GHz / 5GHz Band
<b>Modulation</b>	DSSS DBPSK(1Mbps), DQPSK(2Mbps), CCK(11/5.5Mbps) OFDM BPSK(9/6Mbps/MCS0), QPSK(18/12Mbps/MCS1~2), 16-QAM(36/24Mbps/MCS3~4), 64-QAM(72.2/54/48Mbps/MCS5~7), 256-QAM(MCS8~9)
<b>Number of Channels</b>	802.11b: USA, Canada and Taiwan – 1 ~ 11 Most European Countries – 1 ~ 13 Japan – 1 ~ 13 802.11g:

	USA and Canada – 1 ~ 11 Most European Countries – 1 ~ 13 802.11n: USA and Canada – 1 ~ 11 Most European Countries – 1 ~ 13 802.11a: USA – 36, 40, 44, 48, 52, 56, 60, 64, 100, 104, 108, 112, 116, 120, 124, 128, 132, 136, 140, 149, 153, 157, 161, 165				
<b>Output Power<sup>1</sup></b>	<b>2.4G</b>				
		Min	Typ	Max	Unit
	11b (11Mbps) @EVM<35%	15	17	19	dBm
	11g (54Mbps) @EVM ≤ -25 dB	13	15	17	dBm
	11n (HT20 MCS7) @EVM ≤ -27 dB	13	15	17	dBm
	11n (HT40 MCS7) @EVM ≤ -27 dB	11	13	15	dBm
	<b>5G</b>				
		Min	Typ	Max	Unit
	11a (54Mbps) @EVM ≤ -25 dB	13	15	17	dBm
	11n (HT20 MCS7) @EVM ≤ -27 dB	12	14	16	dBm
	11n (HT40 MCS7) @EVM ≤ -27 dB	10	12	14	dBm
	11ac (VHT20 MCS8) @EVM ≤ -30 dB	9	11	13	dBm
	11ac (VHT40 MCS9) @EVM ≤ -32 dB	7	9	11	dBm
	11ac (VHT80 MCS9) @EVM ≤ -32 dB	6	8	10	dBm
<b>Receiver Sensitivity<sup>1</sup></b>	<b>2.4G</b>				
		Min	Typ	Max	Unit
	11b (11Mbps)		-87	-84	dBm
	11g (54Mbps)		-73	-70	dBm
	11n (HT20 MCS7)		-73	-70	dBm
	11n (HT40 MCS7)		-71	-68	dBm
	<b>5G(n/ac packets with LDPC)</b>				
		Min	Typ	Max	Unit
	11a (54Mbps)		-72	-69	dBm
	11n (HT20 MCS7)		-70	-67	dBm



	11n (HT40 MCS7)		-68	-65	dBm
	11ac (VHT20 MCS8)		-67	-64	dBm
	11ac (VHT40 MCS9)		-62	-59	dBm
	11ac (VHT80 MCS9)		-59	-56	dBm
<b>Data Rate</b>	802.11b: 1, 2, 5.5, 11Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0~7 HT20/HT40 802.11a: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11ac: MCS0~8 VHT20 802.11ac: MCS0~9 VHT40/VHT80				
<b>Security</b>	<ul style="list-style-type: none"> <li>● WPA™- and WPA2™- (Personal) support for powerful encryption and authentication</li> <li>● AES and TKIP acceleration hardware for faster data encryption and 802.11i compatibility</li> <li>● Wi-Fi Protected Setup (WPS)</li> <li>● WEP</li> <li>● CKIP(Software)</li> <li>● WPA3</li> </ul>				

\* If you have any certification questions about output power please contact FAE directly.

### 1.3.3 Bluetooth

Features	Description				
<b>Bluetooth Standard</b>	Bluetooth 2.1+Enhanced Data Rate (EDR)/BT3.0/BT4.2/BT5.2				
<b>Bluetooth VID/PID</b>	N/A				
<b>Frequency Range</b>	2400~2483.5MHz				
<b>Modulation</b>	GFSK (1Mbps), $\pi/4$ DQPSK (2Mbps) and 8DPSK (3Mbps)				
<b>Output Power<sup>1</sup></b>		Min	Typ	Max	Unit
	Basic rate	6	8	10	dBm
	LE	6	8	10	dBm
<b>Receiver Sensitivity<sup>1</sup></b>		Min	Typ	Max	Unit
	DH5		-84	-81	dBm
	2DH5		-84	-81	dBm
	3DH5		-76	-73	dBm
	LE		-86	-83	dBm


<sup>1</sup> Note: this product is under development, and the RF performance is still being fine-tuned, so the relevant values may be subject to change without any notice

### 1.3.4 Operating Conditions

Features	Description
<b>Operating Conditions</b>	
<b>Voltage</b>	3.2 V– 4.8 V
<b>Operating Temperature</b>	-20°C ~70°C
<b>Operating Humidity</b>	less than 85% R.H.
<b>Storage Temperature</b>	-40°C ~85°C
<b>Storage Humidity</b>	less than 60% R.H.
<b>ESD Protection</b>	
<b>Human Body Model</b>	±2KV per MIL-STD-883H Method 3015.8
<b>Charged Device Model</b>	±250V per JEDEC EIA/JESD22-C101E

## 2. Pin Definition

### 2.1 Pin Map

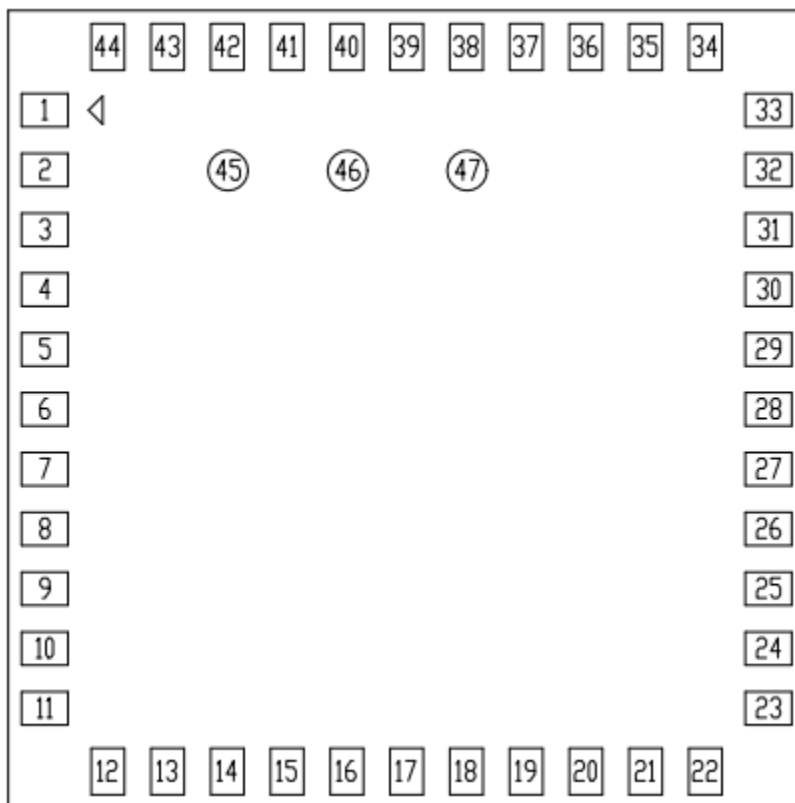

**AW-CM467-SUR Top View Pin Map**

## 2.2 Pin Table

Pin No	Definition	Basic Description	Voltage	Type
1	GND	Ground.		GND
2	WL_BT_ANT	WLAN/BT RF TX/RX path.		RF
3	GND	Ground.		GND
4	NC	Floating Pin, No connect to anything.		Floating
5	NC	Floating Pin, No connect to anything.		Floating
6	BT_DEV_WAKE	Bluetooth DEV_WAKE.	VDDIO	I/O
7	BT_HOST_WAKE	Bluetooth HOST_WAKE.	VDDIO	I/O
8	NC	Floating Pin, No connect to anything		Floating
9	VBAT	3.3V power pin	3.3V	VCC
10	NC	Floating Pin, No connect to anything.		Floating
11	NC	Floating Pin, No connect to anything.		Floating
12	WL_REG_ON	Used by PMU to power-up or power down the internal CYW4373 regulators used by the WLAN section. Also, when deasserted, this pin holds the WLAN section in reset. This pin has an internal 200 kΩ pull-down resistor that is enabled by default. It can be disabled through programming.	VDDIO	I
13	WL_HOST_WAKE	WL Host Wake.	VDDIO	O
14	SDIO_DATA2	SDIO Data Line 2.	VDDIO	I/O
15	SDIO_DATA3	SDIO Data Line 3.	VDDIO	I/O
16	SDIO_DATA_CMD	SDIO Command Input.	VDDIO	I/O
17	SDIO_DATA_CLK	SDIO Clock Input.	VDDIO	I
18	SDIO_DATA0	SDIO Data Line 0.	VDDIO	I/O
19	SDIO_DATA1	SDIO Data Line 1.	VDDIO	I/O
20	GND	Ground.		GND
21	VIN_LDO_OUT	Internal Buck 1.2V voltage generation pin.	1.4V	O

22	VDDIO	VDDIO supply for WLAN and BT.	1.8V/3.3V	VCC
23	VIN_LDO	Internal Buck 1.2V voltage generation pin.	1.4V	I
24	LPO	External 32K or RTC clock.	0.2~3.3V	I
25	BT_PCM_OUT	PCM data output.	VDDIO	O
26	BT_PCM_CLK	PCM clock; can be master (output) or slave (input).	VDDIO	I/O
27	BT_PCM_IN	PCM data input.	VDDIO	I
28	BT_PCM_SYNC	PCM sync; can be master (output) or slave (input), or SLIMbus data.	VDDIO	I/O
29	STRAP_0	SDIO_PADVDDIO sel	Follow host configuration interface	I
30	NC	Floating Pin, No connect to anything.		Floating
31	GND	Ground.		GND
32	NC	Floating Pin, No connect to anything.		Floating
33	GND	Ground.		GND
34	BT_REG_ON	Used by PMU to power-up or power down the internal CYW4373 regulators used by the Bluetooth section. Also, when deasserted, this pin holds the Bluetooth section in reset. This pin has an internal 200 k $\Omega$ pull-down resistor that is enabled by default. It can be disabled through programming.	VDDIO	I
35	NC	Floating Pin, No connect to anything.		Floating
36	GND	Ground.		GND
37	NC	Floating Pin, No connect to anything.		Floating
38	NC	Floating Pin, No connect to anything.		Floating
39	RF_SW_CTRL5	Programmable RF switch control lines	3.3V	O
40	NC	Floating Pin, No connect to anything.		Floating
41	BT_UART_RTS	UART request-to-send. Active-low request-to-send signal for the HCI UART interface.	VDDIO	O
42	BT_UART_TXD	UART serial output. Serial data output for the HCI UART interface.	VDDIO	O
43	BT_UART_RXD	UART serial input. Serial data input for the HCI UART interface.	VDDIO	I
44	BT_UART_CTS	UART clear-to-send. Active-low clear-to-send signal for the HCI UART interface.	VDDIO	I

45	NC	Floating Pin, No connect to anything.		Floating
46	NC	Floating Pin, No connect to anything.		Floating
47	NC	Floating Pin, No connect to anything.		Floating

## 2.3 Host Configuration Interface Table

Scenario	WLAN	BT	Strap_0 Value
1	SDIO(1.8V)	UART	1
2	SDIO(3.3V)	UART	0

### 3. Electrical Characteristics

#### 3.1 Absolute Maximum Ratings

Symbol	Parameter	Minimum	Typical	Maximum	Unit
<b>VBAT</b>	DC supply for the VBAT and PA driver supply	-0.5	-	5.5	V
<b>VDDIO</b>	DC supply voltage for digital I/O	-0.5	-	3.9	V
<b>Tj</b>	Maximum junction temperature	-	-	125	°C

#### 3.2 Recommended Operating Conditions

Symbol	Parameter	Minimum	Typical	Maximum	Unit
<b>VBAT</b>	Power supply for Internal Regulator	3.2	3.6	4.8	V
<b>VDDIO</b>	DC supply voltage for digital I/O	1.62	1.8/3.3	3.63	V

### 3.3 Digital IO Pin DC Characteristics


Symbol	Parameter	Minimum	Typical	Maximum	Unit
<b>Digital I/O pins, VDDIO=1.8V</b>					
<b>V<sub>IH</sub></b>	Input high voltage	$0.65 \times V_{DDIO}$	-	-	V
<b>V<sub>IL</sub></b>	Input low voltage	-	-	$0.35 \times V_{DDIO}$	V
<b>V<sub>OH</sub></b>	Output high voltage	$V_{DDIO} - 0.45$	-	-	V
<b>V<sub>OL</sub></b>	Output Low Voltage	-	-	0.45	V
<b>Digital I/O pins, VDDIO=3.3V</b>					
<b>V<sub>IH</sub></b>	Input high voltage	2.00	-	-	V
<b>V<sub>IL</sub></b>	Input low voltage	-	-	0.80	V
<b>V<sub>OH</sub></b>	Output high voltage	$V_{DDIO} - 0.4$	-	-	V
<b>V<sub>OL</sub></b>	Output low Voltage	-	-	0.40	V



## 3.4 Host Interface

### 3.4.1 SDIO Interface

#### SDIO Bus Timing (Default Mode)

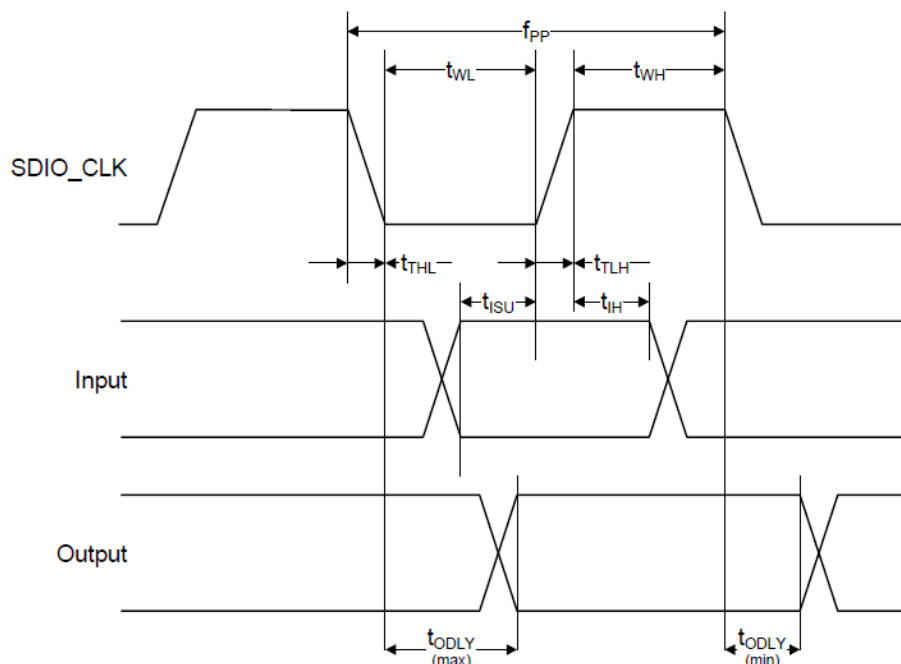


#### SDIO Bus Timing Parameters (Default Mode)

Parameter	Symbol	Minimum	Typical	Maximum	Unit
<b>SDIO CLK (All values are referred to minimum VIH and maximum VIL)</b>					
Frequency – Data Transfer mode	$f_{PP}$	0	–	25	MHz
Frequency – Identification mode	$f_{OD}$	0	–	400	kHz
Clock low time	$t_{WL}$	10	–	–	ns
Clock high time	$t_{WH}$	10	–	–	ns
Clock rise time	$t_{TLH}$	–	–	10	ns
Clock low time	$t_{THL}$	–	–	10	ns
<b>Inputs: CMD, DAT (referenced to CLK)</b>					
Input setup time	$t_{ISU}$	5	–	–	ns
Input hold time	$t_{IH}$	5	–	–	ns

Outputs: CMD, DAT (referenced to CLK)					
Output delay time – Data Transfer mode	t <sub>ODLY</sub>	0	–	14	ns
Output delay time – Identification mode	t <sub>ODLY</sub>	0	–	50	ns

## SDIO Bus Timing (High-Speed Mode)

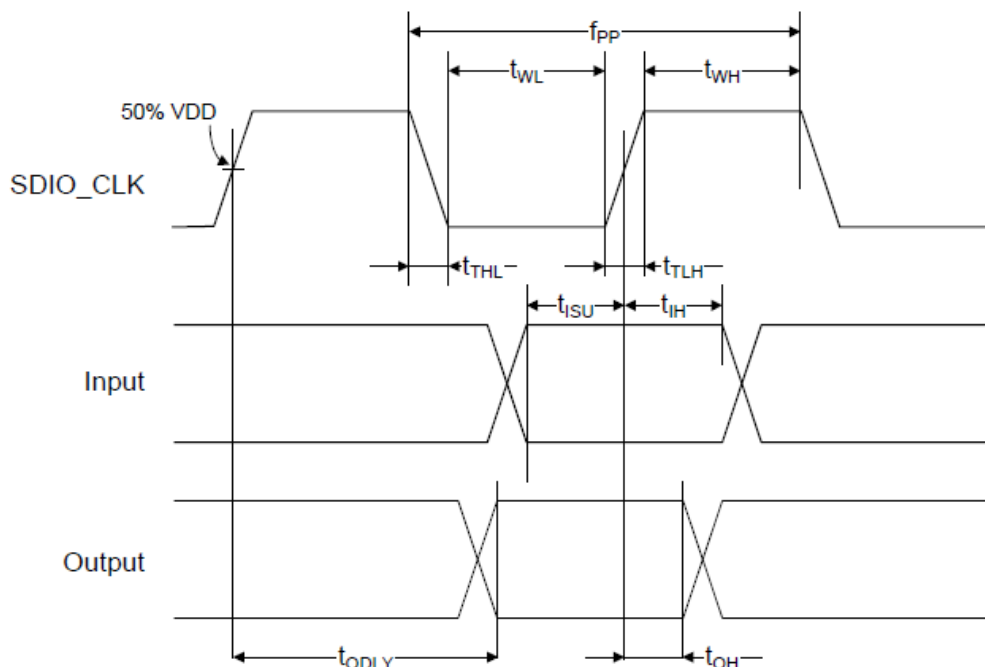

SDIO Bus Timing Parameters (High-Speed Mode)

Parameter	Symbol	Minimum	Typical	Maximum	Unit
<b>SDIO CLK (all values are referred to minimum <math>V_{IH}</math> and maximum <math>V_{IL}^b</math>)</b>					
Frequency – Data Transfer Mode	$f_{PP}$	0	–	50	MHz
Frequency – Identification Mode	$f_{OD}$	0	–	400	kHz
Clock low time	$t_{WL}$	7	–	–	ns
Clock high time	$t_{WH}$	7	–	–	ns
Clock rise time	$t_{TLH}$	–	–	3	ns
Clock low time	$t_{THL}$	–	–	3	ns
<b>Inputs: CMD, DAT (referenced to CLK)</b>					
Input setup Time	$t_{ISU}$	6	–	–	ns
Input hold Time	$t_{IH}$	2	–	–	ns
<b>Outputs: CMD, DAT (referenced to CLK)</b>					
Output delay time – Data Transfer Mode	$t_{ODLY}$	–	–	14	ns
Output hold time	$t_{OH}$	2.5	–	–	ns

Total system capacitance (each line)	CL	–	–	40	pF
--------------------------------------	----	---	---	----	----

### 3.4.2 UART Interface

The UART is a standard 4-wire interface (RX, TX, RTS, and CTS) with adjustable baud rates from 9600 bps to 4.0 Mbps. The interface features an automatic baud rate detection capability that returns a baud rate selection. Alternatively, the baud rate may be selected through a vendor-specific UART HCI command.

UART has a 1040-byte receive FIFO and a 1040-byte transmit FIFO to support EDR. Access to the FIFOs is conducted through the AHB interface through either DMA or the CPU. The UART supports the Bluetooth UART HCI specification: H4 and a custom Extended H4. The default baud rate is 115.2 Kbaud.


The AW-CM467-SUR UART can perform XON/XOFF flow control and includes hardware support for the Serial Line Input Protocol (SLIP).

It can also perform wake-on activity. For example, activity on the RX or CTS inputs can wake the chip from a sleep state.

Normally, the UART baud rate is set by a configuration record downloaded after device reset, or by automatic baud rate detection, and the host does not need to adjust the baud rate. Support for changing the baud rate during normal HCI UART operation is included through a vendor-specific command that allows the host to adjust the contents of the baud rate registers. The AW-CM467-SUR UARTs operate correctly with the host UART as long as the combined baud rate error of the two devices is within  $\pm 2\%$ .

#### UART Interface Signals

PIN No.	Name	Description	Type
18	BT_UART_TXD	Bluetooth UART Serial Output. Serial data output for the HCI UART Interface	O
19	BT_UART_RXD	Bluetooth UART Series Input. Serial data input for the HCI UART Interface	I
21	BT_UART_RTS_N	Bluetooth UART Request-to-Send. Active-low request-to-send signal for the HCI UART interface	O
17	BT_UART_CTS_N	Bluetooth UART Clear-to-Send. Active-low clear-to-send signal for the HCI UART interface.	I

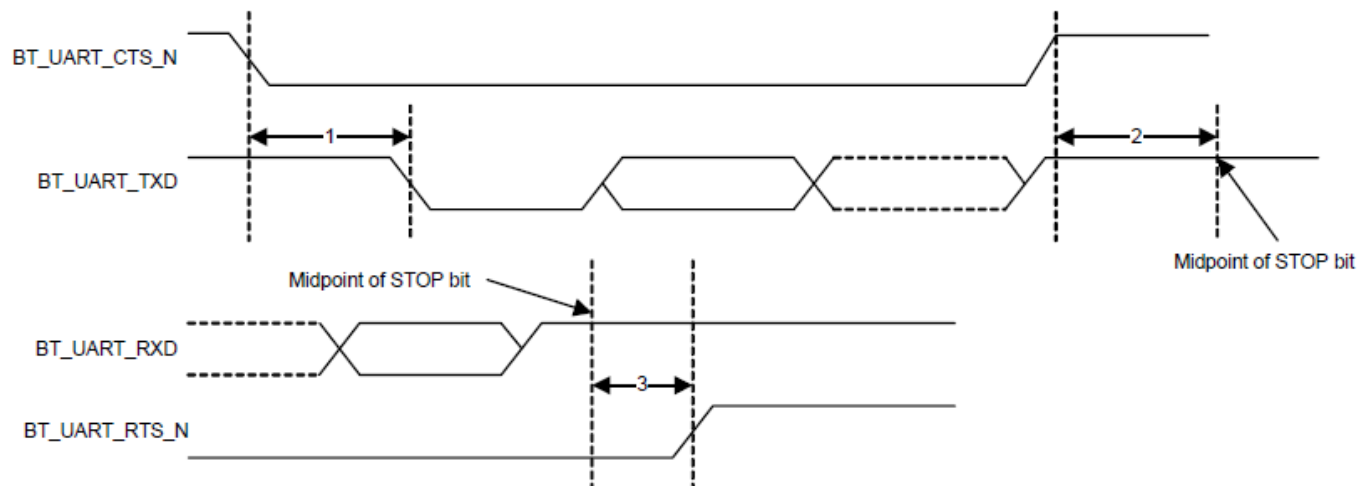

## UART Timing

	Reference Characteristics	Minimum	Typical	Maximum	Unit
1	Delay time, BT_UART_CTS_N low to BT_UART_TXD valid	–	–	1.5	Bit periods
2	Setup time, BT_UART_CTS_N high before midpoint of stop bit	–	–	0.5	Bit periods
3	Delay time, midpoint of stop bit to BT_UART_RTS_N high	–	–	0.5	Bit periods

### 3.5 Power up Timing Sequence

The AW-CM467-SUR has three signals that allow the host to control power consumption by enabling or disabling the Bluetooth, WLAN, and internal regulator blocks. These signals are described below. Additionally, diagrams are provided to indicate proper sequencing of the signals for various operational states. The timing values indicated are minimum required values; longer delays are also acceptable.

#### Description of Control Signals

##### ■ WL\_REG\_ON:


Used by the PMU to power up the WLAN section. It is also OR-gated with the BT\_REG\_ON input to control the internal AW-CM467-SUR regulators. When this pin is high, the regulators are enabled and the WLAN section is out of reset. When this pin is low the WLAN section is in reset. If both the BT\_REG\_ON and WL\_REG\_ON pins are low, the regulators are disabled.

##### ■ BT\_REG\_ON:

Used by the PMU (OR-gated with WL\_REG\_ON) to power up the internal AW-CM467-SUR regulators. If both the BT\_REG\_ON and WL\_REG\_ON pins are low, the regulators are disabled. When this pin is low and WL\_REG\_ON is high, the BT section is in reset.

#### Note:


For both the WL\_REG\_ON and BT\_REG\_ON pins, there should be at least a 10 msec time delay between consecutive toggles (where both signals have been driven low). This is to allow time for the CBUCK regulator to discharge. If this delay is not followed, then there may be a VDDIO in-rush current on the order of 36 mA during the next PMU cold start.

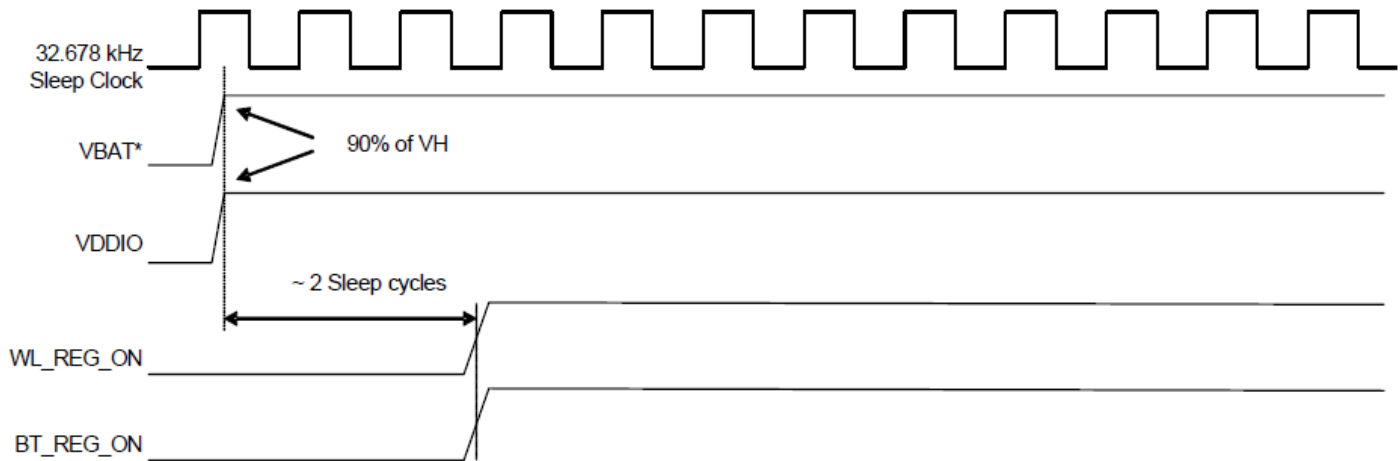

**\*Notes:**

1. VBAT should not rise 10%–90% faster than 40 microseconds.
2. VBAT should be up before or at the same time as VDDIO. VDDIO should NOT be present first or be held high before VBAT is high.

## WLAN = ON, Bluetooth = ON

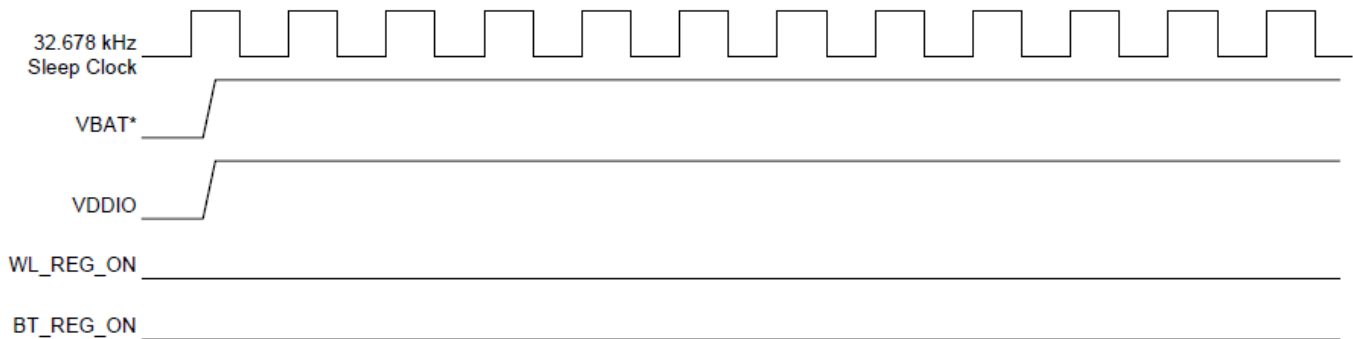


**\*Notes:**


1. VBAT should not rise 10%–90% faster than 40 microseconds.
2. VBAT should be up before or at the same time as VDDIO. VDDIO should NOT be present first or be held high before VBAT is high.

## WLAN = OFF, Bluetooth = OFF



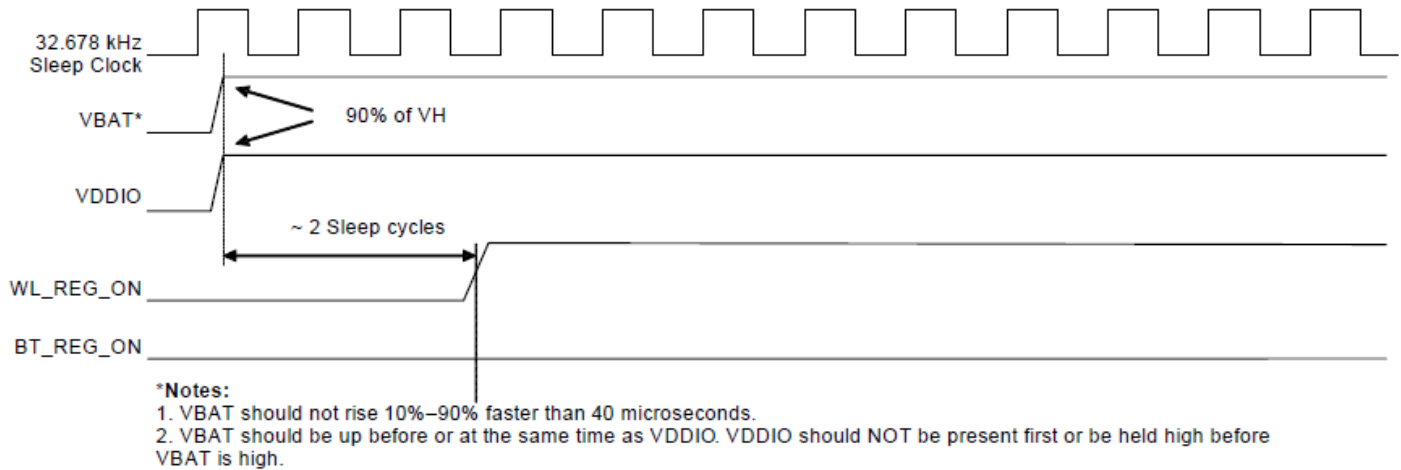

## WLAN = ON, Bluetooth = OFF

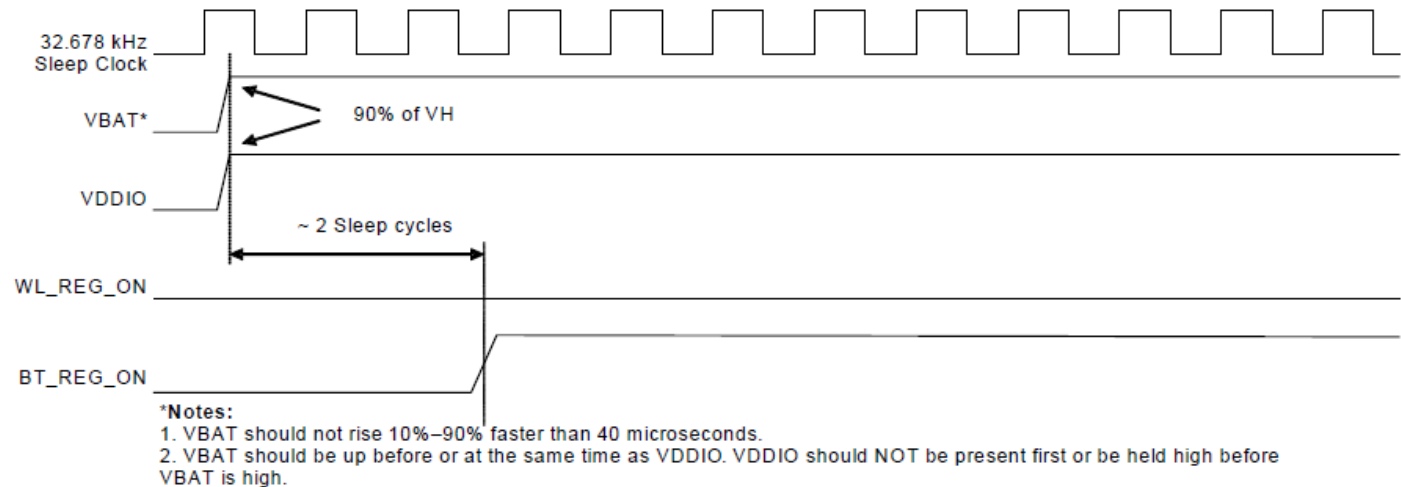

## WLAN = OFF, Bluetooth = ON

### 3.6 Power Consumption\*

#### 3.6.1 WLAN

No.	Item			VBAT=3.3V(mA)		
				Max.	Avg.	
1	WLAN OFF <sup>*(1)(2)</sup>			0.002		
2	Sleep <sup>*(2)(3)</sup>			0.004	0.003	
3	Power Save DTIM1 (2.4GHz) <sup>*(2) (4)(5)</sup>			58	2.3	
5	Power Save DTIM1 (5GHz) <sup>*(2)(4) (5)</sup>			112	2.0	
Band (GHz)	Mode	BW (MHz)	RF Power (dBm)	Transmit		
				Max.	Avg.	Duty (%)
2.4	11b@1Mbps	20	17	318	310	93
	11g@54Mbps	20	15	121	119	25
	11n@MCS7	40	13	113	112	19
5	11a@54Mbps	20	15	138	136	25
	11n@MCS7	40	12	129	128	19
	11ac@MCS8 NSS1	80	8	131	129	10
Band (GHz)	Mode	BW(MHz)	Receive			
			Max.	Avg.		
2.4	11b@1Mbps	20	58	56		
	11n@MCS7	40	68	67		
5	11a@54Mbps	20	73	73		
	11ac@MCS8 NSS1	80	123	120		

No.	Item			VDDIO=1.8V(uA)	
				Max.	Avg.
1	WLAN OFF <sup>*(1)</sup>			0.021	
2	Sleep <sup>*(3)</sup>			249	249
3	Power Save DTIM1 (2.4GHz) <sup>*(4) (6)</sup>			252	213
Band (GHz)	Mode	BW (MHz)	RF Power (dBm)	Transmit	
				Max.	Avg.
2.4	11b@1Mbps	20	17	40	40
Band (GHz)	Mode	BW(MHz)		Receive	
				Max.	Avg.
2.4	11b@1Mbps	20		40	40

(1) WLAN and Bluetooth OFF (WL\_REG\_ON=LOW, BT\_REG\_ON=LOW)

(2) Using normal firmware

(3) Run command "wifmac\_x86 deepsleep 1" into sleep

(4) Associated with AP use ASUS RT-AC66U, DTIM = 1, Beacon Interval = 100 ms

(5) Run the following command and measured a current consumed across the DTIM duration

"wl mpc 1"

"wl PM 2"

"wl bcntim 9"

\* The power consumption is based on Azurewave test environment, these data for reference only.

### 3.6.2 Bluetooth

No.	Mode	Packet Type	RF Power (dBm)	VBAT=3.3 V	
				Max.	Avg.
1	Sleep	n/a	n/a	23mA	5.5uA
2	Transmit <sup>*(1)</sup>	DH5 / 3-DH5	8	41.2mA	40.2mA
3	Receive <sup>*(1)</sup>	DH5 / 3-DH5	n/a	14.6mA	14.5mA
No.	Mode	Packet Type	RF Power (dBm)	VBAT=1.8V	
				Max.	Avg.
1	Sleep	n/a	n/a	279uA	264uA
2	Transmit <sup>*(1)</sup>	DH5 / 3-DH5	8	19.8uA	19.8uA
3	Receive <sup>*(1)</sup>	DH5 / 3-DH5	n/a	19.9uA	19.8uA


(1) BlueTool BB\_Packet\_Length=65535

(2) BlueTool Length\_of\_Test\_Data=37

\* The power consumption is based on Azurewave test environment, these data for reference only.

## 4. Mechanical Information


### 4.1 Mechanical Drawing

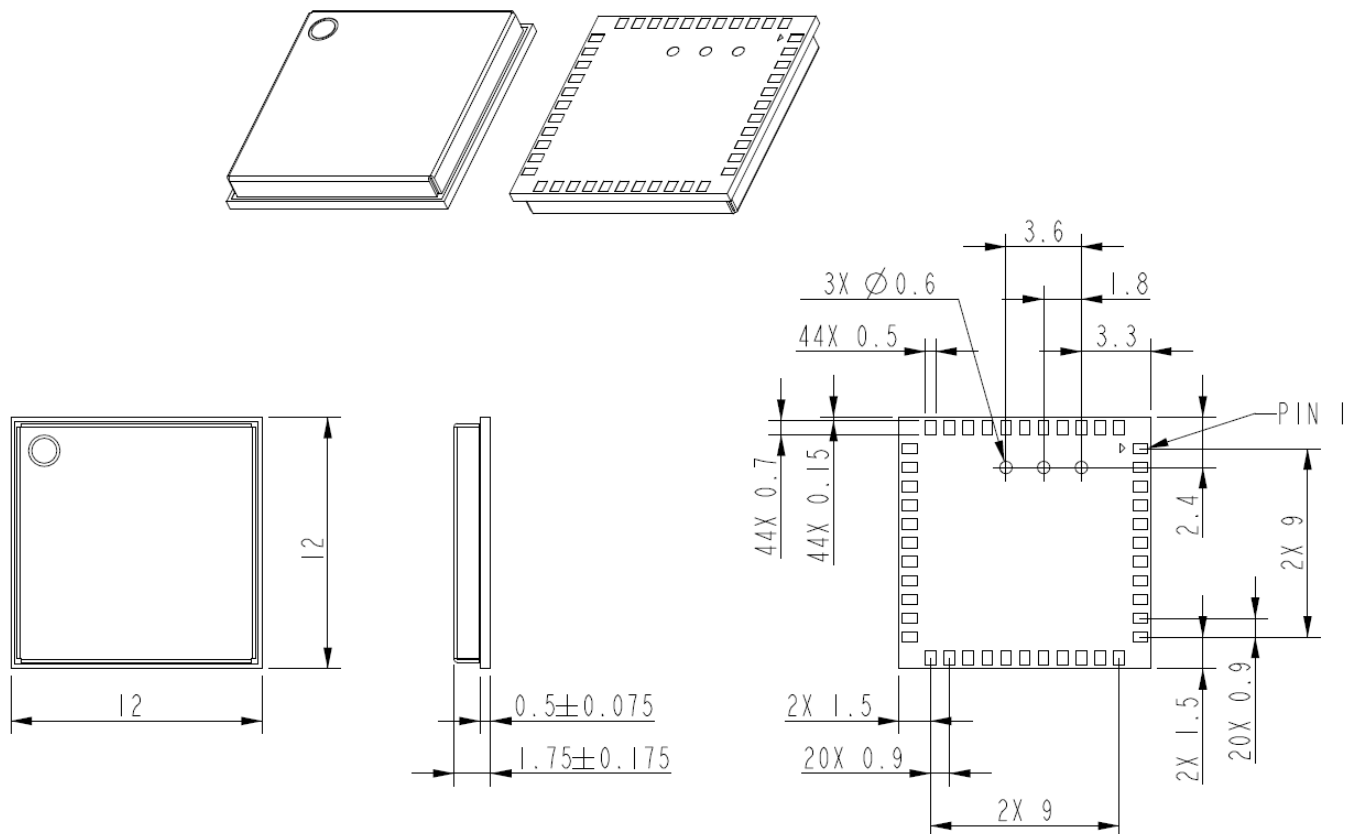

TOLERANCE UNLESS OTHERWISE SPECIFIED:  $\pm 0.1$  mm

## 5. Packaging Information

1. One reel can pack 1,500pcs 12x12 LGA modules
2. One production label is pasted on the reel, one desiccant and one humidity indicator card are put on the reel

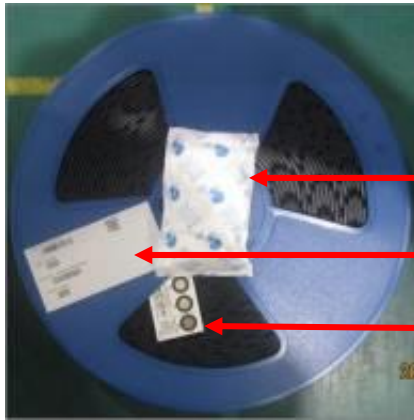

One desiccant

One production label

One humidity indicator card

3. One reel is put into the anti-static moisture barrier bag, and then one label is pasted on the bag



One production label

4. A bag is put into the anti-static pink bubble wrap



One anti-static pink bubble wrap

5. A bubble wrap is put into the inner box and then one label is pasted on the inner box



One production label

6. **5 inner boxes** could be put into one carton
















Production

7. Sealing the carton by AzureWave tape



8. One carton label and one box label are pasted on the carton. If one carton is not full, one balance label pasted on the carton



Example of carton label	 <table border="1"> <tr> <td colspan="2">  </td> </tr> <tr> <td>AzureWave P/N</td><td></td> </tr> <tr> <td>Customer</td><td>由業務提供</td> </tr> <tr> <td>Customer P/N</td><td>由業務提供</td> </tr> <tr> <td>Customer PO</td><td>由業務提供</td> </tr> <tr> <td>Description</td><td>AW-XXXXXX</td> </tr> <tr> <td>QTY</td><td>1200 pcs</td> </tr> <tr> <td>C/N</td><td></td> </tr> <tr> <td>N.W.</td><td>G.W.</td> </tr> <tr> <td colspan="2">  </td> </tr> </table>			AzureWave P/N		Customer	由業務提供	Customer P/N	由業務提供	Customer PO	由業務提供	Description	AW-XXXXXX	QTY	1200 pcs	C/N		N.W.	G.W.		
																					
AzureWave P/N																					
Customer	由業務提供																				
Customer P/N	由業務提供																				
Customer PO	由業務提供																				
Description	AW-XXXXXX																				
QTY	1200 pcs																				
C/N																					
N.W.	G.W.																				
																					
Example of box label																					
Example of production label	 <p>P/N: </p> <p>D/C: 1309 </p> <p>PCK NO.: PCKNO0069097 </p> <p>QTY: 294 </p> <p>BAG SEAL DATE: _____</p>																				



Example of balance label

