


50, 40 & 30 W Programmable CC Class 2 / Class II LED Driver with Tri-Mode Dimming™ (TRIAC, ELV & 0-10 V)

Nominal Input Voltage	Max. Output Power	Efficiency	Max. Case Temperature	THD	Power Factor	Dimming Method	Dimming Range	Startup Time
120 & 277 Vac, 220 to 240 Vac	50 W	up to 90% typical	90°C (measured at the hot spot)	< 20% (from 100% to 50% of max rated power)	> 0.9 (from 100% to 50% of max rated power)	Forward-Phase, Reverse-Phase & 0-10V	1 - 100% (% of Iout)	300 ms typical



Side Leads
L 98.5 * W 26.2 * H 21.85 mm
(L 3.88 * W 1.03 * H 0.86 in.)

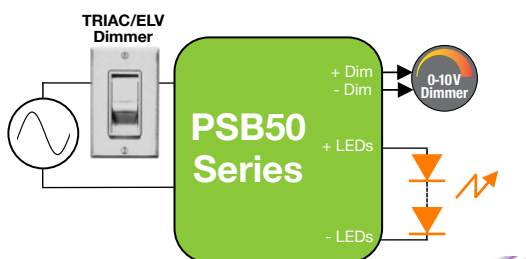

Bottom Leads with Studs: "-S" Suffix
L 98.5 * W 26.2 * H 23.85 mm
(L 3.88 * W 1.03 * H 0.94 in.)

Terminal Blocks: "-T" Suffix
L 154.2 * W 26.25 * H 21.85 mm
(L 6.07 * W 1.03 * H 0.86 in.)

Suffix for the different case options:
1) No suffix: Side leads
2) "-T": Terminal blocks
3) "-S": Bottom lead exit with studs

FEATURES

- Non-linear 0-10V dimming profile with dim-to-off (10V to 9.1V=100%, 1.5V to 0.6V=1%, <0.6V=dim-to-off)
- UL Class P
- Class 2 output power supply
- Lifetime: 50,000 hours @ Tc = 75°C
- 90°C maximum case hot spot temperature
- IP20-rated case with silicone-based potting
- No TRIAC/ELV dimming for "-T" (Terminal Blocks) models, only 0-10V dimming
- Complies with ENERGY STAR®, DLC (DesignLight Consortium®) and CA Title 24 technical requirements

PROGRAMMING

- Current: 100% to 50% in each voltage range
- Data log read: SKU, S/N, lot code, hours of operation, FW revision, fault events: power failure, transients (short or surge), thermal
- Fully programmable and selectable 0-10V dimming profiles: Non-linear with dim-to-off, Logarithmic, Non-Linear without dim-to-off

Part Number	Nominal Input Voltage (Vac)	Max Output Power (W)	Iout (mA)	Output Voltage Range (Vdc)
120 & 277 VAC NOMINAL INPUT VOLTAGE				
PSB30W				
PSB30W-0700-42	120 & 277	29.4	350 to 700	28 42
PSB30W-1050-27	120 & 277	28.4	525 to 1050	18 27
PSB30W-0700-34	120 & 277	27.2	350 to 700	23 34
PSB40W				
PSB40W-1400-27	120 & 277	37.8	700 to 1400	18 27
PSB50W				
PSB50W-0550-85	120 & 277	46.8	275 to 550	57 85
PSB50W-0850-56	120 & 277	47.6	425 to 850	38 56
PSB50W-1200-42	120 & 277	50.4	600 to 1200	28 42
PSB50W-1400-34	120 & 277	47.6	700 to 1400	23 34
120 & 277 VAC NOMINAL INPUT VOLTAGE				
PSB30W				
PSB30W-0700-42-S	120 & 277	29.4	350 to 700	28 42
PSB30W-1050-27-S	120 & 277	28.4	525 to 1050	18 27
PSB30W-0700-34-S	120 & 277	27.2	350 to 700	23 34
PSB40W				
PSB40W-1400-27-S	120 & 277	37.8	700 to 1400	18 27
PSB50W				
PSB50W-0550-85-S	120 & 277	46.8	275 to 550	57 85
PSB50W-0850-56-S	120 & 277	47.6	425 to 850	38 56
PSB50W-1200-42-S	120 & 277	50.4	600 to 1200	28 42
PSB50W-1400-34-S	120 & 277	47.6	700 to 1400	23 34
220 to 240 VAC NOMINAL INPUT VOLTAGE				
PSB30W				
PSB30E-0700-42-T	220 to 240	29.4	350 to 700	28 42
PSB30E-1050-27-T	220 to 240	28.4	525 to 1050	18 27
PSB30E-0700-34-T	220 to 240	27.2	350 to 700	23 34
PSB40W				
PSB40E-1400-27-T	220 to 240	37.8	700 to 1400	18 27
PSB50W				
PSB50E-0550-85-T	220 to 240	46.8	275 to 550	57 85
PSB50E-0850-56-T	220 to 240	47.6	425 to 850	38 56
PSB50E-1200-42-T	220 to 240	50.4	600 to 1200	28 42
PSB50E-1400-34-T	220 to 240	47.6	700 to 1400	23 34

© SELV Class 2       

CHINA Operations
tel: +86-756-6266298
No. 8 Pingdong Road 2
Zhuhai, Guangdong, China 519060

www.erp-power.com

SaveEnergy@erp-power.com

USA Headquarters
tel: +1-805-517-1300
893 Patriot Drive, Suite E
Moorpark, CA 93021, USA