

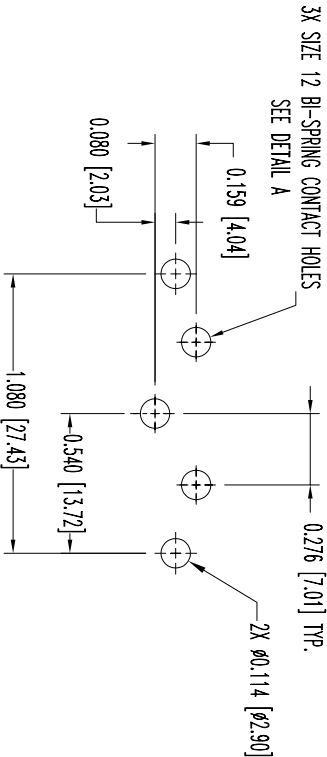
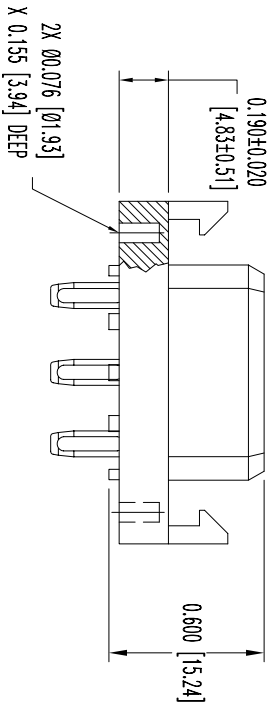
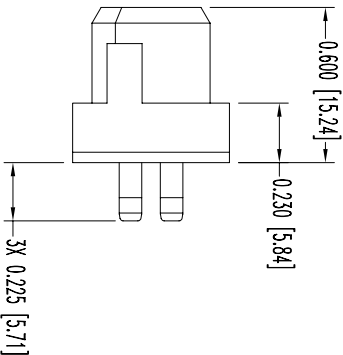


POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND ASSUMES ALL RESPONSIBILITIES AND ASSUMES RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

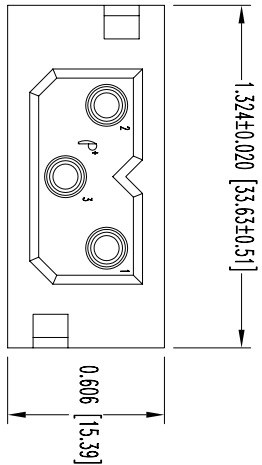

CONTACT HOLE PATTERN

- NOTES:
1. MATERIALS AND FINISHES:
INSULATOR: GLASS FILLED POLYESTER, UL 94V-0, COLOR BLUE.
CONTACTS: PRECISION MACHINED COPPER ALLOY WITH GOLD FLASH OVER NICKEL FINISH.
 2. ELECTRICAL CHARACTERISTICS:
CONTACT CURRENT RATING: 40 AMPERES CONTINUOUS PER IEC 512-3, TEST 5a.
INITIAL CONTACT RESISTANCE: 0.001 OHMS MAXIMUM PER IEC 512-2, TEST 2b.
INSULATOR RESISTANCE: 5 G. OHMS PER IEC 512-2 TEST 3a.
WORKING VOLTAGE: 1,250 V, r.m.s.
 3. TEMPERATURE RANGE: -55°C TO 125°C.
 4. CONNECTORS ARE ROHS COMPLIANT PER ROHS DIRECTIVE 2002/95/EC OF 27 JAN 2003.
 5. DIMENSIONS ARE IN INCHES [MILLIMETERS].

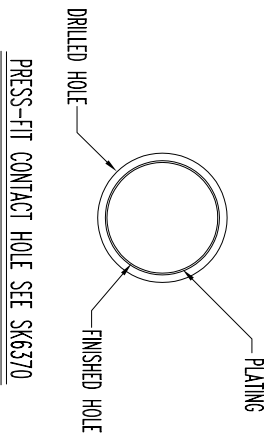



POSITRONIC INDUSTRIES INC.
www.connectpositronic.com

DATE: 4-16-07

DRAWING NUMBER: SK8491

REV: NC

DECIMAL TOL. ± 0.015 [0.38]

ANGULAR TOL. ± 5°

PCS SERIES

SCALE: N.T.S.

APPROVED BY: YK

TITLE: PLB3W3F9300A1/AA

FSCM 28198

DATE	REV	REVISION RECORD	APP	DR	CK
4-16-07	NC	ECO 277776		YK	

SK8491