

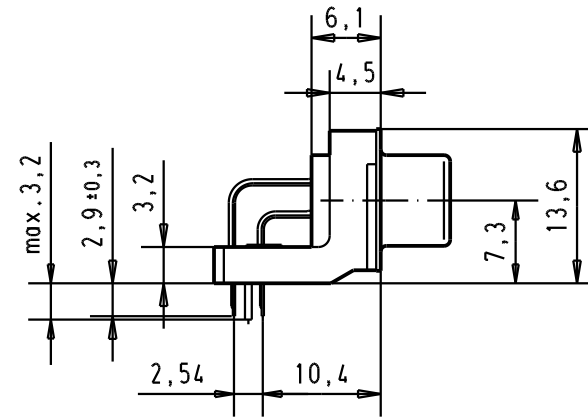
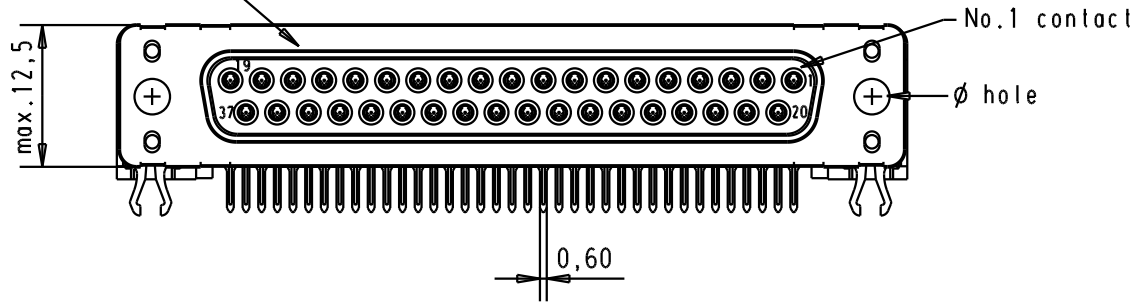



Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75301-802

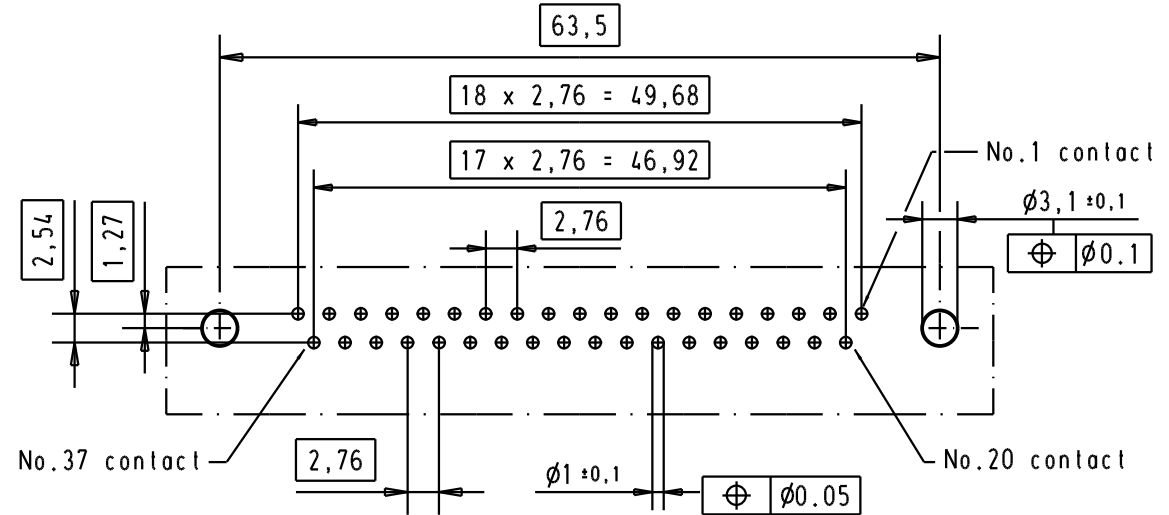

Printed board layout
component side

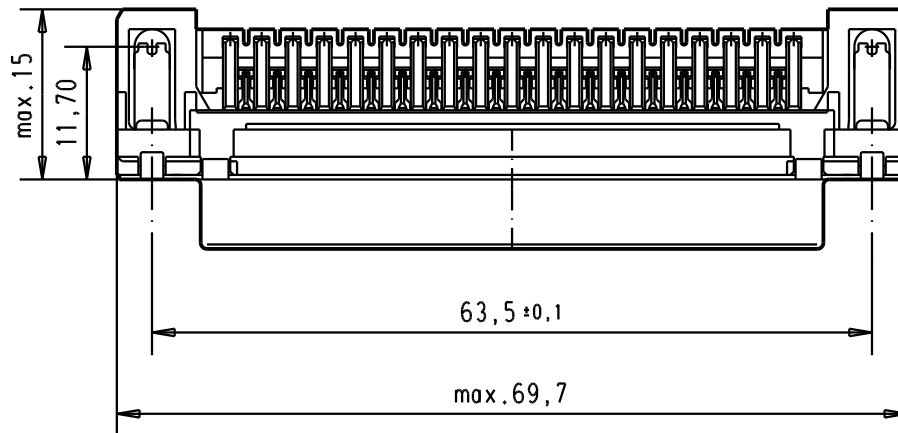

Connector retention and insertion forces on the PCB = 25 / 80 newtons

A							Det.	Name	 All Dim. in mm Orig. Size DIN A 4	D-Sub, high temperature, female, standard, 37 poles, with solder pins 2,9 mm, holes and grounding board lock.	Maßstab/ Scale 1.5:1
							Detail.	05/03/02			
							Insp.				
							Stand.				
	09 66 456 3610	3.1 ± 0.1	1								
	09 66 456 6610	3.1 ± 0.1	2	31892	05/05/04	JH					
	09 66 456 7610	3.1 ± 0.1	3	29723	05/03/02	CV					
	Part number	Ø hole	Performance level	Mod.	Det.	Name	HARTING EURL F-95972 Paris			 Sub.	TB 0966456x61x Blatt/ Page 4