

Description: 1608 Diplexer

PART NUMBER: DPX1608LWFPR2455L

Features:

Applications:

Compact Size

LTE

- Low loss
- · High Soldering Heat Resistance

ELECTRICAL SPECIFICATIONS

Item	Frequency Range	Insertion Loss	Return Loss	Stop-Band Attenuation
Common to Low Freq. Port	2400~2500 MHz	0.4 dB max.	12.74 dB min.	20 dB min. at 4900~5850 MHz
Common to High Freq. Port	4900~5850 MHz	0.6 dB max.	10.16 dB min.	20 dB min. at 2400~2500 MHz
Common Bort	2400~2500 MHz	-	12.74 dB min.	-
Common Port	4900~5850 MHz	-	10.16 dB min.	-

Operating Temperature Range: -40~85°C

Power Capacity: 3W max.

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:




Description: 1608 Diplexer

PART NUMBER: DPX1608LWFPR2455L

MECHANICAL DIMENSION


Outline

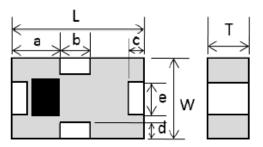

Dimension


L	W	T	а	
1.60±0.10	0.80+0.20		0.65±0.15	
b c		d	е	
0.30+0.10 -0.15		0.15±0.10	0.30+0.10 -0.15	

NOTE: Dimensions in mm.




Termination


Top View



Terminal name	Function
1	High band
2	Common
3	Low band
4	GND

Reference design of EVB

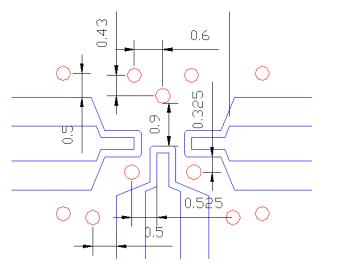



Unit: mm

Line width should be designed to match 50Ω characteristic impedance, depending on PCB material and thickness.

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION






Description: 1608 Diplexer


PART NUMBER: DPX1608LWFPR2455L

MEASURING DIAGRAM

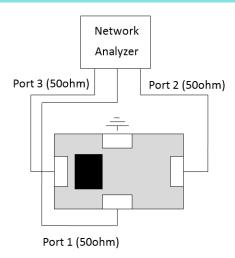

Test Instrument: Agilent E5071C Network Analyzer or equivalent.

ELECTRICAL PERFORMANCES

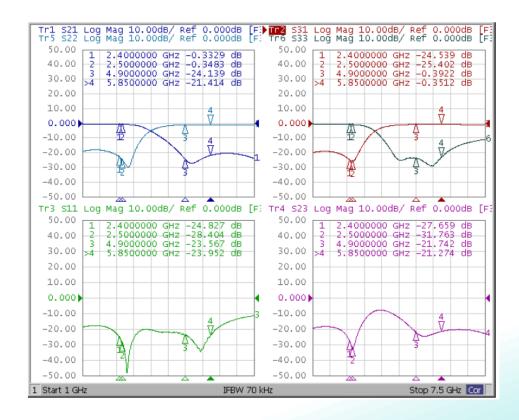

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION







Description: 1608 Diplexer

PART NUMBER: DPX1608LWFPR2455L

PACKING SPECIFICATION


Peel-off force

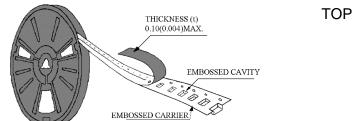

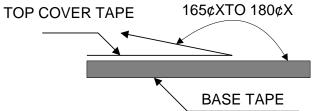

The force for peeling of cover tape is 10 grams in the arrow direction.


Dimension (Unit: mm)



TYPE	А	В	С	D	E	F
8 mm	178±1	60+0.5 -0	-	13±0.2	9±0.5	12±0.5
12 mm	178±0.3	60±0.2	19.3±0.1	13.5±0.1	13.6±0.1	-

Taping quantity

SERIES	5824 5724	5320 5220	4532	4516	3225	3216 2520	2012 1608	1005 0605
PCS/Reel	5000	3000	1000	2000	2500	3000	4000	10000

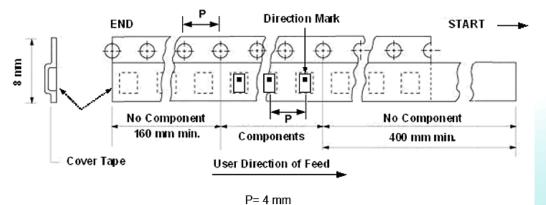

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION





Description: 1608 Diplexer

PART NUMBER: DPX1608LWFPR2455L

		REVISION HISTORY	
Revision	Date	Description	
Version 1	Jun. 22, 2022	- New issue	