



# LOADING PATTERN MATING SIDE

f	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
e	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	5	5	5	4	4	4	4	4
d	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	5	4	4	4	4	4	4	4
c	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
b	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
a	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
z	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
P	0																						
S	1																						


# LOADED CONNECTOR ASSEMBLY (FOR EXAMPLE)

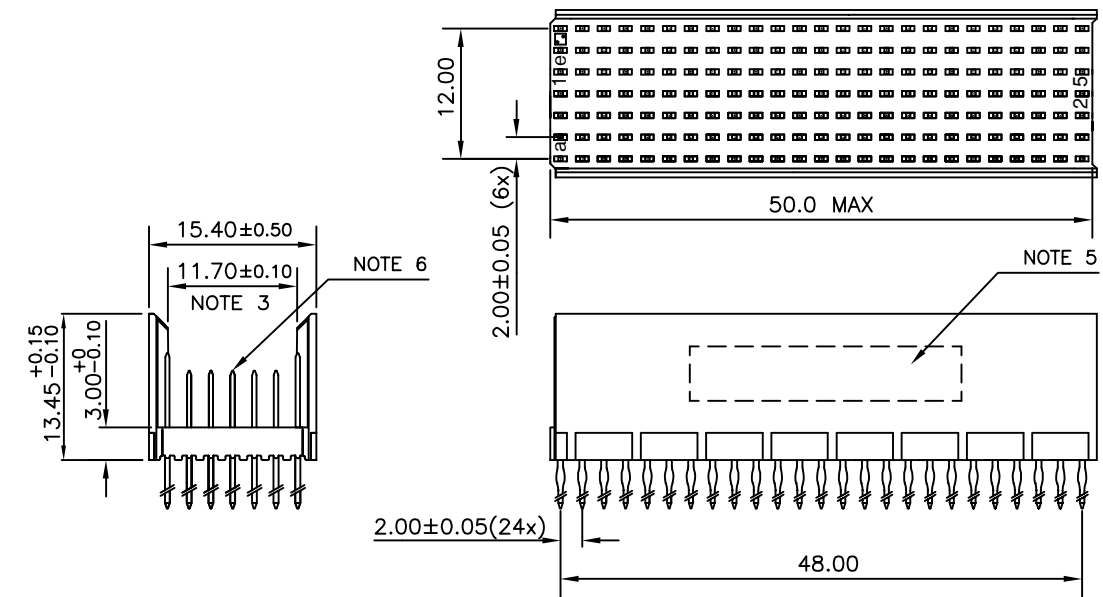

# CONTACT OVERVIEW

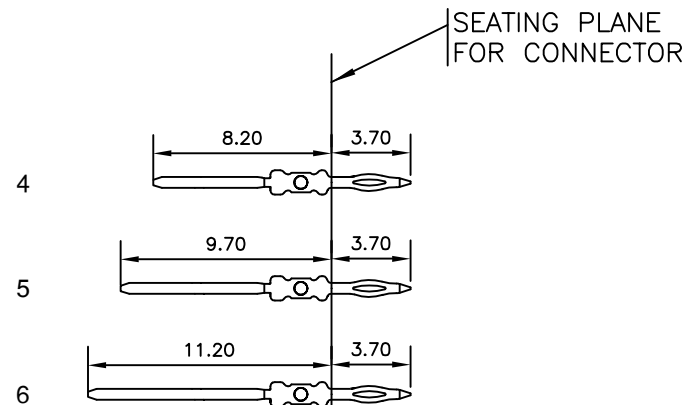

# LAY-OUT P.C.B.-HOLE

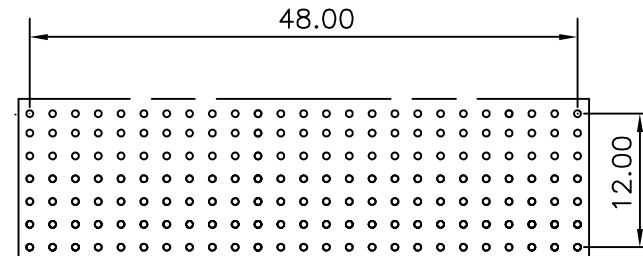

HM2P08PDU2M1




LEAD FREE INDICATOR : LF = LEAD FREE  
(DIGIT 15 & 16)

PLATING CODE (DIGIT 13 AND 14)  
(REF DRW NO. BS,C , 201844 , 003)

# NOTES

- THIS PRODUCT IS CSA APPROVED.
- THIS PRODUCT IS UL RECOGNIZED.
- MEASURED AT THE BOTTOM.
- MATERIAL CONTACT: PHOSPHORBRONZE  
HOUSING: CREAM WHITE GLASS FILLED POLYESTER UL-94V0
- CONNECTOR PRINTED WITH P/N AND DATE CODE.
- FOR ACTUAL CONTACT LOADINGS, SEE LOADING PATTERN MATING SIDE.
- SHAPE OF CONNECTOR HOUSING CAN ALTER DEPENDING ON PRODUCTION LOCATION
- THE PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
- FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING : BS, A , 201572 , 001

CATALOG NO: HM2P08PDU2M1----

mat'l. code SEE NOTE 4				surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection 		product family MILLIPACS					
ltr	ecn no	dr	date	tolerances unless otherwise specified								title			
A	I03-0030	JAY	04/07/2003	angles  linear				.0±0.2				MPACS 5+2R STR HDR PF CONN TYPE B			
B	I05-0171	MINI	23/09/2005					.00±0.1							
C	I06-0077	MINI	22/06/2006			0°±1°		.000±.00X							
				dr	JAYADEEP P		03/07/2003				dwg no	sheet 1 of 1		size	
				engr	BIJU K PAUL		03/07/2003				BS, C ,203028, 048	A3			
				chr	BIJU K PAUL		22/06/2006								
				appd	K V SIVADAS		22/06/2006				type	Product	Customer	Drawing	
sheet index		revision sheet		c	1										