

Features

Unregulated Converters

- 1:1 Input Range
- Efficiency up to 84%
- 2kVDC and 3kVDC Isolation Option
- Approved for Medical Applications
- -40°C to +90°C Operating Temperature Range
- 2W SMD Package

Selection Guide

Part Number SMD	Isolation Voltage (kV)	Input Voltage (VDC)	Output Voltage (VDC)	Output Current (mA)	Efficiency (max.)	Capacitive Load (max.) ⁽¹⁾
RTM-0505S*	2	5	5	400	79%	2200µF
RTM-1205S*	2	12	5	400	83%	2200µF
RTM-2405S*	2	24	5	400	84%	2200µF

* add Suffix "/H" for 3kVDC/1sec. Isolation e.g. RTM-0505S/H

* add Suffix "-R" for tape&reel packing e.g. RTM-1205S-R or RTM-2405S/H-R

Specifications (measured at $T_A = 25^\circ\text{C}$, nominal input voltage and rated output current unless otherwise specified)

Input Voltage Range	$\pm 10\%$ max.	
Output Voltage Accuracy	-1% typ., $\pm 5\%$ max.	
Line Voltage Regulation	(low line to high line at max. load)	1.2% typ.
Load Voltage Regulation	(10% to 100% full load)	10% typ., 15% max.
Output Ripple and Noise (20MHz BW limited)	50mVp-p typ., 100mVp-p max.	
Operating Frequency (V_{in} =nominal input)	20kHz min. / 40kHz typ. / 80kHz max.	
Efficiency at Full Load	see Selection Guide	
Minimum Load = 0%	Specifications valid for 10% minimum load only	
Isolation Voltage	(tested for 1 second)	2000 VDC
	(rated for 1 minute**)	1600VDC
Isolation Voltage	H-Suffix (tested for 1 second)	3000 VDC
	H-Suffix (rated for 1 minute**)	2400VDC
Isolation Capacitance	30pF typ., 50pF max.	
Isolation Resistance	(Viso=500V)	15GΩ min.
Short-Circuit Protection	1 second	
Operating Temperature Range	with Derating	-40°C to +90°C
Storage Temperature	-55°C to +125°C	
Reflow Temperature	RoHS compliant	245°C (30 sec.), Peak 255°C (5sec.) max.
Vapor Phase Process	(for more details see Application Notes)	230°C (90 sec.) max.
Relative Humidity	95% RH	
Package Weight	1.4g	
Packing Quantity	All Types	27 pcs per Tube
	All Types	500 pcs per Reel
MTBF (+25°C)	} Detailed Information see Application Notes chapter "MTBF"	using MIL-HDBK 217F 3907 x 10 ³ hours
MTBF (+85°C)		using MIL-HDBK 217F 313 x 10 ³ hours

Certifications

EN Medical Safety	Report: MDD1112018 + RM1112018 Medical Report + ISO14971 Risk Assessment	IEC/EN 60601-1 3rd Edition
EN General Safety	Report: SPCLVD1112018	EN60950-1, 2nd Edition

Note:

Note1: Maximum capacitive load is defined as the capacitive load that will allow start up in under 1 second without damage to the converter

ECONOLINE
DC/DC-Converter

RECOM


2 Watt SMD Single Output



EN-60601-1 Certified
EN-60950-1 Certified

RTM

Derating-Graph (Ambient Temperature)

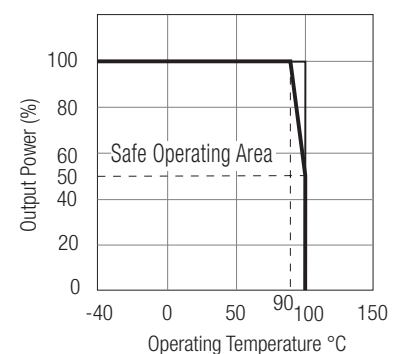

**Any data referred to in this datasheet are of indicative nature and based on our practical experience only. For further details, please refer to our Application Notes.

Refer to Application Notes



ECONOLINE

DC/DC-Converter


RTM Series

Typical Characteristics




RTM-xx05S

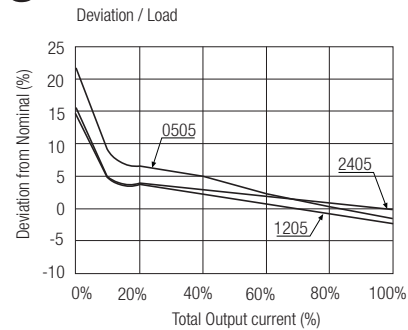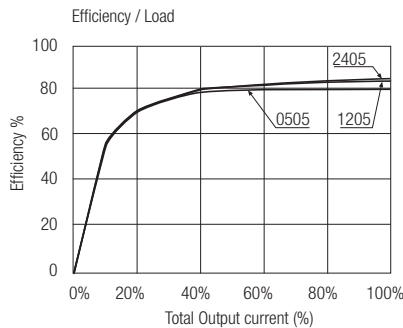


Tolerance Envelope



Package Style and Pinning

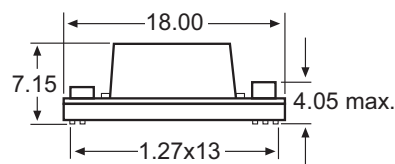

Recommended Footprint Details




Pin Connections

Pin #	Function
1	+Vin
2	-Vin
12	-Vout
13	+Vout
14~17	NC
27,28	NC
NC = No Connection	

Unit: mm
Tolerance: ± 0.25 mm

EMC Filtering - Suggestion for EN55022 Class B

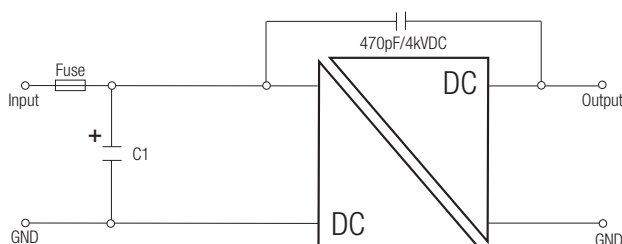

Input Voltage	Inductance/Capacitance (C1)
5V	4.7 μ F
12V	2.2 μ F
24V	47 μ F

The product information and specifications are subject to change without prior notice. RECOM products are not authorized for use in safety-critical applications (such as life support) without RECOM's explicit written consent. A safety-critical application is defined as an application where a failure of a RECOM product may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The buyer shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.