

# VC-MP-K1 - Housing

1884568

<https://www.phoenixcontact.com/us/products/1884568>



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Housing, Range of articles: VARIOCON, design: VC1, housing material: Zinc die-cast, color: gray, When using fiber optics, the bending radii of the cable manufacturers must be observed.

## Your advantages

- Any position can be a PE contact

## Commercial data

Item number	1884568
Packing unit	5 pc
Minimum order quantity	5 pc
Sales key	AB01
Product key	ABLADB
Catalog page	Page 31 (C-2-2013)
GTIN	4017918164591
Weight per piece (including packing)	369.76 g
Weight per piece (excluding packing)	352 g
Customs tariff number	85389099
Country of origin	PL

## Technical data

## Notes

General	When using fiber optics, the bending radii of the cable manufacturers must be observed.
General	The coupling housings may not be used in combination with the VC-D... contact carriers

## Safety note

Safety note	<p>WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.</p> <ul style="list-style-type: none"><li>• WARNING: Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible.</li><li>• WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.</li><li>• The products are suitable for applications in plant, controller, and electrical device engineering.</li><li>• When operating the connectors in outdoor applications, they must be separately protected against environmental influences.</li><li>• Assembled products may not be manipulated or improperly opened.</li><li>• Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at <a href="https://www.phoenixcontact.com/products">phoenixcontact.com/products</a>).</li><li>• When using the product in direct connection with third-party manufacturers, the user is responsible.</li><li>• For operating voltages &gt; 50 V AC, conductive connector housings must be grounded</li><li>• Ensure that the protective or functional ground has been properly connected.</li><li>• VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector</li><li>• Observe the corresponding technical data. You will find information:<ul style="list-style-type: none"><li>o On the product</li><li>o On the packing label</li><li>o In the supplied documentation</li><li>o Online at <a href="https://www.phoenixcontact.com/products">phoenixcontact.com/products</a> under the product</li></ul></li><li>• Only use tools recommended by Phoenix Contact</li><li>• The installation notes/Design In documents online on the download page at <a href="https://www.phoenixcontact.com/products">phoenixcontact.com/products</a> must be observed for this product.</li><li>• Use a protective cap to protect connectors that are not in use. The suitable accessories are available online in the accessory</li></ul>
-------------	--

# VC-MP-K1 - Housing

1884568

<https://www.phoenixcontact.com/us/products/1884568>




	section of the product at <a href="https://www.phoenixcontact.com/products">phoenixcontact.com/products</a>
	• Operate the connector only when it is fully plugged in.
	• Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards.
	• Observe the minimum bending radius of the cable. Lay the cable without twisting it.
	• The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12).

## Product properties

Product type	Sleeve housings
Product family	VARIOCON
Type	VC1
No. of cable outlets	1
Number of module slots	2
Type of the screw connection	1x Pg16
Shielded	no
Cable outlet	lateral

## Dimensions

Dimensional drawing	
Width	36.4 mm
Height	61 mm
Length	62.6 mm
Thread type on seal side	Pg16

## Material specifications

Color	gray
Color of the housing part	gray
Material	Die-cast zinc
Housing material	Zinc die-cast
O-ring material	NBR

## Mechanical properties

Mechanical data	
Type of the screw connection	1x Pg16
Locking type	Nut

## Environmental and real-life conditions

Ambient conditions
--------------------

# VC-MP-K1 - Housing

1884568

<https://www.phoenixcontact.com/us/products/1884568>



Degree of protection	IP65/IP66/IP67
Ambient temperature (operation)	-40 °C ... 125 °C

## VC-MP-K1 - Housing


1884568

<https://www.phoenixcontact.com/us/products/1884568>



## Drawings

## Dimensional drawing

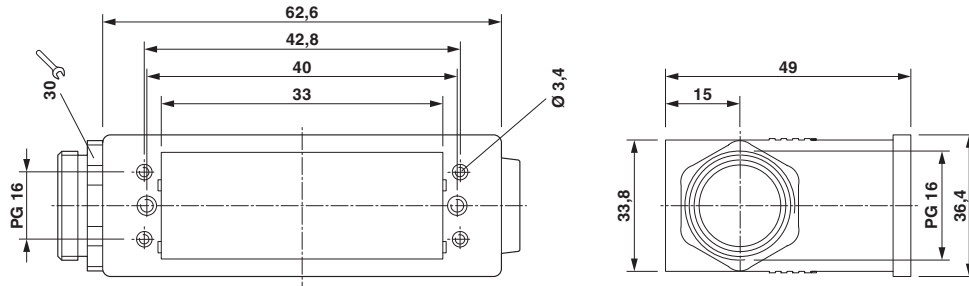

# VC-MP-K1 - Housing



1884568

<https://www.phoenixcontact.com/us/products/1884568>

## Classifications

### ECLASS

ECLASS-11.0	27440202
ECLASS-12.0	27440202
ECLASS-13.0	27440202

### ETIM

ETIM 9.0	EC000437
----------	----------

### UNSPSC

UNSPSC 21.0	31261500
-------------	----------

# VC-MP-K1 - Housing

1884568

<https://www.phoenixcontact.com/us/products/1884568>



## Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

# VC-MP-K1 - Housing

1884568

<https://www.phoenixcontact.com/us/products/1884568>




## Accessories

### VC-BZS WH - Marking label

1852875

<https://www.phoenixcontact.com/us/products/1852875>



Marker labels, unprinted, 5-section, for individual labeling with M-PEN or CMS system, white

---

### VC-M-KV-PG16( 4- 6,5) - Half screw connection

1853942

<https://www.phoenixcontact.com/us/products/1853942>



Half screw connection Pg16, made of metal, consisting of rubber seal with one hole and one pressure screw, for type 1 housings, cable [mm] 4 - 6.5



# VC-MP-K1 - Housing

1884568

<https://www.phoenixcontact.com/us/products/1884568>



## VC-M-KV-PG16( 6,5- 9,5) - Half screw connection

1853968

<https://www.phoenixcontact.com/us/products/1853968>



Half screw connection Pg16, made of metal, consisting of rubber seal with one hole and one pressure screw, for type 1 housings, cable [mm] 6.5 - 9.5

---

## VC-M-KV-PG16( 9-13) - Half screw connection

1853984

<https://www.phoenixcontact.com/us/products/1853984>



Half screw connection Pg16, made of metal, consisting of rubber seal with one hole and one pressure screw, for type 1 housings, cable [mm] 9 - 13

# VC-MP-K1 - Housing

1884568

<https://www.phoenixcontact.com/us/products/1884568>



## VC-M-KV-PG16(11,5-15,5) - Half screw connection

1854857

<https://www.phoenixcontact.com/us/products/1854857>



Half screw connection Pg16, made of metal, consisting of rubber seal with one hole and one pressure screw, for type 1 housings, cable [mm] 11.5 - 15.5

---

## VC-M-KV-PG16 1X6/1X8 - Cable gland

1885473

<https://www.phoenixcontact.com/us/products/1885473>



Multiple screw connection Pg16, made of metal, consisting of rubber seal with several holes (1 x 6 mm/1 x 8 mm) and a pressure screw, for cable screw connection support VC-M-KV-PG16.....

# VC-MP-K1 - Housing

1884568

<https://www.phoenixcontact.com/us/products/1884568>



## VC-M-KV-PG16 1X5/2X6 - Cable gland

1885509

<https://www.phoenixcontact.com/us/products/1885509>



Multiple screw connection Pg16, made of metal, consisting of rubber seal with several holes (1 x 5 mm/2 x 6 mm) and a pressure screw, for cable screw connection support VC-M-KV-PG16.....

---

## VC-M-KV-PG16 3X7 - Cable gland

1885525

<https://www.phoenixcontact.com/us/products/1885525>



Multiple screw connection Pg16, made of metal, consisting of rubber seal with several holes (3 x 7 mm) and a pressure screw, for cable screw connection support VC-M-KV-PG16.....

# VC-MP-K1 - Housing

1884568

<https://www.phoenixcontact.com/us/products/1884568>



## VC-M-KV-PG16( 5- 8) - Half screw connection

1853955

<https://www.phoenixcontact.com/us/products/1853955>



Half screw connection Pg16, made of metal, consisting of rubber seal with one hole and one pressure screw, for type 1 housings, cable [mm] 5 - 8

---

## VC-M-KV-PG16( 7-10,5) - Half screw connection

1853971

<https://www.phoenixcontact.com/us/products/1853971>



Half screw connection Pg16, made of metal, consisting of rubber seal with one hole and one pressure screw, for type 1 housings, cable [mm] 7 - 10.5

# VC-MP-K1 - Housing

1884568

<https://www.phoenixcontact.com/us/products/1884568>



## VC-M-KV-PG16 1X3/1X9 - Cable gland

1885460

<https://www.phoenixcontact.com/us/products/1885460>



Multiple screw connection Pg16, made of metal, consisting of rubber seal with several holes (1 x 3 mm/1 x 9 mm) and a pressure screw, for cable screw connection thread VC-M-KV-PG16.....

---

## VC-M-KV-PG16 1X3/2X8 - Cable gland

1885499

<https://www.phoenixcontact.com/us/products/1885499>



Multiple screw connection Pg16, made of metal, consisting of rubber seal with several holes (1 x 3 mm/2 x 8 mm) and a pressure screw, for cable screw connection support VC-M-KV-PG16.....

# VC-MP-K1 - Housing

1884568

<https://www.phoenixcontact.com/us/products/1884568>



## VC-M-KV-PG16 2X6/1X7 - Cable gland

1885512

<https://www.phoenixcontact.com/us/products/1885512>



Multiple screw connection Pg16, made of metal, consisting of rubber seal with several holes (2 x 6 mm/1 x 7 mm) and a pressure screw, for cable screw connection support VC-M-KV-PG16.....

---

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)