MICRO SWITCH
a Honeywell Division
FED.MFG.CODE 91929

SWITCH – BASIC

CATALOG LISTING
V7–4S27D8
CW–C4155

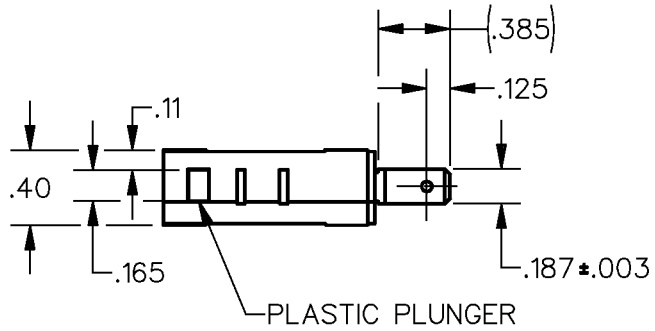

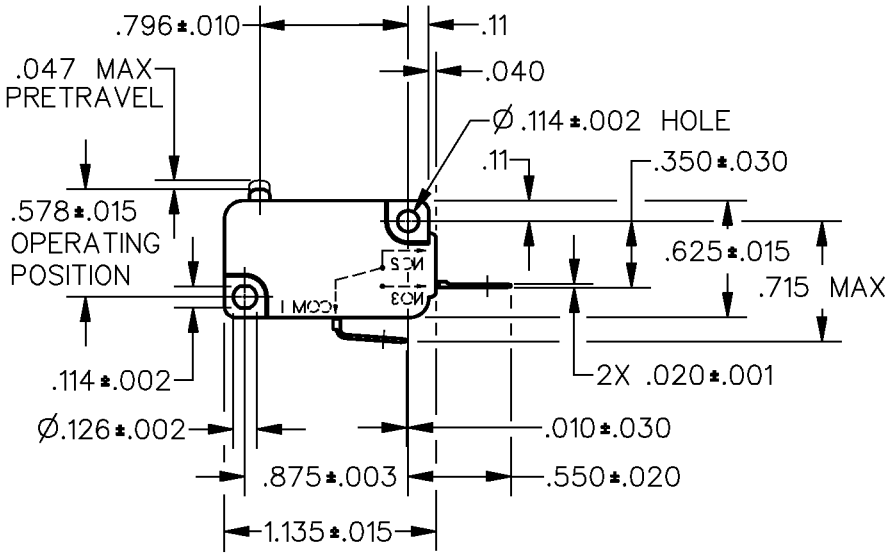

NOTES
1 – IN INSPECTION, DO NOT BURN OUT – GOLD CONTACTS
2 – IN INSPECTION, DO NOT EXCEED 10 VDC, .1A RESISTIVE LOAD

ANSI Y14.5M–1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL / DO NOT SCALE PRINT
OPERATING FORCE — — — 25 GRAMS MAX	CONTACT ARRANGEMENT S P N O	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
DIFFERENTIAL TRAVEL — — — .002–.010		ONE PLACE (.0) ±.030
OVERTRAVEL — — — — — — .050 MIN		TWO PLACE (.00) ±.015
FREE POSITION — — — — .625 MAX	L142 0.1A 125 VAC	THREE PLACE (.000) ±.005
RELEASE TRAVEL — — — — .010 MIN		ANGLES ±
		WEIGHT

CATALOG LISTING V7–4S27D8
PAGE 1 OF 1
ISSUE 2
REPLACES X100135–V7
RELEASE NO. PR–22070

REVISIONS
A CO–93311 TSM 26 OCT 98

CHECK
CHECK
CHECK
CHECK
DRAWN DCS 24 FEB 96

FORMTEK

Downloaded from Arrow.com.