

VEU Series

Features

- $4\phi \sim 18\phi$, 105°C, 3,000 ~ 5,000 hours assured
- Long life assured
- Designed for surface mounting on high density PC board
- RoHS compliance
- AEC-Q200 qualified



Marking color: Black

Specifications

Items	Performance																																												
Category Temperature Range	6.3 ~ 100V					160 ~ 400V					450V																																		
	-55℃ ~ +105℃					-40℃ ~ +105℃					-25℃ ~ +105℃																																		
Capacitance Tolerance	±20% (at 120 Hz, 20℃)																																												
Leakage Current (at 20℃)	Rated Voltage		6.3 ~ 100V					160 ~ 450V																																					
	Time		after 2 minutes					after 5 minutes																																					
	Leakage Current		I = 0.01CV or 3 (μA), whichever is greater					I = 0.04CV + 100 (μA)																																					
Where, C = rated capacitance in μF, V = rated DC working voltage in V																																													
Tanδ (at 120 Hz, 20℃)	<table><tr><td>Rated Voltage</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td><td>80</td><td>100</td><td>160</td><td>200</td><td>250</td><td>400</td><td>450</td></tr><tr><td>Tanδ (max)</td><td>0.30</td><td>0.24</td><td>0.20</td><td>0.16</td><td>0.13</td><td>0.12</td><td>0.09</td><td>0.08</td><td>0.07</td><td>0.15</td><td>0.15</td><td>0.15</td><td>0.20</td><td>0.20</td></tr></table>															Rated Voltage	6.3	10	16	25	35	50	63	80	100	160	200	250	400	450	Tanδ (max)	0.30	0.24	0.20	0.16	0.13	0.12	0.09	0.08	0.07	0.15	0.15	0.15	0.20	0.20
	Rated Voltage	6.3	10	16	25	35	50	63	80	100	160	200	250	400	450																														
Tanδ (max)	0.30	0.24	0.20	0.16	0.13	0.12	0.09	0.08	0.07	0.15	0.15	0.15	0.20	0.20																															
Low Temperature Characteristics (at 120 Hz)	Impedance ratio shall not exceed the values given in the table below.																																												
	Rated Voltage		6.3	10	16	25	35	50	63	80	100	160	200	250	400	450																													
	Impedance Ratio	Z(-25℃)/Z(+20℃)	4	3	2	2	2	2	2	2	2	3	3	3	6	6																													
Z(-55/-40℃)/Z(+20℃)		10	7	5	3	3	3	3	3	3	6	6	6	10	-																														
Endurance	Test Time		3,000 Hrs for ϕ D ≤ 10 mm; 5,000 Hrs for ϕ D ≥ 12.5 mm																																										
	Capacitance Change		Within ±30% of initial value																																										
	Tanδ		Less than 300% of specified value																																										
	Leakage Current		Within specified value																																										
* The above specifications shall be satisfied when the capacitors are restored to 20℃ after the rated voltage applied for 3,000 ~ 5,000 hours at 105℃.																																													
Shelf Life Test	Test Time		1,000 Hrs																																										
	Capacitance Change		Within ±30% of initial value																																										
	Tanδ		Less than 300% of specified value																																										
	Leakage Current		Within specified value																																										
* The above specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for 1,000 hours at 105℃ without voltage applied.																																													
Ripple Current and Frequency Multipliers	Frequency (Hz)		50	120	1k	10k up																																							
	Cap.(μF)		0.70	1.00	1.30	1.40																																							
	1,000 < C ≤ 1,500		0.85	1.00	1.13	1.15																																							

Diagram of Dimensions

Fig. 1


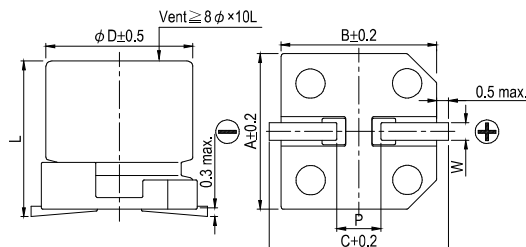


Fig. 2

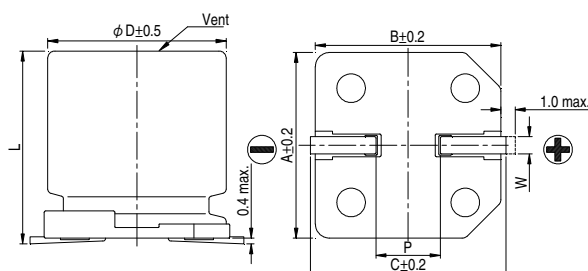


Lead Spacing and Diameter

Unit: mm


ϕD	L	A	B	C	W	P ± 0.2	Fig. No.
4	5.7 $\pm$ 0.3	4.3	4.3	5.1	0.5 ~ 0.8	1.0	1
5	5.7 $\pm$ 0.3	5.3	5.3	5.9	0.5 ~ 0.8	1.5	1
6.3	5.7 $\pm$ 0.3	6.6	6.6	7.2	0.5 ~ 0.8	2.0	1
6.3	7.7 $\pm$ 0.3	6.6	6.6	7.2	0.5 ~ 0.8	2.0	1
8	10 $\pm$ 0.5	8.3	8.3	9.0	0.7 ~ 1.1	3.1	1
10	10 $\pm$ 0.5	10.3	10.3	11.0	0.7 ~ 1.3	4.7	1
12.5	13.5 $\pm$ 0.5	13.0	13.0	13.7	1.1 ~ 1.4	4.4	2
12.5	16 $\pm$ 0.5	13.0	13.0	13.7	1.1 ~ 1.4	4.4	2
16	16.5 $\pm$ 0.5	17.0	17.0	18.0	1.1 ~ 1.4	6.4	2
16	21.5 $\pm$ 0.5	17.0	17.0	18.0	1.1 ~ 1.4	6.4	2
18	16.5 $\pm$ 0.5	19.0	19.0	20.0	1.1 ~ 1.4	6.4	2
18	21.5 $\pm$ 0.5	19.0	19.0	20.0	1.1 ~ 1.4	6.4	2

Marking


$\phi D \leq 6.3 \text{ mm}$



$\phi D = 8 \sim 10 \text{ mm}$



$\phi D \geq 12.5 \text{ mm}$



Dimension and Permissible Ripple Current

Dimension: $\phi D \times L(\text{mm})$

Ripple Current: mA/rms at 120 Hz, 105°C

Rated Volt. (Voc)	6.3V (0J)	10V (1A)	16V (1C)	25V (1E)	35V (1V)	50V (1H)	63V (1J)	80V (1K)
Cap. (μF) Contents	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA
1 010						4×5.7	8	
2.2 2R2						4×5.7	12	
3.3 3R3						4×5.7	17	
4.7 4R7					4×5.7	16	5×5.7	22
10 100			4×5.7	18	5×5.7	27	5×5.7	32
22 220	4×5.7	22	4×5.7	22	5×5.7	30	6.3×5.7	44
33 330	5×5.7	35	5×5.7	35	6.3×5.7	48	6.3×5.7	50
47 470	5×5.7	38	6.3×5.7	50	6.3×5.7	50	6.3×7.7	63
100 101	6.3×5.7	69	6.3×7.7	81	6.3×7.7	81	8×10	116
150 151							10×10	151
220 221	6.3×7.7	120	8×10	141	8×10	141	10×10	290
330 331	8×10	141	10×10	290	10×10	290	10×10	320
470 471	10×10	320	10×10	320	10×10	320	12.5×16	410
1,000 102	10×10	410					16×16.5	690
1,500 152							18×16.5	900

Rated Volt. (Vdc)		100V (2A)		160V (2C)		200V (2D)		250V (2E)		400V (2G)		450V (2W)	
Cap. (μF)	Contents	φ D×L	mA	φ D×L	mA	φ D×L	mA	φ D×L	mA	φ D×L	mA	φ D×L	mA
3.3	3R3											12.5×13.5	40
4.7	4R7							12.5×13.5	65	12.5×16	50	12.5×16	50
10	100					12.5×13.5	80	12.5×16	105	16×16.5	85	16×16.5	85
22	220					12.5×16	105	16×16.5	180	18×21.5	130	18×21.5	130
33	330			12.5×13.5	95	16×16.5	220	18×16.5	230				
47	470			16×16.5	260	18×16.5	270	18×21.5	280				
68	680	12.5×13.5	180	18×16.5	320	18×21.5	330						
100	101	12.5×16	240	16×21.5	380								
150	151	16×16.5	340										
220	221	16×16.5	410										
330	331	18×16.5	540										

Part Numbering System

VEU Series	470μF	±20%	6.3V	Carrier Tape	10 ϕ × 10L	Pb-free and Coated Case
VEU	471	M	0J	TR	-	1010
Series Name	Capacitance	Capacitance Tolerance	Rated Voltage	Package Type	Terminal Type	Case Size
						Lead Wire and Case Type

Note: For more details, please refer to "Part Numbering System - SMD Type" on page 106.