

CO2520 SERIES: 2.5 x 2.0 mm CLOCK OSCILLATOR

■ FEATURES

- ✓ ULTRA SMALL PACKAGE
- ✓ LOW SUPPLY VOLTAGE 1.8 AND 2.5 VDC AVAILABLE
- ✓ STANDBY FUNCTION

■ APPLICATIONS

- ✓ PRINTER SCANNER
- ✓ VGA CARD
- ✓ DVD
- ✓ DSC, DVC



■ ELECTRICAL SPECIFICATION

PARAMETER		VALUE			
Frequency Range		0.750 ~ 75.000 MHz			
Operating Temperature Range		-20°C to +70°C		-40°C to +85°C	
Frequency Stability ¹ **		±25 ppm ±30 ppm		±50 ppm ±100 ppm	
Storage Temperature Range		-40°C to +85°C			
Supply Voltage (Vcc)		1.8V ±5%	2.5V ±5%	3.0V ±5%	3.3V ±5%
Supply Current		2.5 mA max ~29 MHz 3.0 mA max ~39 MHz 3.5 mA max ~50 MHz 4.0 mA max ~75MHz	4.5 mA max ~29 MHz 5.5 mA max ~39 MHz 6.5 mA max ~50 MHz 7.5 mA max ~75MHz	5.5 mA max ~29 MHz 6.5 mA max ~39 MHz 7.5 mA max ~50 MHz 8.5 mA max ~75MHz	2.5 mA max ~29 MHz 3.5 mA max ~39 MHz 4.5 mA max ~50 MHz 5.5 mA max ~75MHz
Output CMOS	Symmetry	40% to 60% at 50% Vdd (45% to 55% Available)			
	Rise / Fall Time	10 nsec max at 10% to 90% Vdd			
	Logic “0” Level	Vcc x 0.1 V max			
	Logic “1” Level	Vcc x 0.9 V min			
	Load	15 pF max			
Enable / Disable Function		Pin 1: High or Open >> Output enabled Pin 3 Pin 1: Low >> Output disabled (High impedance)			
Start-up Time		10 ms Max			

** Inclusive of 25°C tolerance, operating temperature range, voltage or load changes, aging, shock and vibration, consult factory for tighter stability options.


NOTES

¹ Not available at all frequencies, Contact Factory

² Check part numbering table below. For others contact factory.

CO2520 SERIES: 2.5 x 2.0 mm CLOCK OSCILLATOR

MECHANICAL SPECIFICATION (4 pin ceramic package)

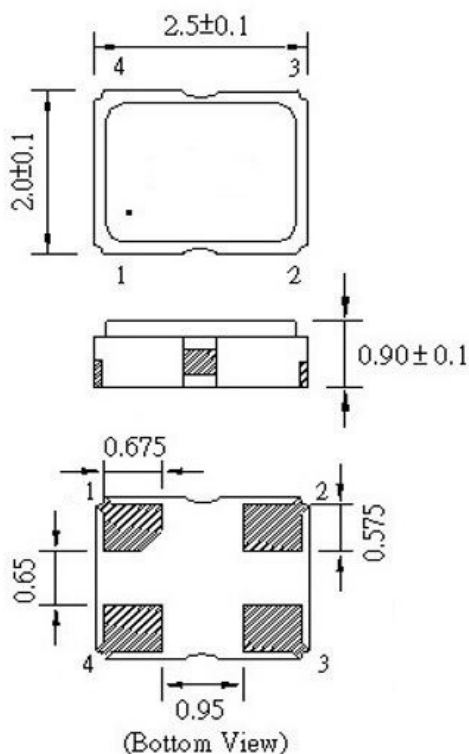

Pin Connections:

- 1 – Enable / Disable
- 2 – Ground
- 3 – Output
- 4 – Vcc

PART NUMBERING SYSTEM


TYPE	SERIES	-	FREQUENCY (MHz)	-	SUPPLY VOLTAGE (Vcc)	-	STABILITY (PPM)	-	TEMPERATURE RANGE	-	SYMMETRY (Duty Cycle)	-	TAPE & REEL
Clock Oscillator	2520	-	0.750 ~ 75.000	-	18: Vcc=1.8 25: Vcc=2.5 30: Vcc=3.0 33: Vcc=3.3	-	25: ±25 ppm 30: ±30 ppm 50: ±50 ppm 100: ±100 ppm	-	blank: -20°C to +70°C X: -40°C to +85°C	-	blank: 40 to 60% T: 45 to 55%	-	TR
CO	2520	-	12.800	-	25	-	50	-		-		-	TR

EXAMPLE: CO2520-12.800-25-50-TR

Surface Mount CO2520, 2.5 x 2.0 mm, 12.800 MHz, 2.5 VDC Supply Voltage, ±50 ppm Overall Stability, from -20°C to +70°C, Symmetry 40% to 60%, Tape and reel packaging.

CO2520 SERIES: 2.5 x 2.0 mm CLOCK OSCILLATOR

REFLOW PROFILE

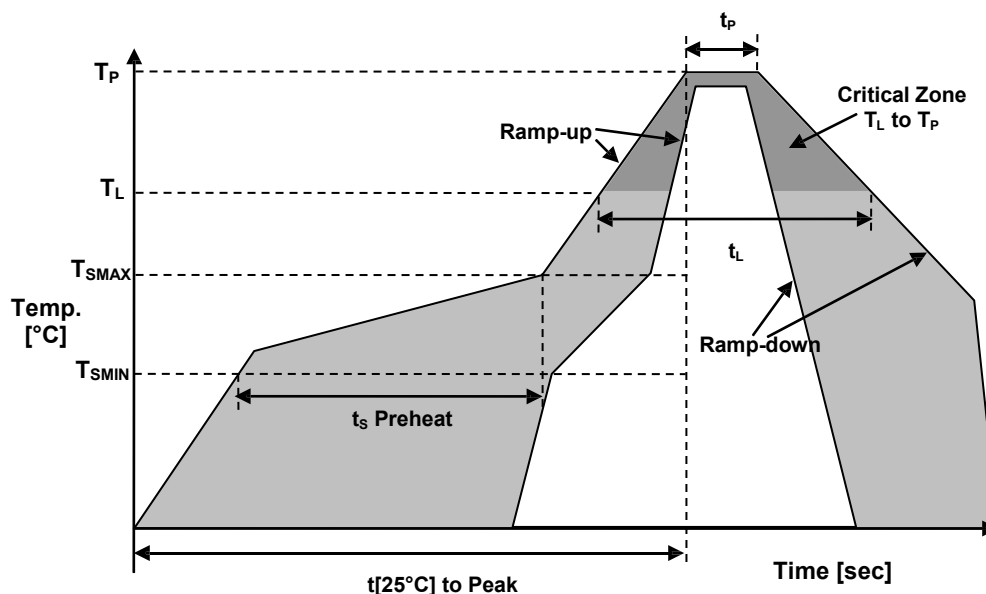

Reflow profile		
Temperature Min Preheat	T_{SMIN}	150°C
Temperature Max Preheat	T_{SMAX}	200°C
Time (T_{SMIN} to T_{SMAX})	t_s	60-180 sec.
Temperature	T_L	217°C
Peak Temperature	T_P	260°C
Ramp-up rate	R_{UP}	3°C/sec max.
Ramp-down rate	R_{DOWN}	6°C/sec max.
Time within 5°C of Peak Temperature	t_p	10 sec.
Time $t[25^\circ\text{C}]$ to Peak Temperature	$t[25^\circ\text{C}]$ to Peak	480 sec.
Time	t_L	60-150 sec.

ENVIRONMENTAL

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	1
REACH SVHC	COMPLIANT
RoHS	6/6 LEAD FREE
TERMINATION FINISH	Au

