


➤ ETX-VE



original size

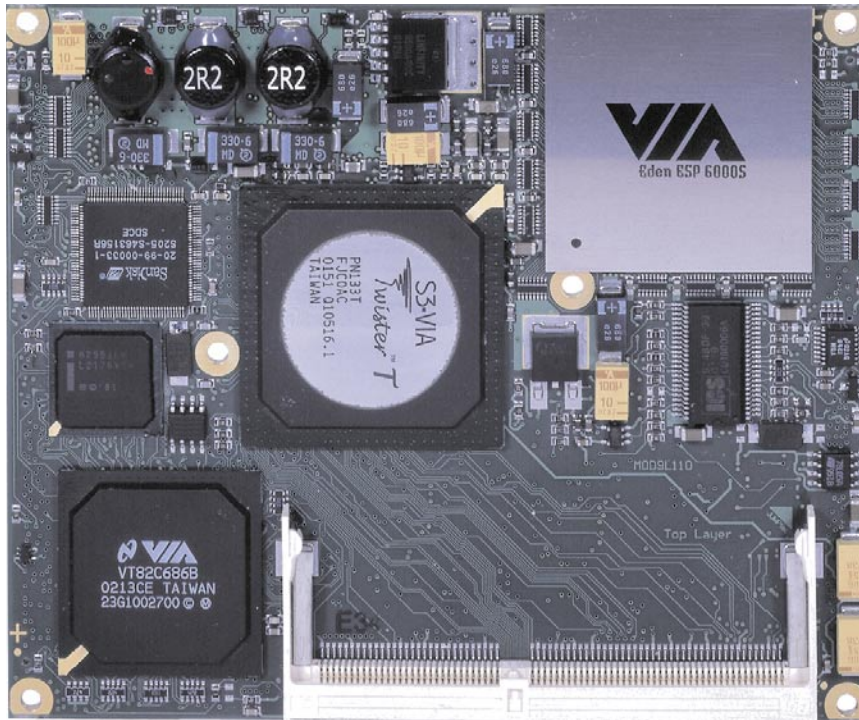

➤ Embedded Technology eXtended

- Reduced power consumption
- Highly integrated
- Scalable and interchangeable

Product Overview

The new ETX-VE-series of the ETX component SBC module is based on the VIA Eden Platform. Our two standard ETX-VE modules are using the Twister-T™ chipset and ESP4000 and ESP10000 processors. The processors and chipsets are optimized for ultra-low power consumption enabling high-performance boards with passive cooling solutions. Improved power management is achieved using both ACPI and APM 1.2 allowing for fanless-cooling and extending battery life. With the VIA VT8606/ VT82C686A as the core chip set, the ETX-VE-series provides both S3 Savage 4 graphics and VIA enhanced audio. In addition to standard ETX features, the ETX-VE supports four USB ports, up to 512 MByte SDRAM, 10/ 100Base-T Ethernet, keyboard/ mouse controllers, real-time clock, and watchdog timer. ETX

modules are like components, plugging in to an application-specific baseboard. The ETX modules supply the core CPU and memory subsystems together with sound, SVGA, Ethernet and standard PC I/O. They connect to the rest of the embedded system through high-density, low profile, surface-mount connectors, which carry both ISA and PCI bus signals as well as dedicated I/O interfaces. The mechanics of the interconnection is such that an ETX/ baseboard combination is virtually the same in height as a one-board solution. ETX modules are scaleable and interchangeable, and they make possible the rapid development of semi-custom solutions for embedded applications.

...always a Jump ahead!

Technical Information

Processor	VIA Eden Platform Processors ESP4000 (400 MHz, ETX-VE4) ESP10000 (1 GHz, ETX-VE10)
DRAM	512 MByte SDRAM
Harddisk	Two enhanced IDE ports
Sound	SoundBlaster™ compatible, Line-level input/output and Microphone
Video Controller	Savage S4 (VT8606) AGP controller LVDS Flatpanel and CRT output, up to 32 MByte UMA Video RAM
Resolutions CRT and LCD	VGA 640x480 32 Bit, SVGA 800x600 32 Bit, XGA 1024x768 32 Bit, SXGA 1280x1024 32 Bit, UXGA 1600x1200 32 Bit
LCD Panel Support	Dual Channel LVDS 110 MHz
Serial Interfaces	2x TTL (16550 compatible), IrDA support

Enhanced Parallel Port	shared with Floppy
Floppy Port	shared with LPT
Ethernet	10/ 100Base-T Intel® 82551ER
USB	4x USB 1.1 OHCI ports
Expansions	ETX Interface
Dimensions	95 x 114 mm (3.7x4.5")
Power Consumption	8 to 12 W with 400 MHz, 8 to 15 W with 800 MHz
Temperature (*)	operation: 0° to 60°C, storage: -40° to 85°C
Humidity	operation: 10% to 90%, storage: 5% to 95% (non condensing)

(*) see manual for details

Ordering Information

Article	Part.-No.	Description
ETX-VE4	18006-0000-40-0	ETX with VIA ESP 4000
ETX-VE10	18006-0000-10-0	ETX with VIA ESP 10000
HSP-VE (thread)	18006-0000-99-0	Heatspreader for ETX-VE with threaded holes
HSP-VE (through)	18006-0000-99-1	Heatspreader for ETX-VE with through holes

Corporate Offices

Europe, Middle East & Africa

Kontron AG
Oskar-von-Miller-Str. 1
85386 Eching/Munich Germany

Tel.: +49 (0)8165/ 77 777
Fax: +49 (0)8165/ 77 219
sales@kontron-emea.com

North America

Kontron America Corporate Office
14118 Stowe Drive
Poway, CA 92064-7147 USA

Tel.: +1 888 294 4558
Fax: +1 858 677 0898
sales@us.kontron.com

Asia Pacific

Asia Pacific
2nd Floor No. 2, Lane 50,
Nan Kang Road Section 3, Nan Kang
District, Taipei, Taiwan 115

Phone: +886-2-2782-0201
Fax: +886-2-2782-7486
sales@kontron.com.tw

Kontron Embedded Modules GmbH

Brunnwiesenstraße 16
DE-94469 Deggendorf

Tel.: +49 (0)991 370 24-0
Fax: +49 (0)991 370 24-333

sales-kem@kontron.com