

# MEDICAL GRADE ISOLATION POWER TRANSFORMER

# **MD-2000-U**

#### Electrical Specifications (@25C)

1. Maximum Power: 2000VA

Input Voltage (power cord): 120VAC±10%, 50/60Hz
Output Voltage (receptacle): 120.0VAC @ 16.66A Max¹

4. Voltage Regulation: 5% TYP from full load to no load

5. Hipot:

Input to output: 3000VAC

Input and output to enclosure (Ground): 1500VAC

6. Efficiency: 94% TYP. @ full load

7. Operating ambient temperature: Not to exceed 60°C

8. Leakage current: less than 50uA; typical 10uA

9. Fusing: Replace only with 20.0A, 250VAC, slow blo, UL listed fuses. Recommended Littelfuse 0326020.


### **Construction:**

These medical grade isolation boxes are built using a toroidal transformer construction that inherently helps reduce stray fields, increases efficiency and minimizes size compared to traditional EI transformers. Built with Class F (155°) insulation system. The enclosure is made of steel and powder coated white.

#### Safety:

Medical isolation transformer box is certified to UL 60601-1, 2<sup>nd</sup> edition medical standard and CSA-C22.2.No. 601.1M90, 2005

UL: (E352717), UL60601-1, 2<sup>nd</sup> edition and CAN/CSA-C22.2 No. 601.1M90, 2005
UL: (E514503), AAMI/IEC 60601-1:2005 + AMD 1:2012 & CSA CAN/CSA-C22.2 NO. 60601-1:14
Note: Not for use in life critical application




#### Mounting:

Rubber feet for horizontal mounting.

#### **Connections:**

Input: 11ft medical grade power cord with Nema 5-20P plug. Output: Duplex receptacle. Nema 5-20R.

#### **Schematic:**

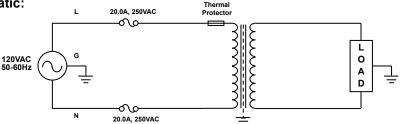

155C


## Please refer to instruction manual for safety precautions.


**RoHS Compliance:** As of manufacturing date February 2016, all standard products meet the requirements of 2015/863/EU, known as the RoHS 3 initiative.

\* Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics' website for the most current version.

Web: www.TriadMagnetics.com Phone 951-277-0757 Fax 951-277-2757

460 Harley Knox Blvd. Perris, California 92571 COPER OF THE PROPERTY OF THE P



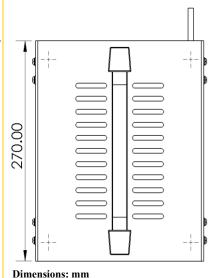

Dimensions: mm Weight: 19.1Kg Warranty: 5 years

Release Date: August 27, 2025

<sup>&</sup>lt;sup>1</sup> Combined loads connected to receptacle(s) must not exceed maximum current rating.