


Color: ■ agate gray

Similar to illustration

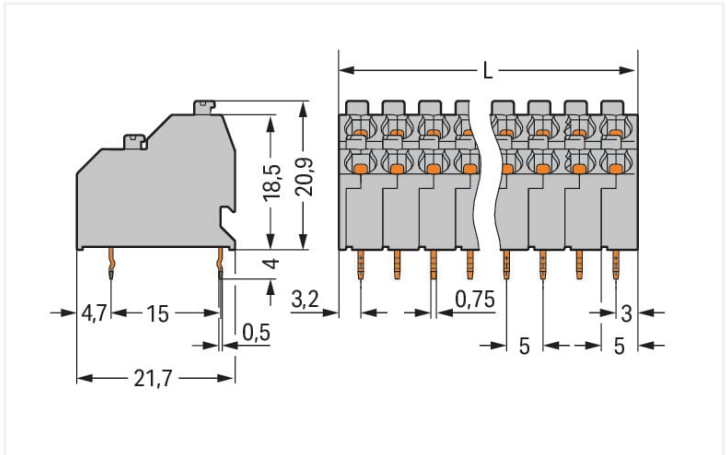

Dimensions in mm
 $L = ((\text{Polzahl} / 2) \times \text{Rastermaß}) + 1,2 \text{ mm}$

PCB terminal block, 250 Series, Push-in CAGE CLAMP®

This PCB terminal block (item number 250-708) is designed to connect conductors quickly and easily. It is ideal for custom installations with different mounting types. This PCB terminal block has a rated voltage of 320 V and can handle currents up to 10 A. Conductors should only be connected to this PCB terminal block if their strip length is between 9 mm and 10 mm. Featuring one conductor terminal along with Push-in CAGE CLAMP®, this connector delivers reliable performance. Push-in CAGE CLAMP® connection technology is ideal for connecting all conductor types. Both solid and fine-stranded conductors with ferrules can be pushed in without the need for tools—all thanks to its pluggable design. The item's dimensions are 41.2 x 24.9 x 21.7 mm (width x height x depth). This PCB terminal block is suitable for conductor cross sections ranging from 0.5 mm² to 1.5 mm². It has two levels. You can connect sixteen potentials / sixteen poles using the sixteen clamping points. The agate gray housing is made of polyamide (PA66) for insulation, the clamping spring is made of chrome-nickel spring steel (CrNi), and the contacts are made of electrolytic copper (ECu). The contact surface is coated with tin. This PCB terminal block is operated with a push-button. The PCB terminal block is designed for THT soldering. Insert the conductor into the board at a 45° angle.. The solder pins are organized over the entire terminal strip (in-line). They are 0.5 x 0.75 mm and 4 mm in length. Each potential has one solder pin.

Notes	
Variants:	Other pole numbers Other colors Direct marking Other versions (or variants) can be requested from WAGO Sales or configured at https://configurator.wago.com/ .

Electrical data			
Ratings per		IEC/EN 60664-1	
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	320 V	320 V	630 V
Rated surge voltage	4 kV	4 kV	4 kV
Rated current	10 A	10 A	10 A
Approvals per		UL 1059	
Use group	B	C	D
Rated voltage	300 V	-	300 V
Rated current	10 A	-	10 A
Approvals per		CSA	
Use group	B	C	D
Rated voltage	300 V	-	300 V
Rated current	10 A	-	10 A



Connection data																						
Clamping units	16	<div>Connection 1</div> <table><tr><td>Connection technology</td><td>Push-in CAGE CLAMP®</td></tr><tr><td>Actuation type</td><td>Push-button</td></tr><tr><td>Solid conductor</td><td>0.5 ... 1.5 mm² / 20 ... 16 AWG</td></tr><tr><td>Fine-stranded conductor</td><td>0.75 ... 1.5 mm²</td></tr><tr><td>Fine-stranded conductor; with insulated ferrule</td><td>0.5 ... 1 mm²</td></tr><tr><td>Fine-stranded conductor; with uninsulated ferrule</td><td>0.5 ... 1 mm²</td></tr><tr><td>Note (conductor cross-section)</td><td>Fine-stranded conductor 0.75 ... 1.5 mm² (I max. 4 A) Fine-stranded conductor 0.5 mm² (I max. 2 A)</td></tr><tr><td>Strip length</td><td>9 ... 10 mm / 0.35 ... 0.39 inches</td></tr><tr><td>Conductor connection direction to PCB</td><td>45 °</td></tr><tr><td>Pole number</td><td>16</td></tr></table>	Connection technology	Push-in CAGE CLAMP®	Actuation type	Push-button	Solid conductor	0.5 ... 1.5 mm² / 20 ... 16 AWG	Fine-stranded conductor	0.75 ... 1.5 mm²	Fine-stranded conductor; with insulated ferrule	0.5 ... 1 mm²	Fine-stranded conductor; with uninsulated ferrule	0.5 ... 1 mm²	Note (conductor cross-section)	Fine-stranded conductor 0.75 ... 1.5 mm² (I max. 4 A) Fine-stranded conductor 0.5 mm² (I max. 2 A)	Strip length	9 ... 10 mm / 0.35 ... 0.39 inches	Conductor connection direction to PCB	45 °	Pole number	16
Connection technology	Push-in CAGE CLAMP®																					
Actuation type	Push-button																					
Solid conductor	0.5 ... 1.5 mm² / 20 ... 16 AWG																					
Fine-stranded conductor	0.75 ... 1.5 mm²																					
Fine-stranded conductor; with insulated ferrule	0.5 ... 1 mm²																					
Fine-stranded conductor; with uninsulated ferrule	0.5 ... 1 mm²																					
Note (conductor cross-section)	Fine-stranded conductor 0.75 ... 1.5 mm² (I max. 4 A) Fine-stranded conductor 0.5 mm² (I max. 2 A)																					
Strip length	9 ... 10 mm / 0.35 ... 0.39 inches																					
Conductor connection direction to PCB	45 °																					
Pole number	16																					
Total number of potentials	16																					
Number of connection types	1																					
Number of levels	2																					

Physical data		
Pin spacing	5 mm / 0.197 inches	
Width	41.2 mm / 1.622 inches	
Height	24.9 mm / 0.98 inches	
Height from the surface	20.9 mm / 0.823 inches	
Depth	21.7 mm / 0.854 inches	
Solder pin length	4 mm	
Solder pin dimensions	0.5 x 0.75 mm	
Drilled hole diameter with tolerance	1.2 (-0.1 ... +0.1) mm	

PCB contact		
PCB contact	THT	
Solder pin arrangement	over the entire terminal strip (in-line)	
Number of solder pins per potential	1	

Material data		
Note (material data)	Information on material specifications can be found here	
Color	agate gray	
Material group	I	
Insulation material (main housing)	Polyamide (PA66)	
Flammability class per UL94	V0	
Clamping spring material	Chrome-nickel spring steel (CrNi)	
Contact material	Electrolytic copper (E _{Cu})	
Contact Plating	Tin	
Fire load	0.611 MJ	
Weight	15.4 g	



Environmental requirements	
Limit temperature range	-60 ... +105 °C

Commercial data	
Product Group	4 (Printed Circuit Connectors)
eCl@ss 10.0	27-44-04-01
eCl@ss 9.0	27-44-04-01
ETIM 9.0	EC002643
ETIM 8.0	EC002643
PU (SPU)	72 (18) pcs
Packaging type	Box
Country of origin	CH
GTIN	4044918304511
Customs tariff number	85369010000

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates

General approvals		Declarations of conformity and manufacturer's declarations
Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 60947	NTR NL 7833/2
CCA DEKRA Certification B.V.	EN 60998	NTR NL-7705/1
CSA DEKRA Certification B.V.	C22.2	1132097
KEMA/KEUR DEKRA Certification B.V.	EN 60947	2160584.18
KEMA/KEUR DEKRA Certification B.V.	EN 60998	71-124629
UL UL International Germany GmbH	UL 1059	E45172
		EU-Declaration of Confor- mity WAGO GmbH & Co. KG
		UK-Declaration of Confor- mity WAGO GmbH & Co. KG

Approvals for marine applications

Approval	Standard	Certificate Name
ABS American Bureau of Ship- ping	-	19-HG1869876-PDA
DNV DNV GL SE	-	TAE000016Z

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 250-708

↓

Documentation

Additional Information

Technical Section

03.04.2019

pdf

2027.26 KB

↓

CAD/CAE-Data

CAD data

2D/3D Models 250-708

↓

CAE data

EPLAN Data Portal 250-708

↓

ZUKEN Portal 250-708

↓

PCB Design

Symbol and Footprint via SamacSys 250-708

↓

Symbol and Footprint via Ultra Librarian 250-708


↓

1 Compatible Products

1.1 Optional Accessories


1.1.1 Ferrule

1.1.1.1 Ferrule




[Item No.: 216-241](#)

Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white




[Item No.: 216-141](#)

Ferrule; Sleeve for 0.5 mm² / 20 AWG; un-insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92




[Item No.: 216-242](#)

Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray




[Item No.: 216-262](#)

Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray




[Item No.: 216-142](#)

Ferrule; Sleeve for 0.75 mm² / 18 AWG; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92




[Item No.: 216-243](#)

Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red



[Item No.: 216-263](#)

Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red



[Item No.: 216-143](#)

Ferrule; Sleeve for 1 mm² / AWG 18; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92

Page 4/6

Version 18.03.2025

Continued on next page

Downloaded from [Arrow.com](https://www.arrow.com)



1.1.2 Marking

1.1.2.1 Marking strip



Item No.: 210-332/500-202
Marking strips; as a DIN A4 sheet; MARKED; 1-16 (160x); Height of marker strip: 3 mm; Strip length 182 mm; Horizontal marking; Self-adhesive; white



Item No.: 210-332/500-205
Marking strips; as a DIN A4 sheet; MARKED; 1-32 (80x); Height of marker strip: 3 mm; Strip length 182 mm; Horizontal marking; Self-adhesive; white



Item No.: 210-332/500-204
Marking strips; as a DIN A4 sheet; MARKED; 17-32 (160x); Height of marker strip: 3 mm; Strip length 182 mm; Horizontal marking; Self-adhesive; white



Item No.: 210-332/500-206
Marking strips; as a DIN A4 sheet; MARKED; 33-48 (160x); Height of marker strip: 3 mm; Strip length 182 mm; Horizontal marking; Self-adhesive; white

1.1.3 Test and measurement

1.1.3.1 Testing accessories



Item No.: 210-136
Test plug; 2 mm Ø; with 500 mm cable; red

1.1.4 Tool

1.1.4.1 Operating tool




Item No.: 210-719
Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft




Item No.: 210-647
Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft; multicoloured

Installation Notes




Space-saving wiring – push-in termination of solid conductors.




Testing with 2 mm Ø test plug – touch contact.

Conductor termination




Inserting solid conductors via push-in termination.
Inserting fine-stranded conductors via push-buttons, 250 Series – 3.5 mm pin spacing.

Conductor termination




Space-saving wiring, 250 Series – 5 mm pin spacing.

Testing




Testing with 11 mm Ø test pin, on the conductor, 250 Series – 2.5 ... 3.5 mm pin spacing.




Testing with 2 mm Ø test plug, touch contact, 250 Series – 5 mm pin spacing.

Marking



Labeling via self-adhesive strips or direct marking. Mixed-color terminal strips (with or without spacer) are available upon request.



Labeling via self-adhesive strips or direct marking. Mixed-color terminal strips (with or without spacer) are available upon request.