

Features

- RoHS lead-free-solder and lead-solder-exempted products are available
- 5 year warranty for RoHS compliant products with an extended temperature range
- Compliant to EN 45545 (version V104 or later)
- Input voltage up to 144 VDC
- Single output of 5.1 to 48 VDC
- No input-to-output isolation
- High efficiency up to 96%
- Extremely wide input voltage range
- Low input-to-output differential voltage
- Very good dynamic properties
- Input undervoltage lockout
- Output voltage adjustment and inhibit function
- Continuously no-load and short-circuit proof
- All boards are coated with a protective lacquer

Safety-approved to the latest edition of IEC/EN 60950-1 and UL/CSA 60950-1



Description

The PSB Series of positive switching regulators are designed as power supplies for electronic systems, where no input-to-output isolation is required. Their major advantages include a high level of efficiency, high reliability, low output ripple, and excellent dynamic response. Models with input voltages up to 144 V are specially designed for secondary switched and battery-driven mobile applications. The converters are suitable

for railway applications according to EN 50155 and EN 50121.

The case design allows for operation up to 71 °C. The PSB Series is designed for wall or chassis mounting with faston connectors.

Various options are available to adapt the converters to different applications.

Table of Contents

	Page		Page
Description	1	Electromagnetic Compatibility (EMC)	11
Model Selection	2	Immunity to Environmental Conditions	12
Functional Description	3	Mechanical Data	13
Electrical Input Data	4	Safety and Installation Instructions	13
Electrical Output Data	6	Description of Options	14
Auxiliary Functions	10	Accessories	15



Model Selection

Table 1: PSB Series

Output voltage $V_{o\ nom}$ [V]	Output current $I_{o\ nom}$ [A]	Operating input voltage range V_i [V]	Nom. input voltage $V_{i\ nom}$ [V]	Efficiency ²		Type designation	Options
				η_{min} [%]	η_{typ} [%]		
5.1	4 ³	15 – 144 ¹	60	76	80	PSB5A4-9iRG	L, C
5.1	6	8 – 80	40	79	82.5	PSB5A6-9iRG	-7, L, C, non-G
5.1	7	7 – 40	20	83	84.5	PSB5A7-9iRG	-7, L, P, C, non-G
5.1	8	7 – 40	20	82.5	84	PSB5A8-2iRG	non-G
12	3 ⁴	18 – 144 ¹	60	87	88.5	PSB123-9iRG	-7, L, C, non-G
12	5	15 – 80	40	89	90.5	PSB125-9iRG	-7, L, C, non-G
12	6	15 – 40	20	89.5	91	PSB126-2iRG	--
15	3 ⁴	22 – 144 ¹	60	89	90	PSB153-9iRG	-7, L, C, non-G
15	5	19 – 80	40	90.5	92.5	PSB155-9iRG	-7, L, C, non-G
15	6	19 – 40	30	91	92.5	PSB156-2iRG	--
24	3 ⁴	31 – 144 ¹	60	92.5	94	PSB243-9iRG	-7, L, C, non-G
24	5	29 – 80	50	93.5	95	PSB245-9iRG	-7, L, C, non-G
24	6	29 – 60	40	94	96	PSB246-2iRG	non-G
36	3 ⁴	44 – 144 ¹	80	94	95	PSB363-9iRG	-7, L, C, non-G
36	5	42 – 80	60	95.5	96.5	PSB365-9iRG	-7, L, C, non-G
48	3 ⁴	58 – 144 ¹	80	95.5	96.5	PSB483-9iRG	-7, L, C, non-G

¹ Surges up to 156 V for 2 s; see *Electrical Input Data*

² Efficiency at $V_{i\ nom}$ and $I_{o\ nom}$

³ $I_{o\ max} = 5\ A$ at $V_i \leq 80\ V$; for $V_i > 80\ V$, see fig. 4.

⁴ $I_{o\ max} = 4\ A$ at $V_i \leq 80\ V$; for $V_i > 80\ V$, see fig. 4.

NFND: Not for new designs.

Preferred for new designs

Note: The sequence of options must follow the order above.

Part Number Description

Positive switching regulator in case B02 PSB

Nominal output voltage in volt 5.1 to 48

Nominal output current in Ampère 3 to 8

Operational ambient temperature range T_A

–10 to 50 °C -2

–25 to 50 °C -5

–25 to 71 °C (option) -7

–40 to 71 °C -9

other (customer-specific models) -0

Input filter (option) L

Inhibit input (standard) i

Control input for output voltage adjustment¹ R

Potentiometer¹ (option) P

Thyristor crowbar (option) C

RoHS-compliant for all 6 substances G

¹ Feature R excludes option P and vice versa.

Note: The sequence of options must follow the order above.

PSB 12 3 -9 L i R C G

Example: PSB123-9LiRCG designates a positive switching regulator with output 12 V, 3 A, ambient temperature range of –40 to 71 °C, input filter, inhibit input, output adjust input, thyristor crowbar, and RoHS-compliant.

Customer-Specific Models

Positive switching regulator in case B01 PSB

Nominal output voltage in Volt (without decimals) 12


Decimal places:

0.0 V	Z
0.1 V	A
0.15 V	B
0.2 V	C
0.25 V	D
0.3 V	E
0.4 V	F
0.5 V	G
0.6 V	H
0.7 V	J
0.8 V	K
0.9 V	L
other	Y

Output current in Ampère 3

Identification character A, B, ...

Temperature range and options -9iRG

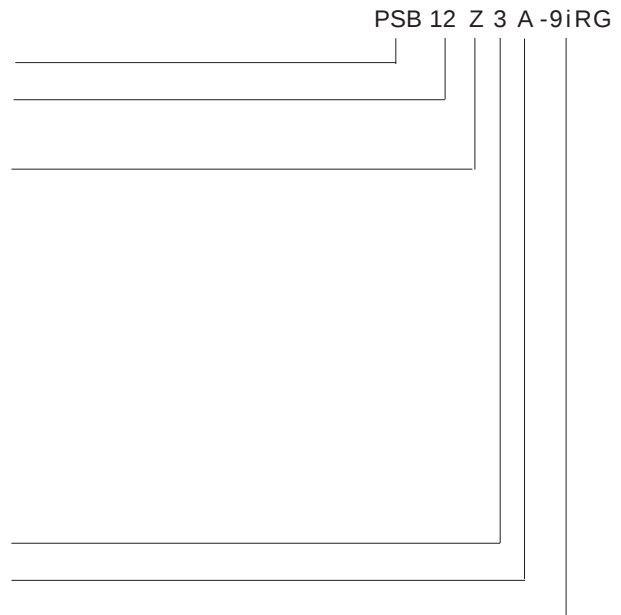

Produkt Marking

Type designation, applicable safety approval marks, warnings, pin allocation, patent nos., and company logo.

Input voltage range, nominal output voltage and current, pin allocation of auxiliary functions and options, and protection

degree. Identification of LED and the optional potentiometer.

Label with input voltage range, nominal output voltage and current, protection degree, batch no., serial no., and data code including production site, version (modification status), date of production.

Functional Description

This switching regulator uses the buck converter topology. The input is not electrically isolated from the output. During the on period of the switching transistor, current is transferred to the output, and energy is stored in the output choke. During the off period, this energy forces the current to keep flowing through the output, to the load, and back through the freewheeling diode. Regulation is accomplished by varying

the duty cycle (on/ratio) of the power switch. The regulator is equipped with a undervoltage lockout, but no overvoltage shutdown.

These regulators are ideal for a wide range of applications, where input to output isolation is not necessary, or where already provided by an external front end (e.g., a transformer with rectifier). To optimize customer's needs, additional options and accessories are available.

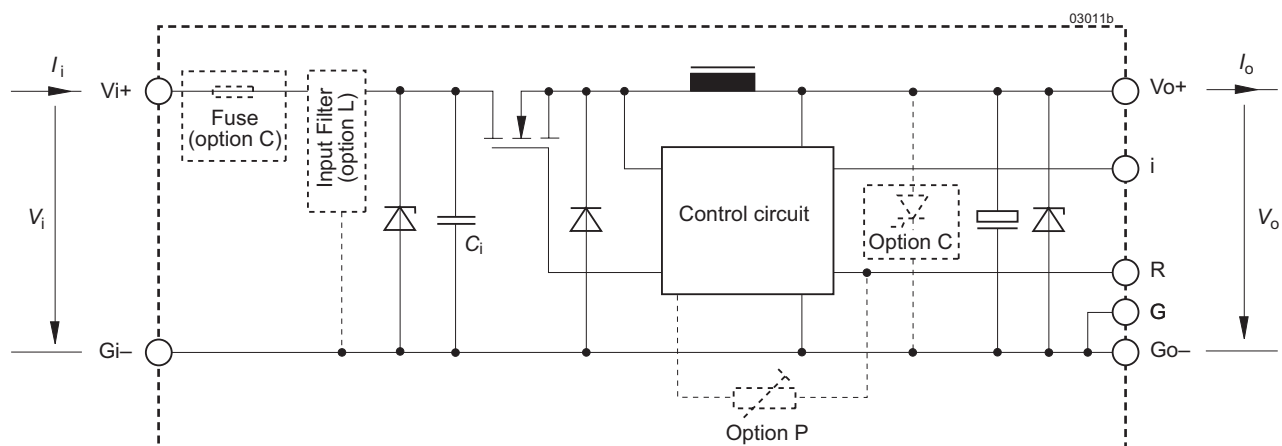


Fig. 1
Block diagram PSB

Electrical Input Data

General Conditions: $T_A = 25\text{ }^{\circ}\text{C}$, unless T_C is specified

Table 2a: Input data (-2 models)

Model			PSB5A8			PSB126			PSB156			PSB246			Unit
Characteristics		Conditions	min	typ	max	min	typ	max	min	typ	max	min	typ	max	
V_i	Operating input voltage	$I_o = 0 - I_{o\text{ nom}}$ $T_{C\text{ min}} - T_{C\text{ max}}$	7		40	15		40	19		40	29		60	V
$\Delta V_{io\text{ min}}$	Min. diff. voltage $V_i - V_o$				1.9			3			4			5	
$V_{i\text{ UVL}}$	Undervoltage lockout				7.3			7.3			7.3			12	
$I_{i\text{ o}}$	No load input current	$I_o = 0, V_{i\text{ min}} - V_{i\text{ max}}$			50			50			50			50	mA
$I_{i\text{ nr p}}$	Peak value of inrush current	$V_{i\text{ nom}}$			75			75			150			150	
R_i	Input resistance	no option L			10			10			10			10	m Ω
C_i	Input capacitance				13.6			13.6			13.6			13.6	
$V_{i\text{ RFI}}$	EN 55011, 0.15 – 30 MHz	$V_{i\text{ nom}}, I_{o\text{ nom}}$			A			A			A			A	Class

Tab. 2b: Input data

Model			PSB5A7			PSB5A6			PSB125			Unit
Characteristics		Conditions	min	typ	max	min	typ	max	min	typ	max	
V_i	Operating input voltage	$I_o = 0 - I_{o\text{ nom}}$ $T_{C\text{ min}} - T_{C\text{ max}}$	7		40	8		80	15		80	V
$\Delta V_{io\text{ min}}$	Min. diff. voltage ($V_i - V_o$)				1.9			2.9			3	
$V_{i\text{ UVL}}$	Undervoltage lockout				6.3			7.3			7.3	
$I_{i\text{ o}}$	No load input current	$I_o = 0, V_{i\text{ min}} - V_{i\text{ max}}$			45			40			35	mA
$I_{i\text{ nr p}}$	Peak value of inrush current	$V_{i\text{ nom}}$ without option L			75			150			150	
R_i	Input resistance				10			10			10	m Ω
C_i	Input capacity				13.6			13.6			13.6	
$I_{i\text{ nr p}}$	Peak value of inrush current	$V_{i\text{ nom}}$ with option L			100			180			180	A
R_i	Input resistance				340			340			340	
C_i	Input capacitance				484			344			344	μF
$V_{i\text{ RFI}}$	EN 55011 0.15 – 30 MHz	$V_{i\text{ nom}}, I_{o\text{ nom}}$ with option L			B			B			B	

Tab. 2c: Input data

Model			PSB155			PSB245			PSB365			Unit
Characteristics		Conditions	min	typ	max	min	typ	max	min	typ	max	
V_i	Operating input voltage	$I_o = 0 - I_{o\text{ nom}}$ $T_{C\text{ min}} - T_{C\text{ max}}$	19		80	29		80	42		80	V
$\Delta V_{io\text{ min}}$	Min. diff. voltage ($V_i - V_o$)				4			5			6	
$V_{i\text{ UVL}}$	Undervoltage lockout				7.3			12			19	
$I_{i\text{ o}}$	No load input current	$I_o = 0, V_{i\text{ min}} - V_{i\text{ max}}$			35			35			40	mA
$I_{i\text{ nr p}}$	Peak value of inrush current	$V_{i\text{ nom}}$ without option L			150			150			150	
R_i	Input resistance				10			10			10	m Ω
C_i	Input capacity				13.6			13.6			13.6	
$I_{i\text{ nr p}}$	Peak value of inrush current	$V_{i\text{ nom}}$ with option L			180			180			180	A
R_i	Input resistance				340			340			340	
C_i	Input capacitance				344			344			344	μF
$V_{i\text{ RFI}}$	EN 55011 0.15 – 30 MHz	$V_{i\text{ nom}}, I_{o\text{ nom}}$ with option L			B			B			B	

Tab. 2d: Input data. General Conditions as per table 2a

Model			PSB5A4			PSB123			PSB153			Unit
Characteristics	Conditions		min	typ	max	min	typ	max	min	typ	max	
V_i	Operating input voltage	$I_o = 0 - I_{o\text{ nom}}$	15		144 ¹	18		144 ¹	22		144 ¹	V
$\Delta V_{io\text{ min}}$	Min. diff. voltage ($V_i - V_o$)	$T_{C\text{ min}} - T_{C\text{ max}}$			9.9			6			7	
$V_{i\text{ UVL}}$	Undervoltage lockout			10			12			15		
I_{i0}	No load input current	$I_o = 0, V_{i\text{ min}} - V_{i\text{ max}}$			40			35			35	mA
$I_{inr\text{ p}}$	Peak value of inrush current	$V_{i\text{ nom}}$ without option L		150			150			150		A
R_i	Input resistance			10			10			10		mΩ
C_i	Input capacitance			4.4			4.4			4.4		μF
$I_{inr\text{ p}}$	Peak value of inrush current	$V_{i\text{ nom}}$ with option L		180			180			180		A
R_i	Input resistance			340			340			340		mΩ
C_i	Input capacity			104			104			104		μF
$V_{i\text{ RFI}}$	EN 55011 0.15 – 30 MHz	$V_{i\text{ nom}}, I_{o\text{ nom}}$ with option L ²		B ²			B ²			B ²		Class

Tab. 2e: Input data

Model			PSB243			PSB363			PSB483			Unit
Characteristics	Conditions		min	typ	max	min	typ	max	min	typ	max	
V_i	Operating input voltage	$I_o = 0 - I_{o\text{ nom}}$	31		144 ¹	44		144 ¹	58		144 ¹	V
$\Delta V_{io\text{ min}}$	Min. diff. voltage ($V_i - V_o$)	$T_{C\text{ min}} - T_{C\text{ max}}$			7			8			10	
$V_{i\text{ UVL}}$	Undervoltage lockout			19			29			40		
I_{i0}	No load input current	$I_o = 0, V_{i\text{ min}} - V_{i\text{ max}}$			35			40			45	mA
$I_{inr\text{ p}}$	Peak value of inrush current	$V_{i\text{ nom}}$ without option L		150			150			150		A
R_i	Input resistance			10			10			10		mΩ
C_i	Input capacity			4.4			4.4			4.4		μF
$I_{inr\text{ p}}$	Peak value of inrush current	$V_{i\text{ nom}}$ with option L		180			180			180		A
R_i	Input resistance			340			340			340		mΩ
C_i	Input capacitance			104			104			104		μF
$V_{i\text{ RFI}}$	EN 55011 0.15 – 30 MHz	$V_{i\text{ nom}}, I_{o\text{ nom}}$ with option L ²		B ²			B ²			B ²		Class

¹ Surges up to 156 V for 2 s

² With external input capacitor $C_i = 470\text{ μF}/200\text{ V}$ and option L

External Input Circuitry and Fuse

The sum of the lengths of the supply lines to the source or to the nearest capacitor $\geq 100\text{ μF}$ (a + b) should not exceed 5 m,

unless option L is fitted. This option is recommended in order to prevent power line oscillations and reduce superimposed interference voltages.

Regulators with option C are fitted with an input fuse.

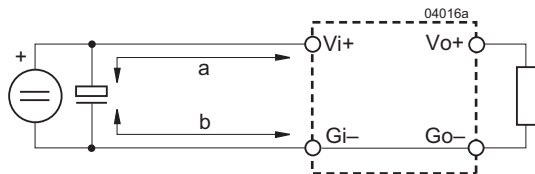


Fig. 2
Switching regulator with long supply lines.

Electrical Output Data

General conditions:

- $T_A = 25\text{ }^{\circ}\text{C}$, unless T_C is specified
- R-input open (or V_O set to $V_{O\text{ nom}}$ with option P)

Table 3a: Output data

Model			PSB5A8			PSB126			PSB156			PSB246			Unit			
Characteristics			Conditions			min	typ	max	min	typ	max	min	typ	max				
V _o	Output voltage		V _{i nom} , I _{o nom}			5.05		5.15	11.6		12.4	14.5		15.5	23.3		24.7	V
I _{o nom}	Output current		V _{i min} – V _{i max}			0		8.0	0		6.0	0		6.0	0		6.0	A
I _{oL}	Output current limitation		T _{C min} – T _{C max}			8.0		10.4	6.0		7.8	6.0		7.8	6.0		7.8	
v _o	Output voltage noise	Switching frequ.	V _{i nom} , I _{o nom}			40			150			200			300			mV _{pp}
		Total	IEC/EN 61204 BW = 20 MHz			45			160			210			310			
ΔV _{o v}	Static line regulation		V _{i min} – V _{i max} , I _{o nom}			100			240			300			480			mV
ΔV _{o i}	Static load regulation		V _{i nom} , I _o = 0 – I _{o nom}			100			180			200			300			
v _{o d}	Dynamic voltage regulation	Voltage deviation	V _{i nom}			150			360			450			700			
t _d		Recovery time	I _{o nom} ↔ ¹ / ₃ I _{o nom} IEC/EN 61204			100			120			120			160			μs
α _{V_o}	Temperature coefficient ΔV _o /ΔT _C (T _{C min} – T _{C max})		V _{i min} – V _{i max} I _o = 0 – I _{o nom}			±0.02			±0.02			±0.02			±0.02			%/K

Table 3b: Output data

Model			PSB5A7			PSB5A6			PSB125			Unit		
Characteristics			Conditions		min	typ	max	min	typ	max	min	typ	max	
V _O	Output voltage		V _{i nom} , I _{O nom}		5.07		5.13	5.07		5.13	11.93		12.07	V
I _{O nom0}	Output current		V _{i min} – V _{i max}		0		7.0	0		6.0	0		5.0	A
I _{OL}	Output current limitation		T _{C min} – T _{C max}		7.0		9.1	6.0		7.8	5.0		6.5	
v _o	Output voltage noise	Switching frequ.	V _{i nom} , I _{O nom}		15		25	15		35	25		45	mV _{pp}
		Total	IEC/EN 61204 BW = 20 MHz		19		29	19		39	29		49	
ΔV _{O V}	Static line regulation		V _{i min} – V _{i max} , I _{O nom}				100			100			240	mV
ΔV _{O I}	Static load regulation		V _{i nom} , I _O = 0 – I _{O nom}				100			100			120	
v _{O d}	Dynamic load regulation	Voltage deviat.	V _{i nom}				150			130			360	
t _d		Recovery time	I _{O nom} ↔ ¹ / ₃ I _{O nom} IEC/EN 61204				50			50			60	μs
α _{V_O}	Temperature coefficient ΔV _O /ΔT _C (T _{C min} – T _{C max})		V _{i min} – V _{i max} I _O = 0 – I _{O nom}				±0.02			±0.02			±0.02	%/K

Table 3c: Output data. General conditions as per table 3a

Model			PSB155			PSB245			PSB365			Unit
Characteristics		Conditions	min	typ	max	min	typ	max	min	typ	max	
V _o	Output voltage		V _{i nom} , I _{o nom}		14.91	15.09	23.68	24.14	35.78	36.22	V	
I _{o nom}	Output current		V _{i min} – V _{i max}		0	5.0	0	5.0	0	5.0	A	
I _{oL}	Output current limitation		T _{C min} – T _{C max}		5.0	6.5	5.0	6.5	5.0	6.5		
v _o	Output voltage noise	Switching freq.	V _{i nom} , I _{o nom}		40	70	45	120	70	180	mV _{pp}	
		Total	IEC/EN 61204 BW = 20 MHz		44	74	50	125	75	185		
ΔV _{o V}	Static line regulation		V _{i min} – V _{i max} , I _{o nom}		40	75	70	150	100	200	mV	
ΔV _{o I}	Static load regulation		V _{i nom} , I _o = 0 – I _{o nom}		30	65	70	120	120	160		
v _{o d}	Dynamic load regulation	Voltage deviat.	V _{i nom}		100		120		180			
t _d		Recovery time	I _{o nom} ↔ 1/3 I _{o nom} IEC/EN 61204		60		80		100			μs
α _{v0}	Temperature coefficient ΔV _o /ΔT _C (T _{C min} – T _{C max})		V _{i min} – V _{i max} I _o = 0 – I _{o nom}		±0.02		±0.02		±0.02		%/K	

Table 3d: Output data

Model			PSB5A4			PSB123			PSB153			Unit	
Characteristics			Conditions	min	typ	max	min	typ	max	min	typ	max	
V_o	Output voltage		$V_{i \text{ nom}}, I_o \text{ nom}$	5.07		5.13	5.07		5.13	11.93		12.07	V
$I_o \text{ nom}$	Output current nominal		$V_{i \text{ min}} - V_{i \text{ max}}$		4.0			4.0			4.0		A
$I_o \text{ max}$	Output current max		$V_{i \text{ min}} - 80 \text{ V}$		5.0			5.0			5.0		A
I_oL	Output current limitation		$T_C \text{ min} - T_C \text{ max}$		5.0		6.5	4.0		5.2	4.0		5.2
v_o	Output voltage noise	Switching frequ.	$V_{i \text{ nom}}, I_o \text{ nom}$		15	35		25	45		40	70	mV _{pp}
		Total	IEC/EN 61204 BW = 20 MHz		19	39		29	49		44	74	
ΔV_{oV}	Static line regulation		$V_{i \text{ min}} - V_{i \text{ max}}, I_o \text{ nom}$		20	45		30	55		50	75	mV
ΔV_{oI}	Static load regulation		$V_{i \text{ nom}}, I_o = 0 - I_o \text{ nom}$		20	35		25	40		30	65	
$v_{o d}$	Dynamic load regulation	Voltage deviat.	$V_{i \text{ nom}}$		100			100			100		
t_d		Recovery time	$I_o \text{ nom} \leftrightarrow \frac{1}{3} I_o \text{ nom}$ IEC/EN 61204		50			50			60		μs
α_{Vo}	Temperature coefficient $\Delta V_o / \Delta T_C (T_C \text{ min} - T_C \text{ max})$		$V_{i \text{ min}} - V_{i \text{ max}}$ $I_o = 0 - I_o \text{ nom}$		±0.02			±0.02			±0.02		%/K

Table 3e: Output data. General conditions as per table 3a

Model			PSB243			PSB363			PSB483			Unit
Characteristics		Conditions	min	typ	max	min	typ	max	min	typ	max	
V_o	Output voltage	$V_{i\text{ nom}}, I_{o\text{ nom}}$	23.86	24.14	35.78	36.22	47.71	48.29	V			
$I_{o\text{ nom}}$	Output current nominal	$V_{i\text{ min}} - V_{i\text{ max}}$		4.0		4.0		4.0	A			
$I_{o\text{ max}}$	Output current	$V_{i\text{ min}} - 80\text{ V}$		4.0		4.0		4.0	A			
I_{oL}	Output current limitation	$T_{C\text{ min}} - T_{C\text{ max}}$	4.0	5.2	4.0	5.2	5.0	5.2				
v_o	Output voltage noise	Switching freq.		45	120	70	180	90	190	mV _{pp}		
		Total		50	125	75	185	95	195			
ΔV_{oV}	Static line regulation	$V_{i\text{ min}} - V_{i\text{ max}}, I_{o\text{ nom}}$	70	150	100	200	150	300	mV			
ΔV_{oI}	Static load regulation	$V_{i\text{ nom}}, I_o = 0 - I_{o\text{ nom}}$	70	120	120	160	150	250				
v_{od}	Dynamic load regulation	Voltage deviat.		120		140		150				
t_d		Recovery time		80		100		100				μs
α_{V_o}	Temperature coefficient $\Delta V_o / \Delta T_C (T_{C\text{ min}} - T_{C\text{ max}})$			± 0.02		± 0.02		± 0.02	%/K			

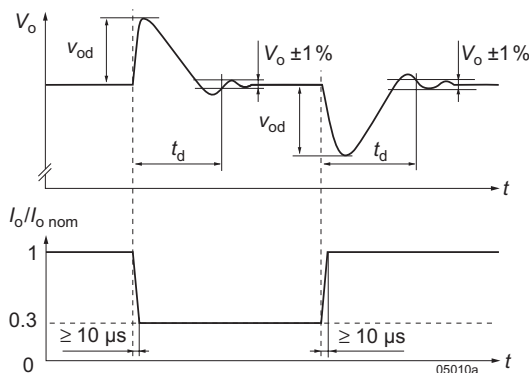


Fig. 3
Switching regulator with long supply lines.

Thermal Considerations

When a switching regulator is located in free, quasi-stationary air (convection cooling) at a temperature $T_A = 71\text{ °C}$ and is operated at $I_{o\text{ nom}}$, the case temperature T_C will be about 95 °C

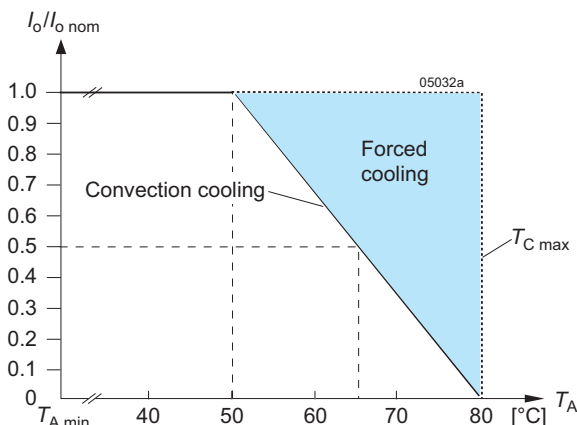


Fig. 4a
Output current versus temperature (models -2)

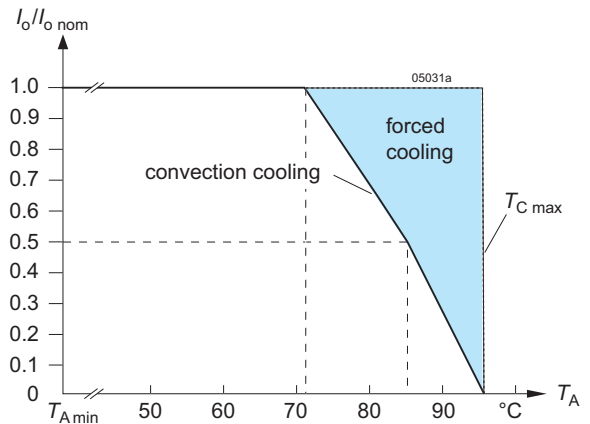


Fig. 4b
Output current versus temperature (models -7 or -9 and with $V_{i\text{ max}} \leq 80\text{ V}$)

after the warm-up phase, measured at the measuring point of case temperature T_C ; see *Mechanical Data*.

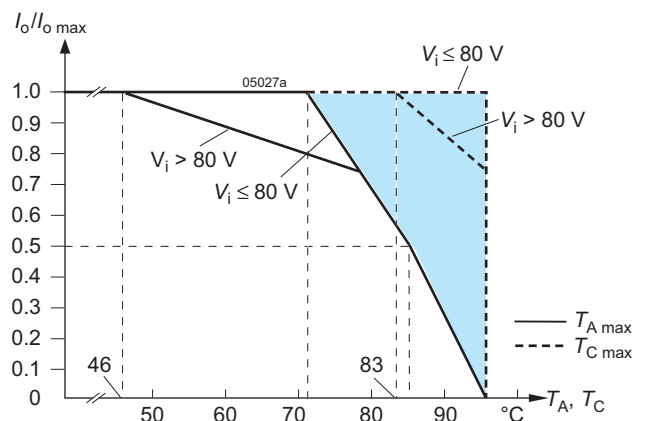


Fig. 4c
Output current versus temperature (models with $V_{i\text{ max}} = 144\text{ V}$)

Under practical operating conditions, T_A may exceed 71°C , provided that additional measures (heat sink, fan, etc.) are taken to ensure that the case temperature T_C does not exceed $T_{C\text{ max}}$.

The regulators with $V_{i\text{ max}} = 144\text{ V}$ withstand 156 V for 2 s in order to comply with railway standards. However, $I_{o\text{ max}}$ is only continuously available for $V_i \leq 80\text{ V}$ or for reduced T_A and T_C ; see fig. 4c.

For operation of regulators with $V_{i\text{ max}} = 144\text{ V}$ at $T_A \geq 46^\circ\text{C}$, an internal PTC (thermistor) starts reducing $I_{o\text{ L}}$, if V_i is greater than 80 V . At most unfavorable conditions, $I_{o\text{ L}}$ is reduced by 1 A ; see fig. 5.

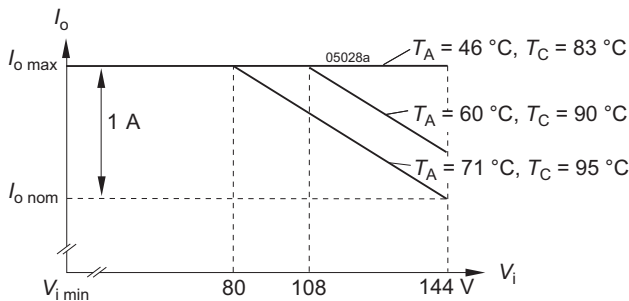


Fig. 5
Typ. dependance of $I_{o\text{ L}}$ of temperature

Output Protection and Short Circuit Behaviour

A voltage suppressor diode, which in worst case conditions fails into a short circuit (or a thyristor crowbar, option C), protects the output against an internally generated overvoltage. Such an overvoltage could occur due to a failure of either the control circuit or the switching transistor. The output protection is not designed to withstand externally applied overvoltages.

A constant current limitation circuit holds the output current almost constant, when an overload or a short circuit is applied to the output. It acts self-protecting and recovers automatically after removal of the overload or short circuit condition.

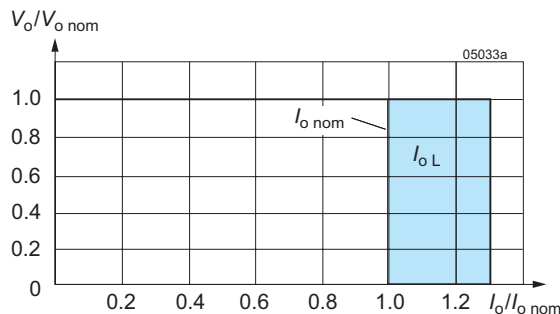


Fig. 6a
Short-circuit behaviour V_o vs. I_o for regulators with $V_{i\text{ max}} \leq 80\text{ V}$

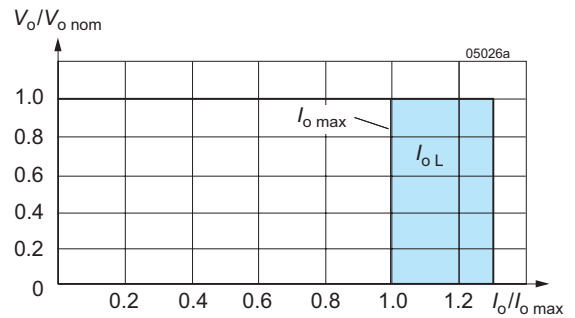


Fig. 6b
Short-circuit behaviour V_o versus I_o for regulators with $V_{i\text{ max}} = 144\text{ V}$.

Parallel and Series Connection

Outputs of equal nominal voltages can be parallel-connected. However, the use of a single regulator with higher output power, is always the better solution.

In parallel-connected operation, one or several outputs may operate continuously at their current limit knee-point which will cause an increase of the heat generation. Consequently, the max. ambient temperature should be reduced by 10 K .

Outputs can be series-connected with any other regulator. In series-connection the maximum output current is limited by the lowest current limitation, but electrically separated source voltages are needed for each regulator.

Auxiliary Functions

i Inhibit (Remote On / Off)

The inhibit input allows for disabling the switching regulator by a control signal. In systems with several converters, this

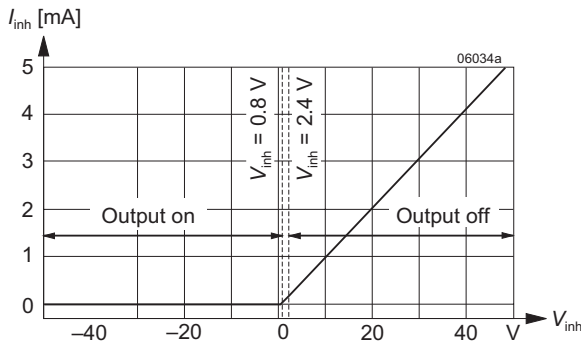


Fig. 7
Typical inhibit current I_{inh} versus inhibit voltage V_{inh}

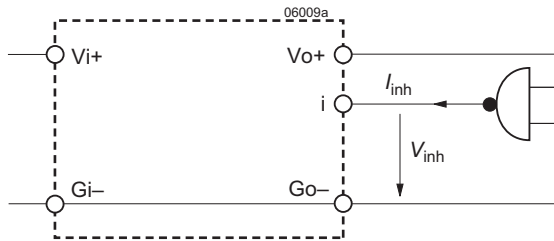


Fig. 8
Definition of I_{inh} and V_{inh}

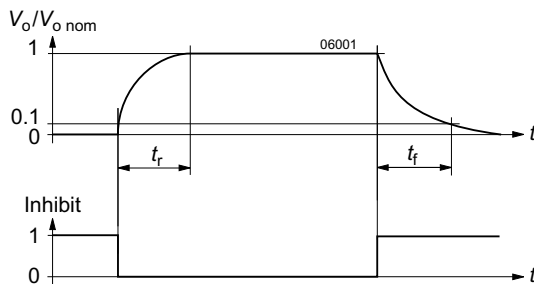


Fig. 9
Output response as a function of inhibit signal

Table 4: Inhibit characteristics

Characteristics	Conditions	min	typ	max	Unit
V_{inh} Inhibit input voltage	$V_o = \text{on}$	$V_{i \min} - V_{i \max}$	-50	+0.8	V
	$V_o = \text{off}$	$T_{C \min} - T_{C \max}$	+2.4	+50	
t_r Switch-on time	$V_i = V_{i \text{ nom}}$		130		ms
t_f Switch-off time	$R_L = V_{o \text{ nom}} / I_{o \text{ nom}}$		25		
$I_{i \text{ inh}}$ Input current when inhibited	$V_i = V_{i \text{ nom}}$		25		mA

feature can be used, for example, to control the activation sequence of converters by a logic signal. An output voltage overshoot will not occur at switch on.

Note: With open i-pin, the output is enabled.

R Output Voltage Adjust

Note: With open R input, $V_o \approx V_{o \text{ nom}}$.

The output voltage V_o can either be adjusted with an external voltage source (V_{ext}) or with an external resistor (R_1 or R_2). The adjustment range is 0 – 108% of $V_{o \text{ nom}}$. The minimum differential voltage $\Delta V_{io \text{ min}}$ between input and output (see *Electrical Input Data*) should be maintained.

a) $V_o = 0 - V_{o \text{ max}}$, using V_{ext} between pins R and G:

$$V_{\text{ext}} \approx 2.5 \text{ V} \cdot \frac{V_o}{V_{o \text{ nom}}} \quad V_o \approx V_{o \text{ nom}} \cdot \frac{V_{\text{ext}}}{2.5 \text{ V}}$$

Caution: To prevent damage, V_{ext} should not exceed 20 V, nor be negative.

b) $V_o = 0$ to $V_{o \text{ nom}}$, using R_{ext1} between pins R and G:

$$R_{\text{ext1}} \approx \frac{4000 \Omega \cdot V_o}{V_{o \text{ nom}} - V_o} \quad V_o \approx \frac{V_{o \text{ nom}} \cdot R_{\text{ext1}}}{R_{\text{ext1}} + 4000 \Omega}$$

c) $V_o = V_{o \text{ nom}}$ to $V_{o \text{ max}}$, using R_{ext2} between pins R and G:

$$R_{\text{ext2}} \approx \frac{4000 \Omega \cdot V_o \cdot (V_{o \text{ nom}} - 2.5 \text{ V})}{2.5 \text{ V} \cdot (V_o - V_{o \text{ nom}})}$$

$$V_o \approx \frac{V_{o \text{ nom}} \cdot 2.5 \text{ V} \cdot R_{\text{ext2}}}{2.5 \text{ V} \cdot (R_{\text{ext2}} + 4000 \Omega) - V_{o \text{ nom}} \cdot 4000 \Omega}$$

Caution: To prevent damage, R_{ext2} should never be less than 47 k Ω .

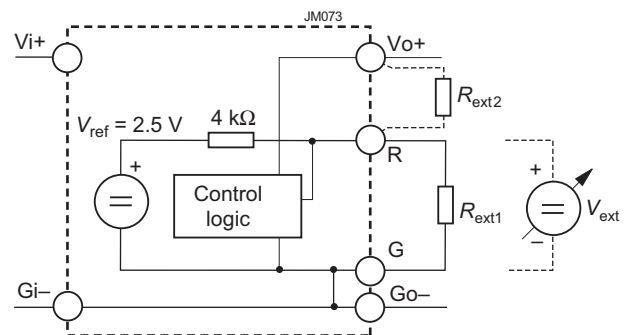


Fig. 10
Output voltage adjustment via R-input

LED Output Voltage Indicator

A yellow LED indicator is illuminated, when the output voltage is higher than approx. 3 V (not for -2 models).

Electromagnetic Compatibility (EMC)

Electromagnetic Immunity

Table 5: Immunity type tests

Phenomenon	Standard	Class Level	Coupling mode ¹	Value applied	Waveform	Source Imped.	Test procedure	In oper.	Perf. crit. ²
Voltage surge ³	IEC 60571-1	3	i/c, +i/-i	800 V _p	100 µs	100 Ω	1 pos. and 1 neg. surge per coupling mode	yes	B
				1500 V _p	50 µs				
				3000 V _p	5 µs				
				4000 V _p	1 µs				
				7000 V _p	100 ns				
Electrostatic discharge	IEC/EN 61000-4-2	3 ³ 2 ⁴	contact discharge to case	6000 V _p ³ 4000 V _p ⁴	1/50 ns	330 Ω	10 positive and 10 negative discharges	yes	B ⁴ ⁵
Electromagnetic field	IEC/EN 61000-4-3	3 ³ 2 ⁴	antenna	10 V/m ³ 3 V/m ⁴	AM 80% 1 kHz		80 – 1000 MHz	yes	A
Electrical fast transients/burst	IEC/EN 61000-4-4	3	i/c, +i/-i	2000 V _p	bursts of 5/50 ns 5 kHz rep. rate transients with 15 ms burst duration and a 300 ms period	50 Ω	60 s positive 60 s negative transients per coupling mode	yes	A ⁵ , B ⁴
Surges	IEC/EN 61000-4-5	2 ³	i/c	1000 V _p	1.2/50 µs	12 Ω	5 pos. and 5 neg. surges per coupling mode	yes	A ⁵
		2 ³	+i/-i	500 V _p		2 Ω			
Conducted disturbances	IEC/EN 61000-4-6	3 ³ 2 ⁴	i, o, signal wires	10 VAC ³ 3 VAC ⁴	AM 80% 1 kHz	150 Ω	0.15 – 80 MHz	yes	A

¹ i = input, o = output, c = case.

² A = Normal operation, no deviation from specifications, B = Normal operation, temporary loss of function or deviation from specs possible

³ Not applicable for -2 models

⁴ Valid for -2 models

⁵ Option L necessary; with option C, manual reset might be necessary.

Electromagnetic Emission

For emission levels refer to *Electrical Input Data*.

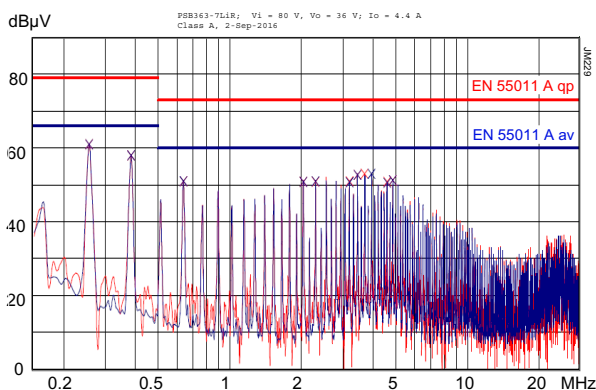


Fig. 11

Typical disturbance voltage (quasi-peak) at the input as per EN 55011, measured at V_{i nom}, I_{o nom}, PSB363-7LiR

Immunity to Environmental Conditions

Table 6: Mechanical and climatic stress

Test Method		Standard	Test Conditions		Status
Cab	Damp heat steady state	IEC/EN 60068-2-78 MIL-STD-810D section 507.2	Temperature: Relative humidity: Duration:	40 $\pm$ 2 °C 93 $\pm$ 2/-3 % 56 days	Regulator not operating
Ea	Shock (half-sinusoidal)	IEC/EN 60068-2-27 MIL-STD-810D section 516.3	Acceleration amplitude: Bump duration: Number of bumps:	50 g _n = 490 m/s ² 11 ms 18 (3 each direction)	Regulator operating
Fc	Vibration (sinusoidal)	IEC/EN 60068-2-6 MIL-STD-810D section 514.3	Acceleration amplitude: Frequency (1 Oct/min): Test duration:	0.35 mm (10 – 60 Hz) 5 g _n = 49 m/s ² (60 – 2000 Hz) 10 – 2000 Hz 7.5 h (2.5 h each axis)	Regulator operating
Fda	Random vibration wide band Reproducibility high	IEC/EN 60068-2-35 DIN 40046 part 23	Acceleration spectral density: Frequency band: Acceleration magnitude: Test duration:	0.05 g ² /Hz 20 – 500 Hz 4.9 g _{n rms} 3 h (1 h each axis)	Regulator operating
Kb	Salt mist, cyclic (sodium chloride NaCl solution)	IEC/EN 60068-2-52	Concentration: Duration: Storage: Storage duration: Number of cycles:	5% (30 °C) 2 h per cycle 40 °C, 93% rel. humidity 22 h per cycle 3	Regulator not operating

Temperatures

Table 7: Temperature specifications, valid for an air pressure of 800 - 1200 hPa (800 - 1200 mbar)

Temperature		-2		-7		-9 (Option)		Unit
Characteristics	Conditions	min	max	min	max	min	max	
T _A Ambient temperature ¹	Regulator operating	-10	50	-25	71	-40	71	°C
T _C Case temperature		-10	80	-25	95	-40	95	
T _S Storage temperature ¹	Non operational	-25	100	-40	100	-55	85	

¹ See Thermal Considerations and Overtemperature Protection.

Reliability

Table 8: Typical MTBF and device hours

MTBF	Ground Benign	Ground Fixed		Ground Mobile	Device Hours ¹
MTBF accord. to MIL-HDBK-217F	T _C = 40 °C	T _C = 40 °C	T _C = 70 °C	T _C = 50 °C	
	625 000 h	207 000 h	96 000 h	46 000 h	13 000 000 h

¹ Statistical values, based on an average of 4300 working hours per year and in general field use

Mechanical Data

Dimensions in mm.

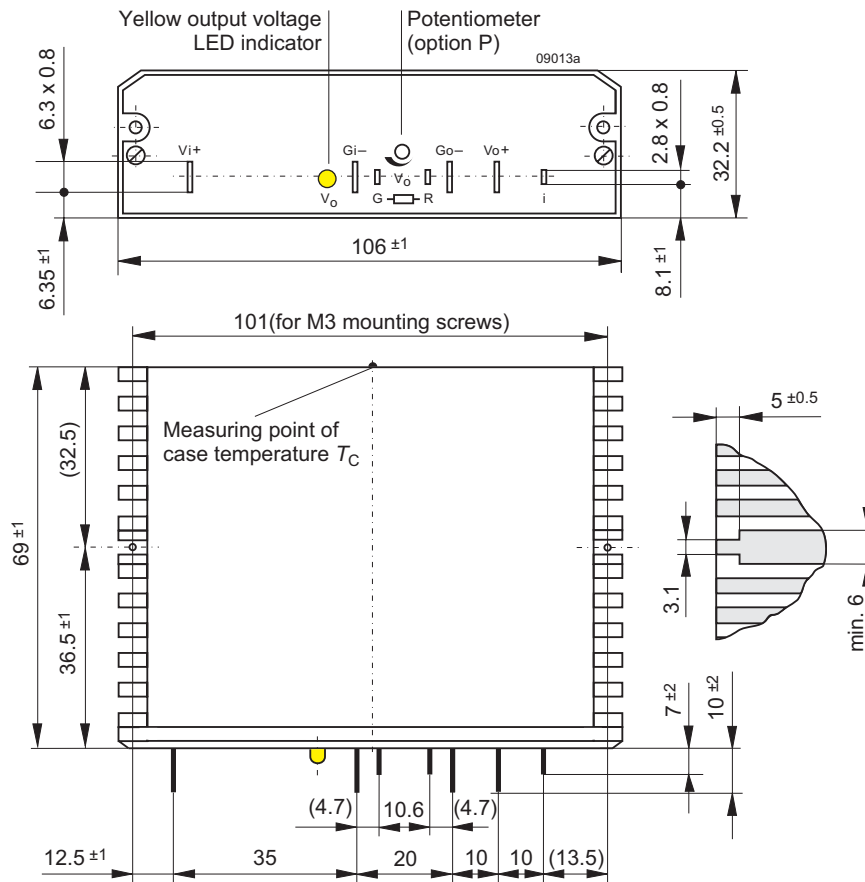


Fig. 12
Case B02, weight 230 g
Aluminum, black finish (EP
powder coated), self cooling

Safety and Installation Instructions

Installation Instruction

Installation must strictly follow the national safety regulations in compliance with the enclosure, mounting, creepage, clearance, casualty, markings, and segregation requirements of the end-use application.

Check for hazardous voltages before connecting.

The input and the output circuit are not separated, i.e., the negative path is internally interconnected.

Do not open the regulator !

Ensure that a regulator failure (e.g., by an internal short-circuit) does not result in a hazardous condition.

Cleaning Liquids and Protection Degree

In order to avoid possible damage, any penetration of cleaning

fluids must be prevented, since the power supplies are not hermetically sealed.

The protection degree is IP 30 (IP 20 with option P).

Standards and Approvals

All switching regulators have been approved according to the latest edition of IEC/EN 60950-1 and UL/CSA 60950-1.

The regulators have been evaluated for:

- Building in
- The use in a pollution degree 2 environment
- Connecting the input to a secondary circuit, which is subject to a maximum transient rating of 1500 V.

The switching regulators are subject to manufacturing surveillance in accordance with the above mentioned standards and with ISO 9001:2008.

Isolation

Electric strength test voltage between input connected with output against case: 1500 VDC, ≥ 1 s (for some PSB models only with version V103 or higher).

These tests are performed in the factory as routine test in accordance with EN 50514 and IEC/EN 60950. The electric strength test should not be repeated by the customer.

Railway Application

The regulators have been developed observing the railway standards EN 50155 and EN 50121. All boards are coated with a protective lacquer.

Description of Options

-9 Extended Temperature Range

This option defines an extended temperature range as specified in table 7.

P Potentiometer

Note: Option P is not recommended, if several regulators are operated in parallel connection.

Option P excludes R function; the R-input (pin 16) should be left open-circuit. The output voltage V_o is preset to 108 % of $V_{o\text{ nom}}$ and can be adjusted in the range 90 – 108% of $V_{o\text{ nom}}$.

However, the minimum differential voltage $\Delta V_{i\text{ o min}}$ between input and output specified in *Electrical Input Data* should be observed.

L Input Filter

Option L is recommended to reduce superimposed interference voltages and to prevent oscillations, if input lines exceed the length of approx. 5 m in total. The fundamental wave (approx. 120 kHz) of the reduced interference voltage between V_{i+} and G_{i-} has, with an input line inductance of 5 μH , a maximum magnitude of 4 mVAC.

The input impedance of the switching regulator at 120 kHz is

about 3.5 Ω . The harmonics are small in comparison with the fundamental wave.

With option L, the maximum permissible additionally superimposed ripple v_i of the input voltage (rectifier mode) at a specified input frequency f_i has the following values:

$$V_{i\text{ max}} = 10 V_{pp} \text{ at } 100 \text{ Hz or } V_{pp} = 1000 \text{ Hz} / f_i \times 1 \text{ V}$$

C Thyristor Crowbar

Option C protects the load against power supply malfunction. It is not designed to sink external currents. A fixed-value monitoring circuit checks the output voltage V_o . When the trigger voltage $V_{o\text{ c}}$ (see table 9) is reached, the thyristor crowbar triggers and disables the output. It can be deactivated by removal of the input voltage. In case of a defect switching transistor, the internal fuse prevents excessive current.

Type of the fuse:

- Regulators with $I_{o\text{ nom}} = 3 \text{ A}$: 5 A / 250 V, slow, 5 $\times$ 20 mm
- Regulators with $I_{o\text{ nom}} > 3 \text{ A}$: 8 A / 250 V, slow, 5 $\times$ 20 mm

Note: The crowbar can be reset by removal of the input voltage only. The inhibit signal cannot deactivate the thyristor.

G RoHS Compliance

Models with G are RoHS-compliant for all six substances.

Table 9: Crowbar trigger levels

Characteristics		Conditions	$V_o = 5.1 \text{ V}$			$V_o = 12 \text{ V}$			$V_o = 15 \text{ V}$			$V_o = 24 \text{ V}$			$V_o = 36 \text{ V}$			Unit
			min	typ	max	min	typ	max	min	typ	max	min	typ	max	min	typ	max	
$V_{o\text{ c}}$	Trigger voltage	$T_{C\text{ min}} - T_{C\text{ max}}$	5.8		6.8	13.5		16	16.5		19	27		31	40		45	V
t_s	Delay time	$V_{i\text{ min}} - V_{i\text{ max}}$ $I_o = 0 - I_{o\text{ nom}}$			1.5			1.5			1.5			1.5			1.5	μs

Accessories

A variety of electrical and mechanical accessories are available, including:

- Insulation plate HZZ01205-G for easy and safe PCB-mounting; see fig. 13.
- Solder-tags for direct mounting of the regulator to a PCB board; see fig. 14.
- Ring core chokes for ripple and interference reduction.
- Battery sensor [S-KSMH...] for using the regulator as battery charger. Different cell characteristics can be selected; see Temperature Sensor Data Sheet BCD20024 on our web site.

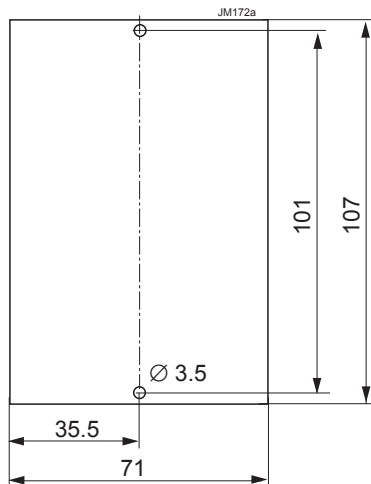


Fig. 13
Insulation plate HZZ01205-G
 0.3 mm thick




Fig. 14
Solder tag HZZ01204-G
 Delivery content: 10 pieces

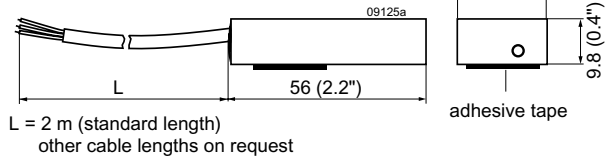


Fig. 15
Battery temperature sensor



Fig. 16
Different filters

For additional accessory product information, see the accessory data sheets listed with each product series at our web site.

NUCLEAR AND MEDICAL APPLICATIONS - These products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.

Copyright © 2018, Bel Power Solutions Inc. All rights reserved.

belfuse.com/power-solutions