

#### APRA1804G3Z

Request Samples



Check Inventory (>)



18 x 18 x 4.0 mm RoHS/RoHS II Compliant MSL Level = 1

## **Features**

- Complies with Automotive Qualification (AEC-Q200)
- Complies with IATF 16949 Certification
- Multiband GNSS patch with GPS/GLONASS/BeiDou/Galileo
- Low Return loss
- RHCP polarization
- Wide operating temperature  $(-40^{\circ}\text{C to } +105^{\circ}\text{C})$
- Peak Gain of 4.7 dBi
  - o GPS: 2.5 dBi
  - o GLONASS: 4.7 dBi
  - o BeiDou: 3.5 dBi

## **Applications**

- GNSS applications
- Automotive
- IoT, M2M, V2X
  - Industrial IoT
    - Infrastructure IoT
    - Consumer IoT
- Navigation
- Logistics
- Geofencing
- Remote monitoring
- Surveying and mapping systems

#### **Product Dimension**







## APRA1804G3Z

Request Samples (>)



Check Inventory (>)



18 x 18 x 4.0 mm **RoHS/RoHS II Compliant** MSL Level = 1

## **Electrical Specifications**

| Parameter           |                     | Unit         |                      |     |  |  |
|---------------------|---------------------|--------------|----------------------|-----|--|--|
| Operating Band      | GPS / Galileo       | GLONASS      | BeiDou               |     |  |  |
| Operating Frequency | $1575.42 \pm 1.023$ | $1602 \pm 5$ | $1561.098 \pm 2.046$ | MHz |  |  |
| Peak Gain           | 2.0                 | 2.0 4.0 3.0  |                      |     |  |  |
| Max VSWR            |                     | 3            |                      |     |  |  |
| Impedance           |                     | Ω            |                      |     |  |  |
| Polarization        |                     | RHCP         |                      |     |  |  |

#### Note:

Ground Plane size: 70 x 70 mm

Actual Electrical Value will depend on the size of ground plane in use

## **Mechanical Specifications**

| Parameter         | Specification                |
|-------------------|------------------------------|
| Antenna Dimension | 18 x 18 x 4 mm               |
| Material          | Ceramic                      |
| Termination       | Silver                       |
| Mounting Type     | Through-Hole + Adhesive Tape |

## **Environmental Specifications**

| Parameter   | Specification  |
|---|--|
| Operating Temperature                               | -40°C to +105°C  |
| Storage Temperature                                 | -40 C to +103 C  |
| Frequency Temperature Coefficient (T <sub>f</sub> ) | $-40 ^{\circ}\text{C to} + 105 ^{\circ}\text{C}  (0 \pm 20 \text{ppm/}^{\circ}\text{C})$ |
| RoHS / RoHS II Compliant                            | Yes  |
| MSL   | 1  |
| Environmentally Friendly                            | Pb free  |
| Relative Humidity                                   | 0~95%  |



**REVISED: 07-16-21** 



## APRA1804G3Z

Request Samples (>)



Check Inventory (>)




18 x 18 x 4.0 mm **RoHS/RoHS II Compliant** MSL Level = 1

## **Product Marking**



### **Product Dimension**

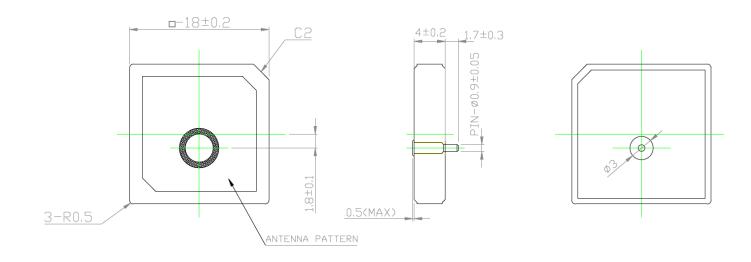

Unit: mm



5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com

**REVISED: 07-16-21** 



## APRA1804G3Z





Check Inventory (>)




18 x 18 x 4.0 mm **RoHS/RoHS II Compliant** MSL Level = 1

## **Layout Dimensions**

Top Side Ground ØЗ Ø0.95 Thru hole


Bottom Side

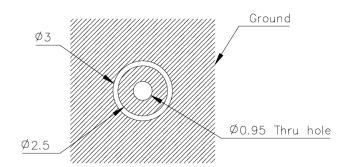

 $TOL:\pm0.2$ 

Unit: mm

## **Tape Dimensions**

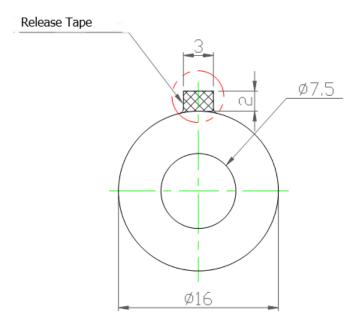

NITTO – NO.5015 | Double-coated thin adhesive tape | Thickness : 0.12 mm

Unit: mm



5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com

**REVISED: 07-16-21** 



## APRA1804G3Z

Request Samples (>)




Check Inventory (>)




18 x 18 x 4.0 mm RoHS/RoHS II Compliant MSL Level = 1

## VNA Test Measurement – Set up

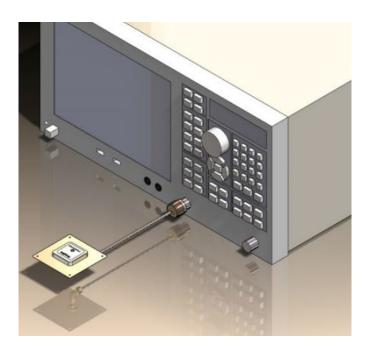


## Radiation Measurement - Set up





YZ-Plane





5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com

**REVISED: 07-16-21** 



#### APRA1804G3Z

Request Samples (>)




Check Inventory (>)



18 x 18 x 4.0 mm **RoHS/RoHS II Compliant** MSL Level = 1

### **Test Measurement – Return Loss**

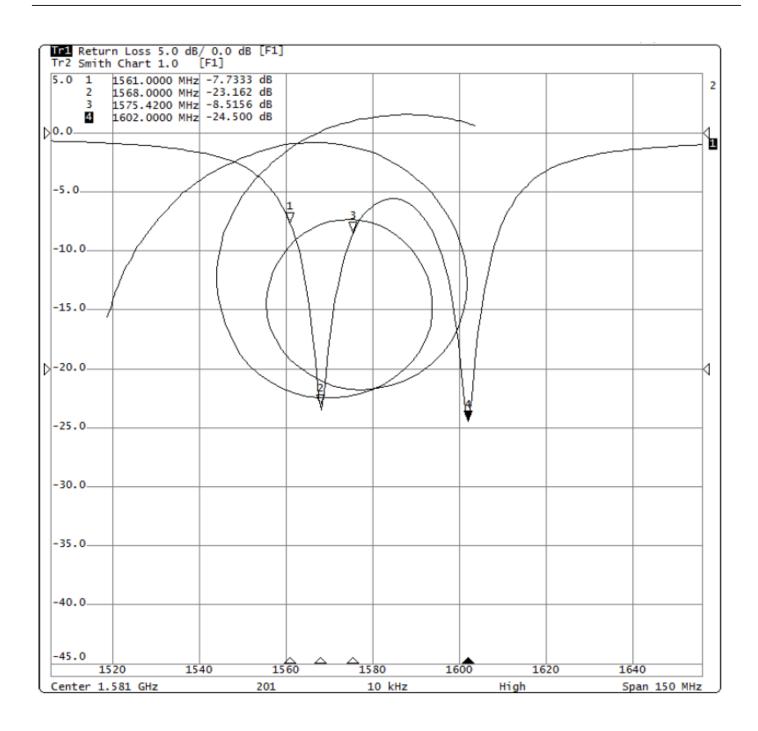



5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com

**REVISED: 07-16-21** 



## APRA1804G3Z

Request Samples (>)




Check Inventory (>)



18 x 18 x 4.0 mm RoHS/RoHS II Compliant MSL Level = 1

#### Radiation Measurement — 2D Pattern

## **XZ + YZ Plane : 1575.42 MHz**

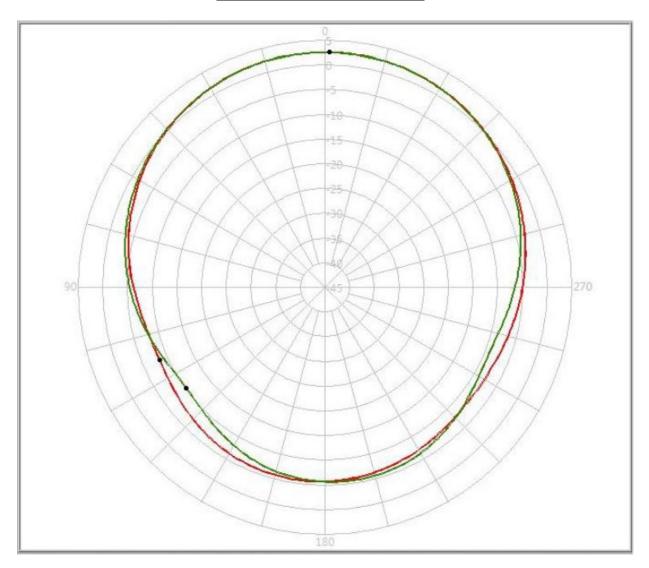

| Pati | tern | Test Mode | Freq(MHz) | Max Gain(dBi) | Min Gain(dBi)   | Avg. Gain(dBi) | Source Polar. |
|------|------|-----------|-----------|---------------|-----------------|----------------|---------------|
| 1    |      | XZ        | 1575.42   | 2.57 / 358.99 | -8.44 / 113.58  | -1.97          | V+H           |
| 1 2  |      | YZ        | 1575.42   | 2.56 / 358.99 | -10.26 / 126.05 | -2.07          | V+H           |



5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com

**REVISED: 07-16-21** 



## APRA1804G3Z

Request Samples (>)




Check Inventory (>)



18 x 18 x 4.0 mm RoHS/RoHS II Compliant MSL Level = 1

## **XZ + YZ - Plane : 1561 MHz**

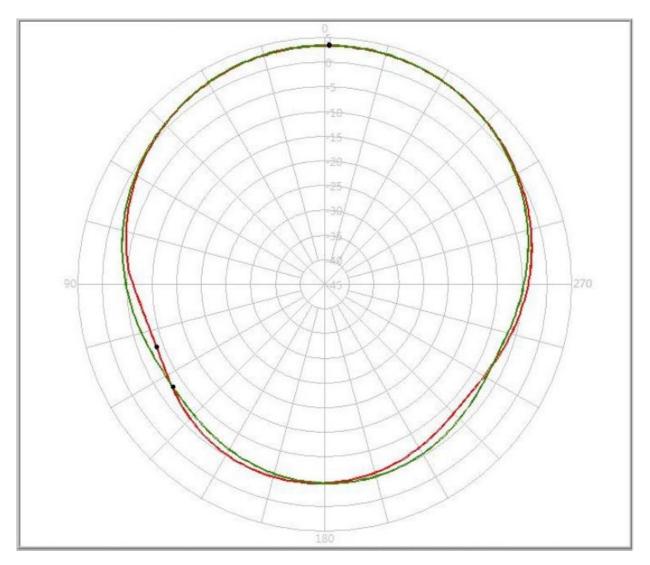

| Patt | ern | Test Mode | Freq(MHz) | Max Gain(dBi) | Min Gain(dBi)  | Avg. Gain(dBi) | Source Polar. |
|------|-----|-----------|-----------|---------------|----------------|----------------|---------------|
| 1 2  |     | XZ        | 1561.00   | 3.32 / 358.99 | -8.68 / 110.54 | -1.18          | V+H           |
| 2    |     | YZ        | 1561.00   | 3.45 / 358.99 | -7.91 / 124.03 | -1.11          | V+H           |



5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com

**REVISED: 07-16-21** 



## APRA1804G3Z

Request Samples (>)




Check Inventory (>)



18 x 18 x 4.0 mm RoHS/RoHS II Compliant MSL Level = 1

## XZ + YZ - Plane: 1602 MHz

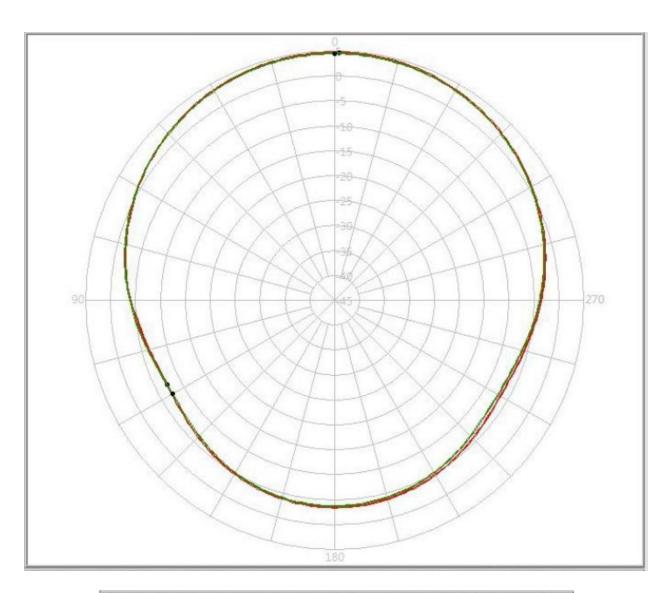

| Pa | attern | Test Mode | Freq(MHz) | Max Gain(dBi) | Min Gain(dBi)  | Avg. Gain(dBi) | Source Polar. |
|----|--------|-----------|-----------|---------------|----------------|----------------|---------------|
| 1  |        | XZ        | 1602.00   | 4.72 / 358.99 | -7.34 / 116.62 | 0.08           | V+H           |
| 2  | 2      | YZ        | 1602.00   | 4.52 / 0.00   | -7.37 / 120.00 | -0.08          | V+H           |





## APRA1804G3Z

Request Samples (>)




Check Inventory (>)



18 x 18 x 4.0 mm RoHS/RoHS II Compliant MSL Level = 1

## **Axial Ratio**

## 1575.42 MHz

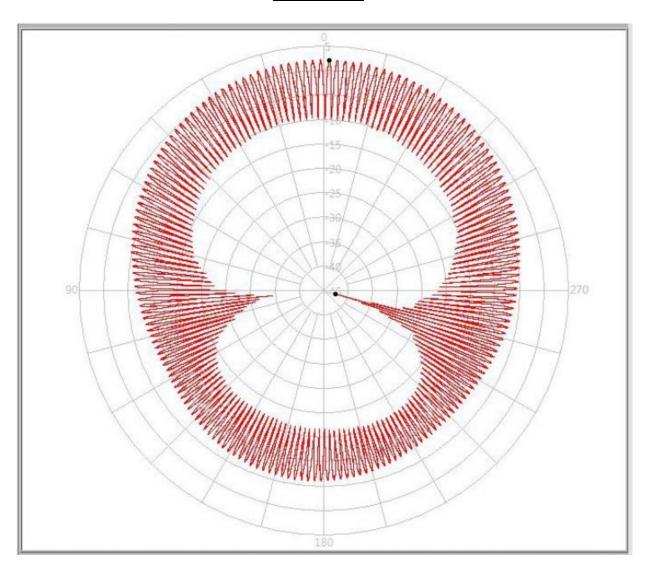

|   | 2000 | Test Mode   | Freq(MHz) | Max Gain(dBi) | Min Gain(dBi)   | Avg. Gain(dBi) | Source Polar. |
|---|------|-------------|-----------|---------------|-----------------|----------------|---------------|
| 1 |      | Axial Ratio | 1575.42   | 2.07 / 358.60 | -42.48 / 253.60 | -5.27          | СР            |





## APRA1804G3Z

Request Samples (>)




Check Inventory (>)



18 x 18 x 4.0 mm RoHS/RoHS II Compliant MSL Level = 1

## 1561 MHz

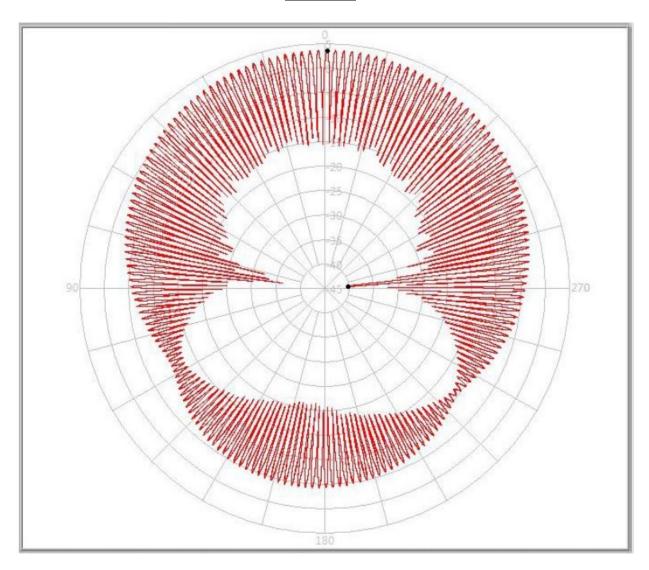

| Patt | ern | Test Mode | Freq(MHz) | Max Gain(dBi) | Min Gain(dBi)   | Avg. Gain(dBi) | Source Polar. |
|------|-----|-----------|-----------|---------------|-----------------|----------------|---------------|
| 1    |     |           |           |               | -40.14 / 274.46 |                | CP            |



5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com

**REVISED: 07-16-21** 



## APRA1804G3Z

Request Samples (>)




Check Inventory (>)



18 x 18 x 4.0 mm RoHS/RoHS II Compliant MSL Level = 1

## **1602 MHz**

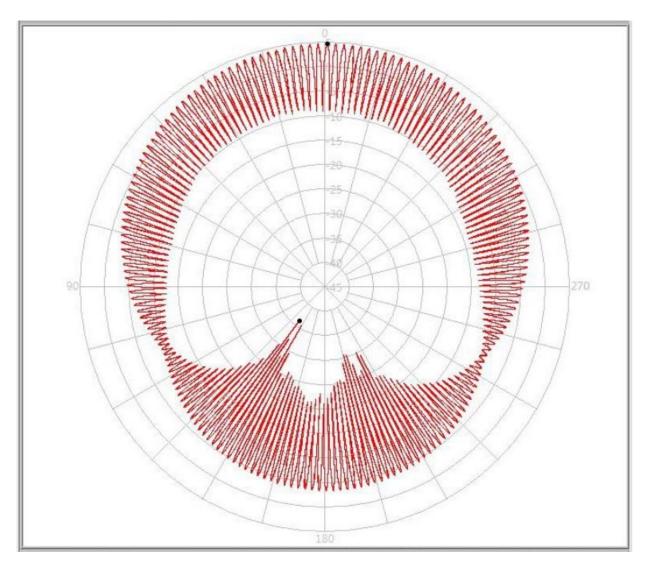

| Pattern | Test Mode   | Freq(MHz) | Max Gain(dBi) | Min Gain(dBi)   | Avg. Gain(dBi) | Source Polar. |
|---------|-------------|-----------|---------------|-----------------|----------------|---------------|
| 1       | Axail Ratio | 1602.00   | 4.55 / 359.40 | -36.39 / 143.50 | -2.97          | CP            |



5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com

**REVISED: 07-16-21** 



#### APRA1804G3Z

Request Samples



Check Inventory (>)



18 x 18 x 4.0 mm RoHS/RoHS II Compliant MSL Level = 1

## **Soldering Condition**

• Soldering should be done in 3 seconds by a feed pin of maximum temperature +290 °C.

#### **Precautions**


- Soldering: Do not direct solder onto the silver electrode of the antenna pattern.
- Antenna pattern uses an Ag / Ni / Sn electrode. Do not use the patch antenna in a corrosive gaseous atmosphere for example sulfur gas, chlorine gas.
- Ultrasonic cleaning: Ultrasonic vibration may cause deterioration & destruction of the component. Please avoid ultrasonic cleaning.

## **Packaging Information**

Dimensions of the Carton: 330 x 280 x 254 mm

Number of pcs per Carton: 800

## DA Tray Packaging (25 pcs/Tray)





5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com

**REVISED: 07-16-21** 



#### APRA1804G3Z

Request Samples




Check Inventory (>)




18 x 18 x 4.0 mm RoHS/RoHS II Compliant MSL Level = 1

Inner Box Packaging: 200 pcs (8 Trays x 25 pcs)

Outer Box Packaging: 800 pcs (4 inner box x 200 pcs)



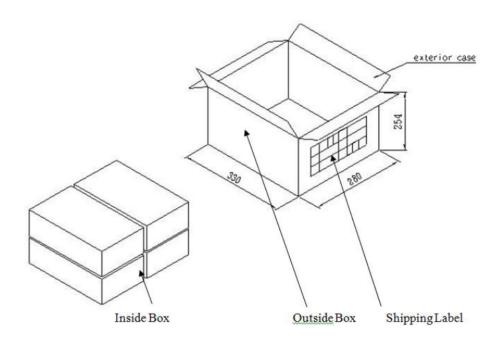

Unit: mm

ATTENTION: Abracon LLC's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependent Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon LLC is required. Please contact Abracon LLC for more information.



5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com

**REVISED: 07-16-21**