

# TRIO-BAT/PB/24DC/1.2AH - Battery module



1394729

<https://www.phoenixcontact.com/us/products/1394729>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Battery module (device with battery), VRLA-AGM, 24 V DC, 1.2 Ah



## Product description

The perfect addition to the TRIO UPS modules. Battery modules with lead AGM technology are fully charged before being sent to our warehouse.

## Your advantages

- Long buffer times under normal conditions
- Convenient panel mounting or DIN rail mounting
- Comprehensive approval package, compatible with TRIO UPS
- TRIO UPS modules have a uniform design
- Easy handling with preassembled cables and fuse holders
- Immediate availability: All energy storage systems leave our warehouse fully charged

## Commercial data

Item number	1394729
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	CM24
Product key	CMUEV3
GTIN	4063151776725
Weight per piece (including packing)	2,229 g
Weight per piece (excluding packing)	1,972 g
Customs tariff number	85072080
Country of origin	CN

# TRIO-BAT/PB/24DC/1.2AH - Battery module



1394729

<https://www.phoenixcontact.com/us/products/1394729>

## Technical data

### Notes

#### General

Note on the battery	This product contains a battery with a limited shelf life that must be charged every few months. The product packaging indicates when the battery must be started up or recharged. The general shelf life can be found in the energy storage devices area under "Latest startup".
---------------------	---

### Energy storage

#### Input

Input voltage	24 V DC (SELV)
Nominal capacity	1.2 Ah
Charging current	max. 0.36 A
End-of-charge voltage	27.6 V (20 °C)

#### Output

Output current	max. 15 A
Output fuse	1x 15 A T 15A 32V, ATOF 287 from Littelfuse
Buffer time	20 min (2 A)
	5 min (5 A)
End-of-discharge voltage	19.2 V

#### General

Connection in parallel	yes
Battery type	BB Battery BP1.2-12FR
Battery technology	VRLA-AGM
IQ-Technology	no
Latest startup date (battery only)	3 Months (0 °C ... 20 °C)
	1 Months (30 °C ... 40 °C)
Latest startup (battery only) - range	1 Months ... 3 Months (20 °C ... 30 °C)
Accumulator module service life (according to Eurobat)	6 (20 °C)
Size designation	Block
Temperature sensor	no

### Product properties

Product type	Battery module
Product family	Battery module (device with battery)
Application	TRIO-UPS-2G
Disposal	Used batteries must not be thrown away with household waste, they should instead be disposed of in accordance with applicable national regulations.

#### Insulation characteristics

# TRIO-BAT/PB/24DC/1.2AH - Battery module



1394729

<https://www.phoenixcontact.com/us/products/1394729>

Protection class	III
Degree of pollution	2

## Dimensions

### Item dimensions

Width	52 mm
Height	141 mm
Depth	108 mm

### Installation dimensions

Installation distance right/left	0 mm / 0 mm
Installation distance top/bottom	5 mm / 5 mm

## Mounting

Mounting type	DIN rail mounting
Mounting position	horizontal DIN rail NS 35, EN 60715

## Material specifications

Housing material	Metal
------------------	-------

## Cable/line

### Battery connecting cable:

Cable cross section	2.5 mm <sup>2</sup>
AWG/kcmil	14
Cable length	2000 mm
Color	red

### Battery connecting cable:

Cable cross section	2.5 mm <sup>2</sup>
AWG/kcmil	14
Cable length	2160 mm
Color	black

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP20
Ambient temperature (storage/transport)	-20 °C ... 40 °C
Ambient temperature (charge)	0 °C ... 40 °C
Ambient temperature (discharge)	-20 °C ... 50 °C
Max. permissible relative humidity (operation)	≤ 95 %

## Ex data

Suited for EX-applications	no
----------------------------	----


TRIO-BAT/PB/24DC/1.2AH - Battery module



1394729  
https://www.phoenixcontact.com/us/products/1394729


Drawings

Graphic

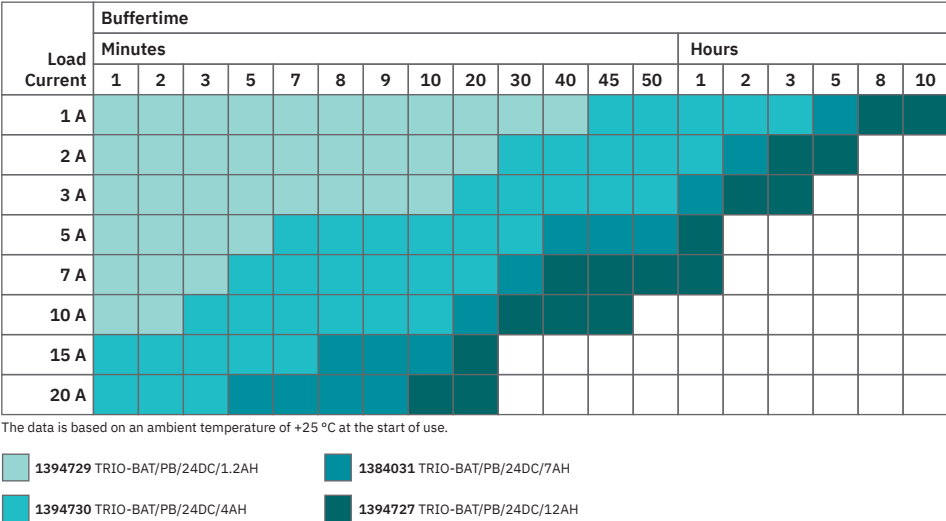

TRIO battery buffer times for TRIO DC UPS

Graphic

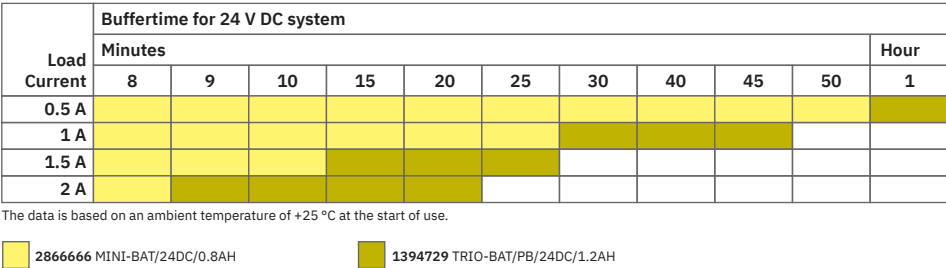

TRIO battery buffer times for MINI DC UPS

# TRIO-BAT/PB/24DC/1.2AH - Battery module



1394729

<https://www.phoenixcontact.com/us/products/1394729>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1394729>



**IECEE CB Scheme**

Approval ID: DK-139600-UL

**DNV**

Approval ID: TAA00002EW



**cULus Listed**

Approval ID: E123528



**cULus Listed**

Approval ID: E199827-20230421

# TRIO-BAT/PB/24DC/1.2AH - Battery module



1394729

<https://www.phoenixcontact.com/us/products/1394729>

## Classifications

### ECLASS

ECLASS-13.0	27050403
-------------	----------

### ETIM

ETIM 9.0	EC000357
----------	----------

# TRIO-BAT/PB/24DC/1.2AH - Battery module



1394729

<https://www.phoenixcontact.com/us/products/1394729>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

### China RoHS

Environment friendly use period (EFUP)	EFUP-8
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

### EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
-------------------------------------	----------------------

### EF3.0 Climate Change

CO2e kg	17.35 kg CO2e
---------	---------------

Phoenix Contact 2025 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)