

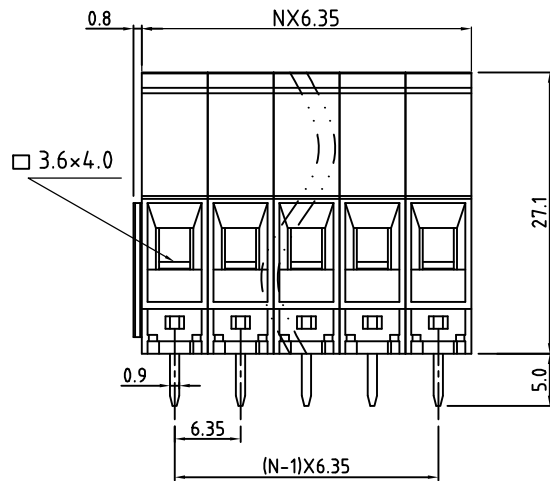


N=Number of contacts

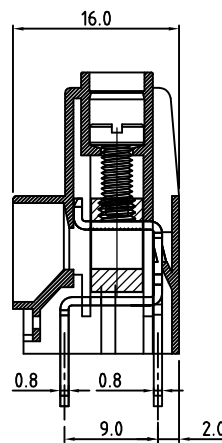

P.C.B. LAYOUT

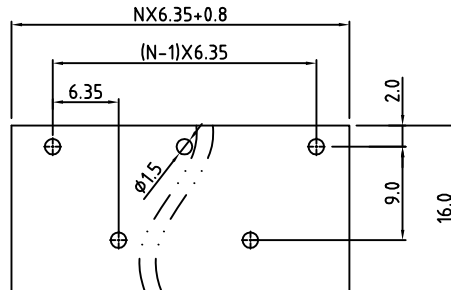

Technical Data:

Electrical

Pitch: 6.35MM

Voltage rating: 300V

Current rating: 30 Amps

Contact resistance: 20mΩ(max)

Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs

Wire range: 6-20AWG

Wire strip length: 8-9MM

Mechanical:

Torque: 8.0kgf.cm/M3

Operating temperature: -40°C to +105°C

Soldering temperature:

Temperature= 250°C±10°C / 5 seconds max

Safety approval (pending):

RoHS Compliance

Part No.: **OSTKPXX0150**

No. of Poles

02 2 Poles

03 3 Poles

... ..

24 24 Poles

COLOR

0: Black

2: Red

3: Orange

4: Yellow

5: Green (Standard)

6: Blue

8: Grey

Nonstandard colors
Mins could apply

4	Screw	Steel / M3.0	Cr3+ plated	1xN
3	Contact	Copper Alloy	Ni plated	1xN
2	Terminal	Copper Alloy	Tin plated	1xN
1	Body	PA66 UL94V-0		1
ITEM	NAME OF PART	MATERIAL	NOTES	Q"TY
DWG.	DATE	UNITS:	MM	SHEET: 1 OF 1
CHK.	DATE	SCALE:	NONE 2:1 (:)	REV.: A
APP.	DATE	TITLE:	OSTKP SERIES 6.35 MM SOLDER PINS STAGGERED (WITHOUT COVER)	
		PART NO.	OSTKPXX0150	X.X ±0.50
		DWG NO.	OSTKPXX0150.DWG	X.XX ±0.30
				X* ±0.10
				X* ±1°

REV	△	SIGN	DESCRIPTION	CHK.	DATE
-----	---	------	-------------	------	------



ON-SHORE TECHNOLOGY, INC.

