




Home> Products > MICRO SWITCH™ Toggle Switches> TL > Product Page

14TL1-10A

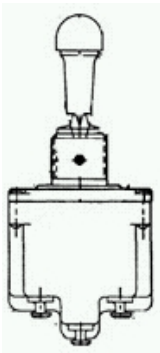

Actual product appearance may vary.

TL Series Toggle Switch, 4 pole, 3 position, Solder terminal, Locking Lever

Features


- Environmentproof sealing
- 1,2, and 4 pole circuitry
- Standard and pull-to-unlock levers
- 2 and 3 position, maintained and momentary toggle action
- Temperature range: -85° F to +160° F
- Completely sealed switching chamber
- Step-design case provides added space between terminals to help prevent shorting
- UL recognized, CSA certified
- CE approved

Description

MICRO SWITCH™TL Series toggle switches have high strength, temperature resistant, non-tracking case material and silver cadmium oxide contacts. Pull-to-Unlock toggle levers prevent accidental operation; the lever must be pulled approx. 2,3 mm (0.09 inches) to change positions.

Supporting Documentation

-  [Accessory: Seals](#)
-  [Accessory: Nuts](#)

Product Specifications																			
Circuitry/Operating action	<table><tr><th>Keyway Position</th><th>Center Position</th><th>Opposite Keyway Position</th></tr><tr><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td></tr><tr><td>ON</td><td>OFF</td><td>ON</td></tr></table>	Keyway Position	Center Position	Opposite Keyway Position													ON	OFF	ON
Keyway Position	Center Position	Opposite Keyway Position																	
ON	OFF	ON																	
Product Type	MICRO SWITCH™ Toggle Switch																		
Lever Lock	 Locked in three position																		
Ampere/Voltage Range (Resistive Load)	0.75 A at 115 Vdc,0.5 A at 250 Vdc,0.5 A to 20 A at 0.5 Vdc to 28 Vdc,0.5 A to 15 A at 0.5 Vac to 277 Vac																		
Circuitry	4PDT																		
Action	3 position																		
Mounting	Bushing 15/32 in																		
Termination	Solder																		
Lever Type	Locking																		
UL/CSA Rating Code	L191: 15 A - 125, 250, 277 Vac; 1/2 Hp - 125 Vac; 1 Hp - 250, 277 Vac; 5 A - 120 Vac "L"																		
Comment	Single turret solder lug termination																		
Availability	Global																		
UNSPSC Code	30211908																		
UNSPSC Commodity	30211908 Toggle switches																		
Series Name	TL																		

Keyword Search

Search for product and support information.

All Sensing and Control

Product Search

Part number search:

Use (*) to expand search

Specification Search